
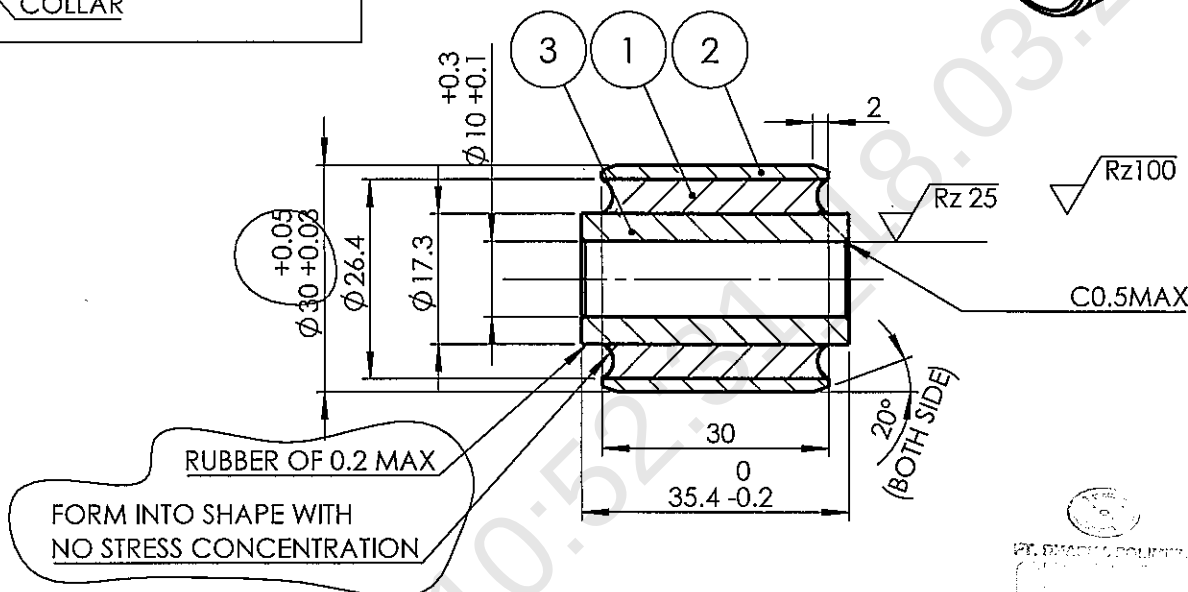

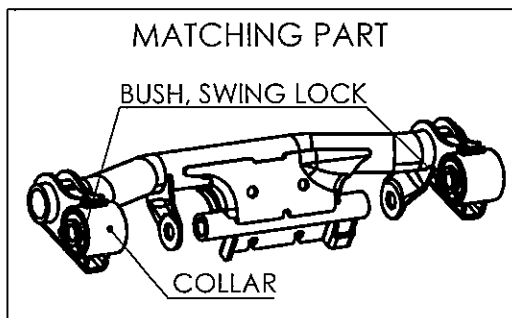


REVISION RECORD				
REV. LETTER	CHANGE NO.	DESCRIPTION	DATE	APPR.
A	LJJA-F-79	Drawing based on 3D LJJA-F-79	24.04.18	CISKA
B	LJJA-F-100	Drawing based on 3D LJJA-F-100, change dimensions	27.12.18	CISKA


THIS DRAWING CONTAINS PROPRIETARY AND CONFIDENTIAL INFORMATION AND DATA EXCLUSIVELY OWNED BY PT. DHARMA POLIMETAL AND IS NOT TO BE COPIED REPRODUCED, OR OTHERWISE DISCLOSED TO OTHERS



NOTE

- 1) SPRING RATE ; $160 \pm 25\% \text{kg.cm}/10^\circ$
 - 2) BOND STRENGTH ; $40 \text{Kg}/\text{cm}^2$ MIN(T.P.VALUE)
 - 3) MATERIAL OF NO.1 : AIII 7010C or BII 7010 (HES C201)
 - 4) OZONE RESISTANCE : NO OZONE CRACKS SHALL BE DETECTED AFTER EXPOSURE TO AIR (50pphm OZONE) AT $40 \pm 2^\circ \text{C}$, STRECHED $20 \pm 2\%$ IN LENGTH FOR 200h.
METHOD : JIS K 6259 RUBBER, VULCANIZED OR THERMOPLASTICS -DETERMINAZTION OF OZONE RESISTANCE.
 - 5) DURABILITY TEST
 1. TORSION TEST: 3.0×10^5 CYCLES OF $\pm 4^\circ$ (5Hz) NORMAL TEMPERATURE
 2. PRYING TEST : 3.0×10^5 STROKES OF $\pm 1.2 \text{mm}$ (5Hz) NORMAL TEMPERATURE
- AFTER DURABILITY TEST
1. NO TROUBLE SUCH AS CRACKS AND PEELING SHALL BE DETECTED
 2. CHANGE IN SPRING RATE SHALL BE $\pm 15\% \text{MAX}$.

3	50353-LJJA-N000-22	PIPE, INNER	1	STAM390G, $\phi 17.3 \times 3.4$	STAM390G, $\phi 17.3 \times 3.4$	x
2	50353-LJJA-N000-21	PIPE, OUTER	1	STAM390G, $\phi 30 \times 2.3$	STAM390G, $\phi 30 \times 2.3$	x
1	50353-LJJA-N000-20	RUBBER	1	AIII7010C, BLACK	AIII7010C (BLACK)	x

-		50353-LJJA-N002		BUSH SWING LOCK		1		NOTED		NOTED		Approx. Mass.			
ITEM No		PART No.		PART NAME		QTY.		MATERIAL		MATERIAL SIMPLIFICATION		-			
HR		DATE		271218		DIMENSION IN INCHES		 PT. DHARMA POLIMETAL JL. ANGSANA RAYA BLOK A 9 No. 8, DELTA SILICON 1, CIKARANG TITLE : BUSH SWING LOCK (LINK, ENG HANGER)							
AHM		DRAWN BY :		CISKA		FRACTIONS ±								1/32	
Q		CHKD BY :		RUBI		.000 ±								.005	
Q		APPD BY :		SANDYA		.00 ±								.015	
Q		DEP. ENG.		DANIEL		.0 ±								.030	
NF		FINISH				ANGLES ±		1/2°		SCALE 1:1 SOLIDWORKS Sheet 3 of 3					
NF						HOLE DIA +		.004							
NF						-		.002							
NF						DIMENSION IN METRIC		GENERAL ±						JIS B 0405-M	
NF						ANGLES ±		1/2°							
NF						HOLE DIA +		0.10							
NF						-		0.05							
NF						DO NOT SCALE THIS DRAWING TOLERANCES		BREAK ALL SHARP EDGES FILLET .030 MAX		  REV. LETTER B					
NF						MACHINED SURFACES 125		UNLESS OTHERWISE SPECIFIED							
NF						BREAK ALL SHARP EDGES									
NF															
NF															

PT. DHARMA POLIMETAL

JL. ANGSA NA RAYA BLOK A 9 No. 8, DELTA SILICON 1, CIKARANG

TITLE:

BUSH SWING LOCK

(LINK, ENG HANGER)

ORIGINAL DWG:

50353-LJJA-N005

CUSTOMER:

PT. AHM

SIZE

DWG. No.

A4

50353-LJJA-N002

SCALE

1:1

SOLIDWORKS

REV. LETTER

B

Sheet 3 of 3