
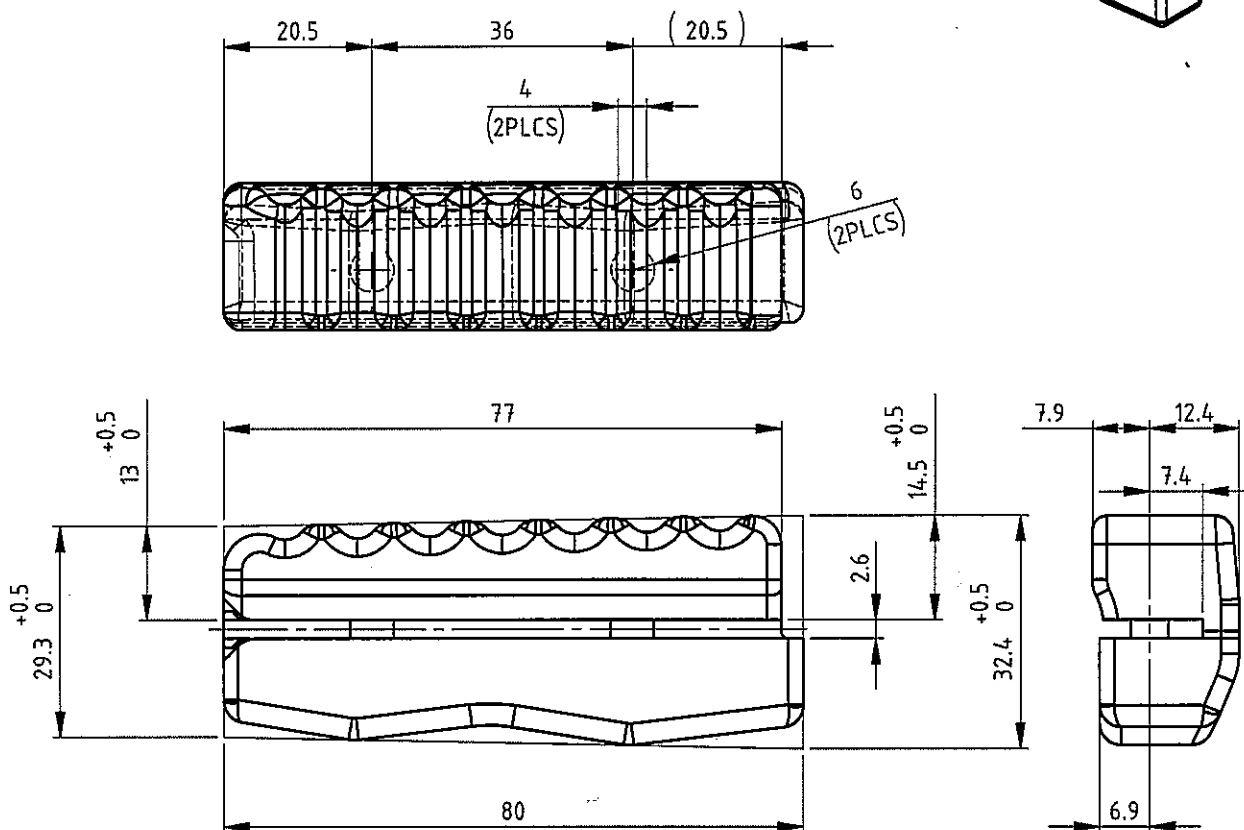

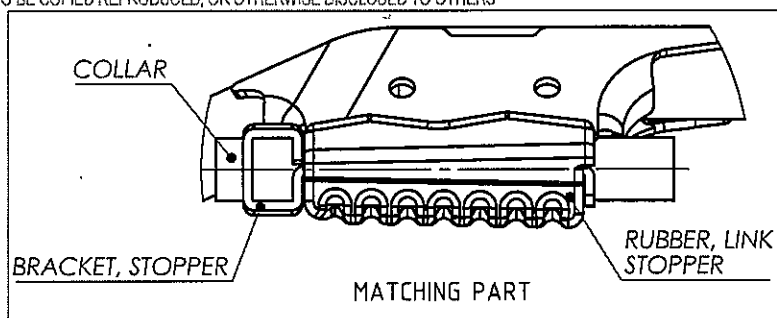


REVISION RECORD

REV. LETTER	CHANGE NO.	DESCRIPTION	DATE	APPR.
A	K0JA-F-60	Drawing based on 3D K0JA-F-60	23.04.18	IMA

THIS DRAWING CONTAINS PROPRIETARY AND CONFIDENTIAL INFORMATION AND DATA EXCLUSIVELY OWNED BY PT. DHARMA POLIMETAL AND IS NOT TO BE COPIED REPRODUCED, OR OTHERWISE DISCLOSED TO OTHERS



NOTE

1. DIMENSIONS AND SHAPE NOT SPECIFIED SHALL FOLLOW 3D DATA
2. RAW MATERIAL COLOR : BLACK
3. R MAY BE APPLIED TO EDGES IN 3D DATA R MAX SHALL BE 0.5 (NOTE THAT THIS RULE IS NOT APPLIED TO EDGES OF RIB ROOTS, INSERT DIE, AND DIE PARTING AREA.)
4. VOLUME ELECTRIC RESISTIVITY : 107 $\Omega \cdot \text{cm}$ MIN. (MEASURED IN ACCORDANCE WITH JIS K6271 OR ASTM D257)
5. ABSOLUTE VALUE DIFFERENCE OF VOLUME CHANGE IN TOLUENE IMMERSION TEST IS WITHIN 10% COMPARED TO TEST PIECE MEETING SPEC. (TEST METHOD : JIS K6258 TEST CONDITION: R.T. X 72h)
6. MATERIAL : HES C201 AI5010b (1.3 $\pm$ 0.2 MPa AT 100% MODULUS, 3.7 $\pm$ 0.6 MPa AT 300% MODULUS.)
7. OPERATING CHARACTERISTICS (SEE SPEC AND FIG.2) (2.9-6.5N.m AT 7deg, -8.7--14.5N.m AT -7deg)



16/11/18 TS.

1	50352-K0JA-N000	RUBBER, LINK STOPPER	1	AI5010b (BLACK)	AI5010b (BLACK)	Approx. Mass. 0.034 Kg
ITEM No	PART No.	PART NAME	QTY.	MATERIAL	MATERIAL SIMPLIFICATION	
HA	DATE	09.11.18	PT. DHARMA POLIMETAL JL. ANGSA RAYA BLOK A 9 No. 8, DELTA SILICON 1, CIKARANG TITLE : RUBBER, LINK STOPPER (LINK ASSY) ORIGINAL DWG : 50351-K0JA-N004 CUSTOMER : PT. AHM SIZE A4 DWG. No. 50352-K0JA-N002 SCALE 1:1 SOLIDWORKS Sheet 2 of 2			
Q	DRAWN BY:	IMA				
Q	CHKD BY:	RUBI				
Q	APPD BY:	SANDYA				
Q	DEP. ENG.	DANIEL				
Q	FINISH					
NF	BREAK ALL SHARP EDGES		DIMENSION IN INCHES FRACTIONS $\pm$ 1/32 .000 $\pm$.005 .00 $\pm$.015 .0 $\pm$.030 ANGLES $\pm$ 1/2° HOLE DIA $\pm$.004 .002 DIMENSION IN METRIC GENERAL $\pm$ JIS B 0405-M ANGLES $\pm$ 1/2° HOLE DIA $\pm$ 0.10 .05 DO NOT SCALE THIS DRAWING TOLERANCES BREAK ALL SHARP EDGES FILLET .030 MAX MACHINED SURFACES 125/ UNLESS OTHERWISE SPECIFIED			