LONGi SOLAR

# Hi-MO X10 Scientist

## LR7-72HVH

## 640~670M

### Advanced:
TOP Efficiency,+5% Power,More Yield.

### Value-Added:
A+ Anti-Shading[1],Less Loss.

### Aesthetic:
No Gridlines,Scenario Integration.

### Safe:
Prevent Overheating,Lower temperature under shade 60℃+[2] compare with conventional modules

HPBC 2.0 | TaiRay | N-type

Monofacial Power Generation

**15Y** Product Warranty | **30Y** Performance Warranty

### Complete System and Product Certifications

IEC 61215,IEC 61730

IEC62941:Guideline for module design qualification and type approval

ISO9001:Quality Management System

ISO14001:Environment Management System

ISO45001:Occupational Health and Safety


TÜVRheinland CERTIFIED | TÜV SÜD | CE | TIER 1 Bloomberg NEW ENERGY FINANCE




# Hi-MO X10 Scientist

# LR7-72HVH 640~670M

| 24.80% | 1% | 0.35% | -0.26%/°C |
|---|---|---|---|
| MAX MODULE EFFICIENCY | FIRST YEAR POWER DEGRADATION | YEAR 2-30 POWER DEGRADATION | BETTER TEMPERATUR COEFFICIENT |

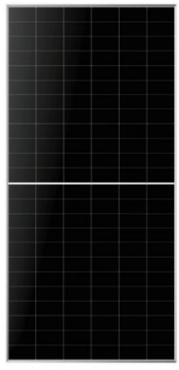



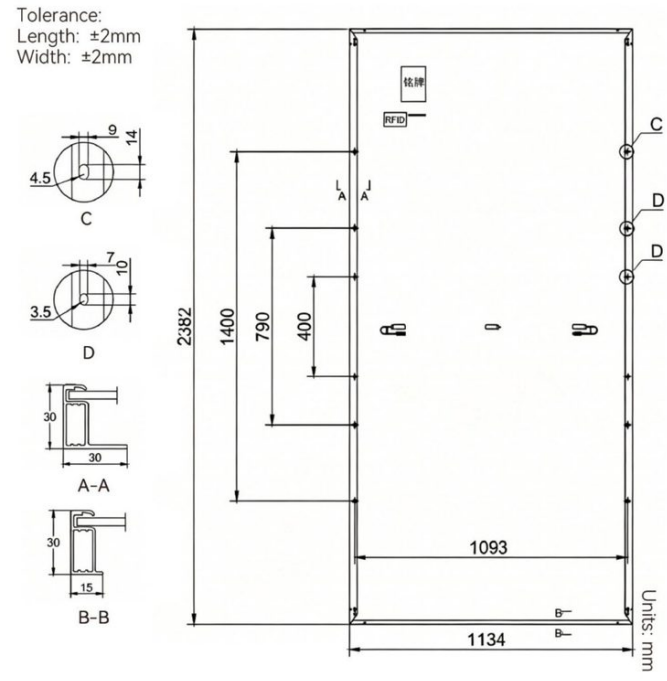


## Mechanical Parameters

| | |
|---|---|
| Cell Orientation | 144 (6×24) |
| Junction Box | IP68, three diodes |
| Output Cable | 4mm²;+400/-200mm/±1400mm length can be customized |
| Glass | Single glass, 3.2mm coated tempered glass |
| Frame | Anodized aluminum alloy frame |
| Weight | 28.5 kg |
| Dimension | 2382×1134×30mm |
| Packaging | 36pcs per pallet / 144pcs per 20'GP / 720pcs per 40'HC |

Remark: 17.5m trucks are rated at 30t load. Actual loading quantity is subject to vehicle specs.

## Electrical Characteristics

·STC: Irradiance1000W/m², Cell Temperature 25℃, AM1.5 (Test uncertainty for Pmax: ±3%)

| Module Type | LR7-72HVH-640M | LR7-72HVH-645M | LR7-72HVH-650M | LR7-72HVH-655M | LR7-72HVH-660M | LR7-72HVH-665M | LR7-72HVH-670M |
|---|---|---|---|---|---|---|---|
| Testing Condition | STC | STC | STC | STC | STC | STC | STC |
| Maximum Power (Pmax/W) | 640 | 645 | 650 | 655 | 660 | 665 | 670 |
| Open Circuit Voltage (Voc/V) | 53.70 | 53.80 | 53.90 | 54.00 | 54.10 | 54.20 | 54.30 |
| Short Circuit Current (Isc/A) | 15.13 | 15.21 | 15.29 | 15.37 | 15.45 | 15.52 | 15.60 |
| Voltage at Maximum Power (Vmp/V) | 44.36 | 44.46 | 44.56 | 44.66 | 44.76 | 44.86 | 44.96 |
| Current at Maximum Power (Imp/A) | 14.43 | 14.51 | 14.59 | 14.67 | 14.75 | 14.83 | 14.91 |
| Module Efficiency (%) | 23.69 | 23.88 | 24.06 | 24.25 | 24.43 | 24.62 | 24.80 |

## Operating Parameters

| | |
|---|---|
| Module [T98] Max | 70℃ |
| Operational Temperature | -40℃ ~ +85℃ |
| Power Output Tolerance | 0~3% |
| Maximum System Voltage | DC1500V (IEC) |
| Maximum Series Fuse Rating | 25A |
| Nominal Operating Cell Temperature | 45±2℃ |
| Protection Class | Class II |
| Fire Rating | IEC Class C |

## Mechanical Loading

| | |
|---|---|
| Min Designed Mechanical Load | 1600Pa/1600Pa |
| Front Side Maximum Static Loading | 5400Pa |
| Rear Side Maximum Static Loading | 2400Pa |
| Hailstone Test | 25mm Hailstone at the speed of 23m/s |

## Temperature Ratings (STC)

| | |
|---|---|
| Temperature Coefficient of Isc | +0.050%/℃ |
| Temperature Coefficient of Voc | -0.200%/℃ |
| Temperature Coefficient of Pmax | -0.260%/℃ |

LONGi SOLAR