

Tools

 Pinout

- System view

 $A > 7$

U

—


3

☐ One Pulse Mode

⦿ User Constants

Sub Priority

0

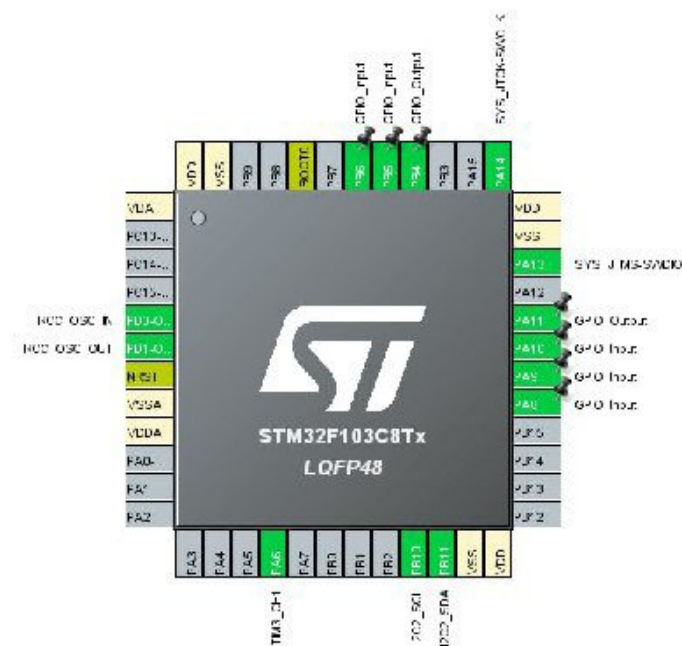



Pinout & Configuration

Clock Configuration

Project Manager

Tools

Software Packs

Pinout

Search

Categories A-Z

System Core

- DMA
- GPIO
- IWDG
- NVIC
- ⚠ I2C
- ⚠ SYS
- WWDG

Analog

Timers

Connectivity

- CAN
- ⚠ I2C1
- ✓ I2C2
- ⚠ SPI1
- SPI2
- ⊗ USART1
- USART2
- ⊗ USART3
- ⊗ USB

Computing

I2C2 Mode and Configuration

Mode

I2C I2C

Configuration

Reset Configuration

NVIC Settings DMA Settings GPIO Settings

Parameter Settings User Constants

Configure the below parameters:

Search (Ctrl+F)

Master Features

- I2C Speed Mode Standard Mode
- I2C Clock Speed (Hz) 100000

Slave Features

- Clock No Stretch Mode Disabled
- Primary Address Length selection 7 bit
- Dual Address Acknowledged Disabled

Pinout view System view

STM32F103C8Tx LQFP48

Pinout diagram showing the chip and its connections.