

# COPPER GROUNDING / NEUTRAL BARS – GB174

c UL us LISTED




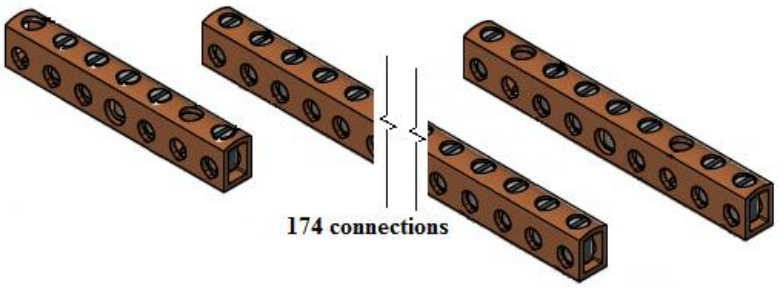


## Standard cross section for the bars :

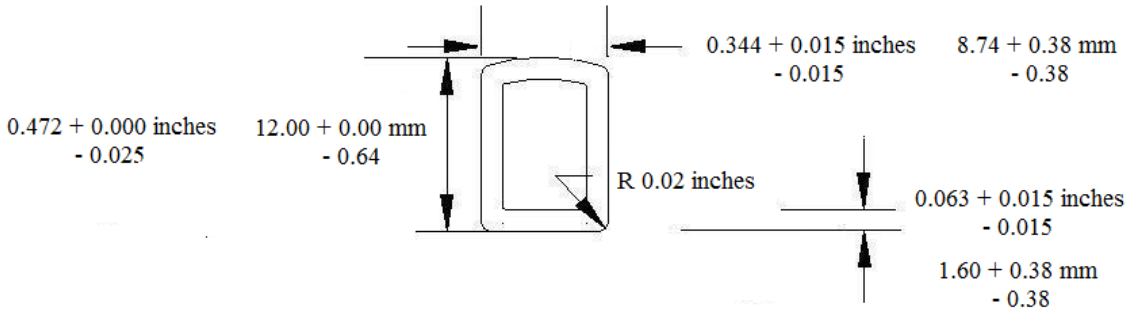


## TOP VIEW of the bars

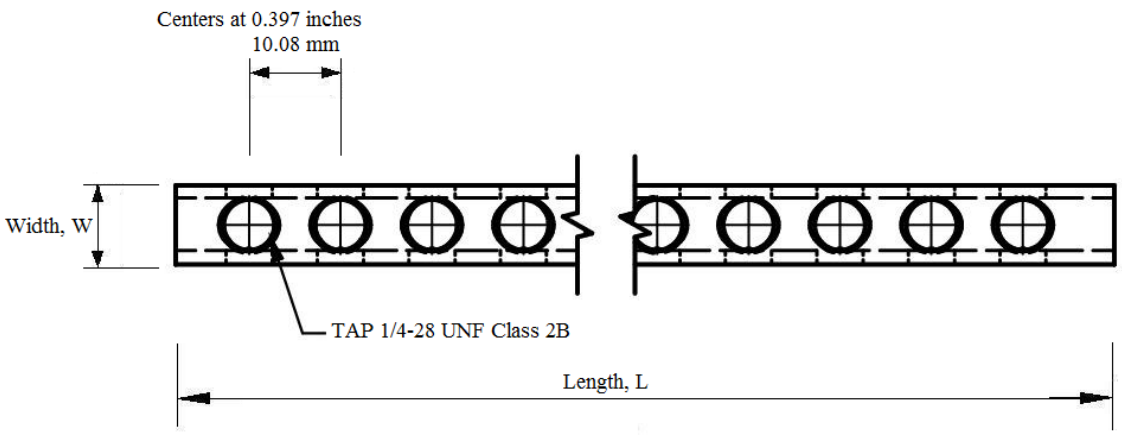

# COPPER GROUNDING BARS

## Features:

*Easy Installing*
*Screw fitted to make instant connections*
*Suitable for copper conductors*
*Suitable for upto 2000 volts*

| Part No | Conductor Size | Mains Conductor Size | Length L | Width W | 1/4-28UNF Screws provided at positions | Mounting Hole positions | Mounting Hole Diameter |
|---|---|---|---|---|---|---|---|
| GB4 | 6-14 AWG | 4-14 AWG | 2.75 | 0.345 | 2,3,4,5,7 | 1, 6 | 0.203 |
| GB6 | 6-14 AWG | 4-14 AWG | 3.5 | 0.345 | 1,3,4,5,6,8,9 | 2,7 | 0.203 |
| GB8 | 6-14 AWG | 4-14 AWG | 4.44 | 0.345 | 1,2,3,5,6,7,8,10,11 | 4,9 | 0.203 |
| GB10 | 6-14 AWG | 4-14 AWG | 5.13 | 0.345 | 1,2,3,5,6,7,8,10,11,12,13 | 4,9 | 0.203 |
| GB12 | 6-14 AWG | 4-14 AWG | 5.95 | 0.345 | 1,2,3,4,6,7,8,9,11,12,13,14,15 | 5,10 | 0.203 |
| GB14 | 6-14 AWG | 4-14 AWG | 6.72 | 0.345 | 1,2,3,4,5,6,8,9,10,12,13,14,15,16,17 | 7,11 | 0.203 |

## Features of *GB174*:

*Cost effective and easy to install*
*174 connections possible*
*Screw fitted to make instant connections*
*Suitable for copper conductors*
*Suitable for upto 600 volts*

| Part No | Conductor Size | Length L | Width W | 1/4-28UNF Screws provided at positions |
|---|---|---|---|---|
| GB174 | 6-14 AWG | 69 | 0.345 | 1,2,3,…,174 |

13, Shah Industrial Estate, Deonar, Chembur, Mumbai 400088, India
Tel : +91 22 2555 5888 email : mail@akcelport.com Web : www.akcelport.com