EARTHING AND LIGHTNING





Copper Bonded Earth Rods

These earth rods conform to BS 4360 grade 43A. They are manufactured from drawn high tensile low carbon steel with a deposition of 99.9% pure electrolytic copper. Electrolytic deposition ensures perfect molecular bonding between the two metals. Thickness of copper layer is generally upto 250 microns. The threads are formed by roll threading process which ensure strength and maintain the molecularly bonded copper along the full length of the threads.


Solid Copper Earth Rods

Externally Threaded

These solid pure copper earth rods are made from drawing high conductivity copper and are ideal for use in extreme soil conditions - where there is high salt or moisture content. These rods are highly resistant to corrosion, thus also ensuring longer life. Threads are formed by roll threading process.

Internally Threaded

These solid pure copper earth rods are made from drawing high conductivity copper.

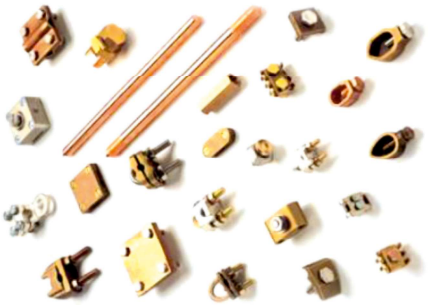

Code No.	Rod Dia mm	Total Length mm	Thread Dia inch
ERCS11200U	9.5	1200	UNTHREADED
ERCS21200	12.7	1200	9/16”
ERCS21500	12.7	1500	9/16”
ERCS21800	12.7	1800	9/16”
ERCS22400	12.7	2400	9/16”
ERCS23000	12.7	3000	9/16”
ERCS31200	14.2	1200	5/8”
ERCS31500	14.2	1500	5/8”
ERCS31500	14.2	1800	5/8”
ERCS32400	14.2	2400	5/8”
ERCS33000	14.2	3000	5/8”
ERCS41200	17.2	1200	3/4”
ERCS41500	17.2	1500	3/4”
ERCS41800	17.2	1800	3/4”
ERCS42400	17.2	2400	3/4”
ERCS43000	17.2	3000	3/4”
ERCS52400U	25	2400	UNTHREADED
ERCS53000U	25	3000	UNTHREADED

Code No.	Rod Dia mm	Total Length mm	Thread Dia inch
ERCE11200U	9.5	1200	UNTHREADED
ERCE21200	12.7	1200	9/16”
ERCE21500	12.7	1500	9/16”
ERCE21800	12.7	1800	9/16”
ERCE22400	12.7	2400	9/16”
ERCE23000	12.7	3000	9/16”
ERCE31200	14.2	1200	5/8”
ERCE31500	14.2	1500	5/8”
ERCE31800	14.2	1800	5/8”
ERCE32400	14.2	2400	5/8”
ERCE33000	14.2	3000	5/8”
ERCE41200	17.2	1200	3/4”
ERCE41500	17.2	1500	3/4”
ERCE41800	17.2	1800	3/4”
ERCE42400	17.2	2400	3/4”
ERCE43000	17.2	3000	3/4”

Code No.	Rod Dia mm	Total Length mm	Thread Dia inch
ERCI11200	14	1200	M10
ERCI11500	14	1500	M10
ERCI21200	15	1200	M10
ERCI21500	15	1500	M10
ERCI31200	16	1200	M10
ERCI31500	16	1500	M10
ERCI41200	20	1200	M12
ERCI41500	20	1500	M12

Hot Dip Galvanized Steel Earth Rods

As a cost effective option for earthing, Hot Dip Galvanized Steel Earth Rods which are made of high strength low carbon steel. These are hot dip galvanized to BS 729



CODE NO	ROD DIA MM	TOTAL LENGTH	THREAD DIA
HD-12-1.2	12	1200	Unthreaded
HD-12-1.5	12	1500	Unthreaded
HD-12-1.8	12	1800	Unthreaded
HD-12-2.4	12	2400	Unthreaded
HD-12-3.0	12	3000	Unthreaded
HD-14-1.2	14	1200	Unthreaded
HD-14-1.5	14	1500	Unthreaded
HD-14-1.8	14	1800	Unthreaded
HD-14-2.4	14	2400	Unthreaded
HD-14-3.0	14	3000	Unthreaded
HD-16-1.2	16	1200	Unthreaded
HD-16-1.5	16	1500	Unthreaded
HD-16-1.8	16	1800	Unthreaded
HD-16-2.4	16	2400	Unthreaded
HD-16-3.0	16	3000	Unthreaded
HD-20-1.2	20	1200	Unthreaded
HD-20-1.5	20	1500	Unthreaded
HD-20-1.8	20	1800	Unthreaded
HD-20-2.4	20	2400	Unthreaded
HD-20-3.0	20	3000	Unthreaded

Driving Bolt

The driving head screws into the coupling to allow deep driving of the earth rods and protect the threads.

Material : High Tensile Steel



Item Code	Thread Dia (mm)	Rod Diameter
DB16	5/8" or 16 mm	14.2 mm
DB20	3/4" or 20 mm	17.2 mm

Couplers

Features of Threaded Couplings:

- Used for joining copper bonded threaded earth rods together
- Manufactured from a high copper content alloy, ensuring excellent corrosion resistance
- Protect threads during installation
- Ensure continual contact between the rods, during and after installation
- Facilitate deep driving
- Available in hexagonal and round designs

Material : Gunmetal, Brass, Aluminum Bronze.



Item Code	Thread Dia	Length (mm)
CP14	1/2"	70
CP16	5/8"	70
CP20	1/4"	80

Driving Spike

The steel spike enables the rod to be driven easily and stops the copper rod get damaged.

Material : High Tensile Steel and Stainless Steel



Item Code	Thread Dia (mm)	Rod Diameter
DS08	M8	9/16"
DS10	M10	5/8"
DS12	M12	3/4"



Air Terminal Rod Assembly

Air Terminal Multiple Point

Material : Copper, Brass Base with Copper Spikes, Gunmetal

Item Code	Thread Dia
ATMP16	5/8" or 16mm
ATMP20	3/4" or 20mm



Driving Head

The driving head protects the thread and the top of the rod from damage when driving.

Material : High Tensile Steel



Item Code	Thread Dia (mm)	Rod Diameter
DH08	M8	9/16"
DH10	M10	5/8"
DH12	M12	3/4"




Air Terminal Base

Material : Brass, Gunmetal



Item Code	Thread Dia	Max Conductor Tape
ATB16	5/8" or 16mm	30 x 6 mm
ATB20	3/4" or 20mm	30 x 6 mm

Taper Pointed Air Rods



Material : Copper, Copper Alloy

Item Code	Thread Dia	Length (mm)
ATR16-500	5/8" or 16mm	500
ATR16-1000	5/8" or 16mm	1000
ATR16-1500	5/8" or 16mm	1500
ATR16-2000	5/8" or 16mm	2000
ATR20-500	3/4" or 20mm	500
ATR20-1000	3/4" or 20mm	1000
ATR20-1500	3/4" or 20mm	1500
ATR20-2000	3/4" or 20mm	2000

Flat Saddle (Type C)



Material : Gunmetal

Item Code	Conductor Size	Rod Dia	Thread Dia
FSC5070	50-70 mm	15 mm	16 mm
FSC95	95 mm	15 mm	16 mm

Rigid Saddle



Material : Gunmetal

Item Code	Rod Dia	Thread Dia	Max Tape Size
RS16	15 mm	M16	30 x 6 mm
RS58	14.2 mm	5/8"	30 x 6 mm
RS34	17.2 mm	3/4"	30 x 6 mm

Air Rod to Tape / Cable Coupling

Rod to Tape Coupling

Item Code	Rod Dia	Thread Dia	Conductor / Tape
RTC1625	15 mm	M16	25 x 3 mm
RTC5825	14.2 mm	5/8"	25 x 3 mm
RTC3425	17.2 mm	3/4"	25 x 3 mm



Rod to Cable Coupling

Item Code	Rod Dia	Thread Dia	Conductor / Tape
RCC1670	15 mm	M16	50-70 mm^2
RCC1695	15 mm	M16	95 mm^2
RCC5870	14.2 mm	5/8"	50-70 mm^2
RCC5895	14.2 mm	5/8"	95 mm^2
RCC3470	17.2 mm	3/4"	50-70 mm^2
RCC3495	17.2 mm	3/4"	95 mm^2

Rod Brackets

Side Mounting / Open Type


Material : Gunmetal, Brass.

Item Code	Rod Dia (mm)
RB16	16
RB20	20



DC Tape Clip

Material : Body made up of gunmetal and screws are of Naval Brass.



Item Code	Conductor Size
DCTC203	20 x 3 mm
DCTC253	25 x 3 mm
DCTC256	25 x 6 mm
DCTC303	30 x 3 mm
DCTC306	30 x 6 mm
DCTC313	31 x 3 mm

Item Code	Conductor Size
DCTC316	31 x 6 mm
DCTC383	38 x 3 mm
DCTC386	38 x 6 mm
DCTC406	40 x 6 mm
DCTC503	50 x 3 mm
DCTC506	50 x 6 mm

Other sizes available on request

Bare Tape Clip With / Without Base Plate

Material : Copper / Brass

Item Code	Conductor Size
TC203	20 x 3 mm
TC253	25 x 3 mm
TC383	38 x 3 mm

Other sizes available on request



One Hole Clip

Material : Copper / Brass



Item Code	Conductor Size
HC25	25-70
HC95	95-120
HC150	150-185
HC240	240-300

Other sizes available on request

Square Tape Clamps



Material : Brass / Gunmetal

Item Code	Conductor Size
STC253	25 x 3 mm
STC256	25 x 6 mm
STC313	31 x 3 mm

Item Code	Conductor Size
STC386	38 x 6 mm
STC503	50 x 3 mm
STC506	50 x 6 mm

Other sizes available on request.

Plate Test Clamp




Material : Brass / Gunmetal

Item Code	Conductor Size
PTC253	25 x 3 mm
PTC506	50 x 6 mm

Other sizes available on request

Oblong Test Clamp



Material : Brass / Gunmetal

Item Code	Conductor Size
OTC268	26 x 8 mm
OTC5110	51 x 10 mm

Other sizes available on request

Tower Earth Clamp Single Plate



Material : Brass / Gunmetal

Item Code	Channel Thickness	Conductor Size	Bolt Size
TECS16	10 mm	16-70 Sq.mm	M10
TECS70	10 mm	70-120 Sq.mm	M12

Tower Earth Clamp Double Plate

Material : Brass / Gunmetal

Item Code	Conductor Size
TEC16	16-70 sq.mm
TEC70	70-120 sq.mm
TEC120	120-185 sq.mm
TEC185	185-240 sq.mm
TEC240	240-300 sq.mm



Other sizes available on request

U Bolt Rod Clamps - Type E

Material : Brass / Gunmetal

Code No.	Rod Dia. mm	Conductor Range mm²
UE9.5	9.5	6-35
UE14	14.0	16-70
UE16	16.0	16-95
UE20	20.0	70-120
UE25	25.0	70-185



Rod to Cable Lug Clamps 'B'

Material : Brass / Gunmetal

Code No.	Rod Size
UB-9.5	9.5
UB14	14.0
UB16	16.0
UB20	20.0
UB25	25.0



Rod to Cable Clamps - Type GUV

Material : Brass / Gunmetal

CODE NO.	ROD DIA MM	CONDUCTOR RANGE MM²
GUV9.5	9.5	6-35
GUV14	14.0	16-70
GUV 16	16.0	16-95
GUV20	20.0	70-120
GUV25	25.0	70-185



U Bolt for Rigid Pipe & Cable - Type PUB

Material : Brass / Gunmetal

CODE NO.	ROD DIA MM	CONDUCTOR RANGE MM²
PUB9.5	9.5	6-35
PUB14	14.0	16-70
PUB16	16.0	16-95
PUB20	20.0	70-120
PUB25	25.0	70-185



Rod to Cable Clamps - Type KUV

Material : Brass / Gunmetal

CODE NO.	ROD DIA MM	CONDUCTOR RANGE MM²
KUV9.5	9.5	6-35
KUV14	14.0	16-70
KUV16	16.0	16-95
KUV20	20.0	70-120
KUV25	25.0	70-185



Rod to Cable Clamps - Type SCE

Material : Brass / Gunmetal

CODE NO.	ROD DIA MM	CONDUCTOR RANGE MM²
SCE9.5	9.5	6-35
SCE14	14.0	16-70
SCE16	16.0	16-95
SCE20	20.0	70-120
SCE25	25.0	70-185



Re-Bar Clamp

Material : Brass / Gunmetal

CODE NO.	CONDUCTOR DIA	PIPE DIA
RCP18	8 mm	8-18 mm
RCP38	8 mm	8-38 mm



Rod to Cable Clamps - Type A

Material : Brass / Gunmetal

CODE NO.	ROD DIA MM	Screws (mm)
CPA9.5	9.5	M10x25
CPA14	14.0	M10x25
CPA16	16.0	M10x25
CPA20	20.0	M10x50
CPA25	25.0	M10x50



Clamping Two Cables to Flat Bar

Material : Brass / Gunmetal

CODE NO.	CONDUCTOR RANGE MM²
CFB25	25-50
CFB70	70-120
CFB150	150-240



Rod to Cable Clamps - Type O

Material : Brass / Gunmetal

CODE NO.	ROD DIA MM	CONDUCTOR RANGE MM²
CPO14.2	14.2	06-16
CPO14.2	14.2	16-70
CPO17.2	17.2	16-95



Cable to Square Joint

Material : Brass / Gunmetal

CODE NO.	CONDUCTOR RANGE MM²
CSJ50	50
CSJ70	70
CSJ95	95



Rod to Cable Clamps - Type G

Material : Brass / Gunmetal

CODE	ROD DIA MM	CONDOCTOR RANGE MM²
CPG 9.5	14.2	06-16
CPG14	14.2	16-70
CPG16	14.2	16-95
CPG20	17.2	16-95
CPG25	17.2	70-185



Cable Tee Clamps

Material : Brass / Gunmetal

CODE NO.	CONDUCTOR RANGE MM²
CTC50	50
CTC70	70
CTC95	95



Split Connector Clamps

Material : Brass / Gunmetal

CODE NO.	ROD DIA MM
SSC 9.5	9.5
SSC 14	14.0
SSC 16	16.0
SSC 20	20.0
SSC 25	25.0

