
FLEX 7 XL
FLEX 25/50


Increase your **added value** with **high flexible** robot cell




Grippers

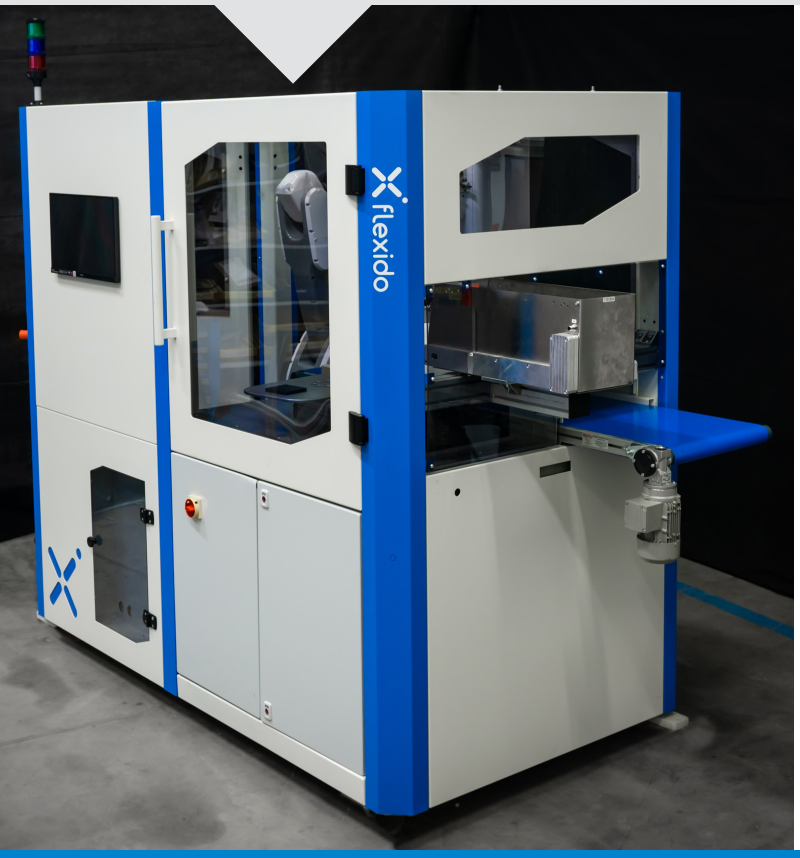


Gripper for insert placing

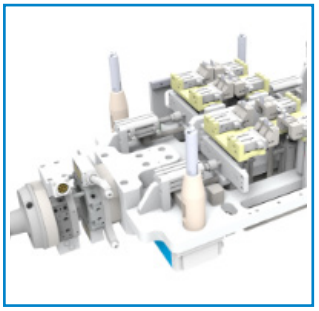

Complex gripper for insert moulding

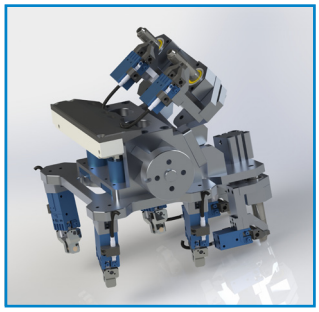


Simple Gripper

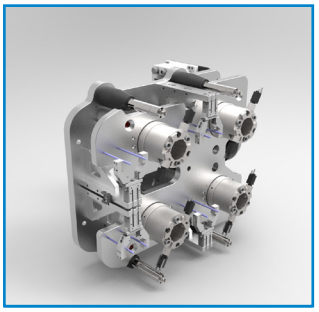

Complex gripper for insert moulding


Mid & High performance applications with minimal footprint




Stator




Stator segment



Rotor



Connector



Venting Flape



Gear

Applications


- Insert placing & Insert moulding
- Before IM process application (insert laser cleaning)
- After IM process application (laser engraving)
- Quality control

Technical data	FLEX 7XL	FLEX 25	FLEX 50
Dimension L x B:	2160 X 1120 mm	2500 x 2360 + safety fance	
Robot:	MZ 10 LF / MZ 12	MZ25	MZ50F
Payload:	10 / 12 kg	25 kg	50 kg
Reach:	1202 / 1404 mm	1882 mm	2102 mm
	Integrated conveyor belt		
	Interface for E67, E78, E73		


flexido
FLEXIDO d.o.o.
Veliki Otok 44 d
SI-6230 Postojna
info@flexido.eu
www.flexido.eu

OPTIONS

INFEED / OUTFEED System

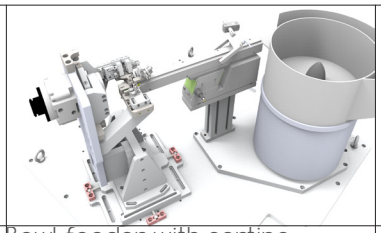


Bowl feeder with sorting unit for inserts feeding

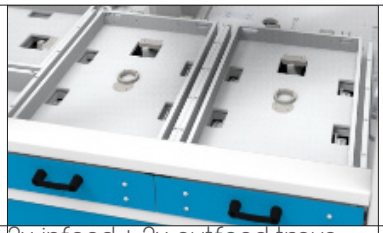


2x infeed + 2x outfeed trays




Large capacity Tray stacker

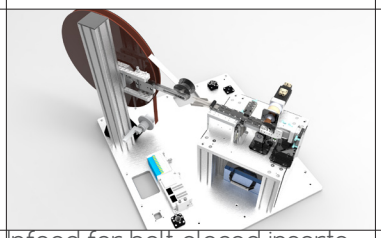

Infeed for belt placed inserts

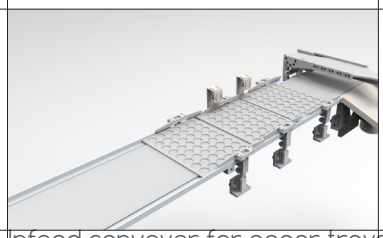


Infeed conveyor for paper trays

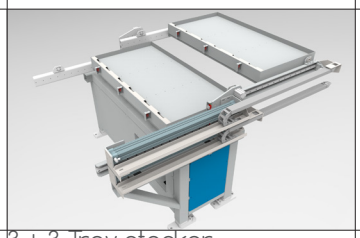


3 + 3 Tray stacker



Vibro plate with 2D vision system

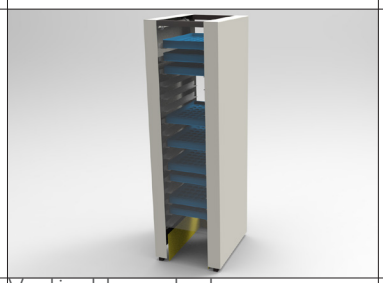

Vertical tray stacker

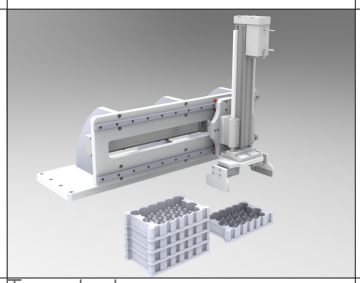


Tray stacker

Other Infeed / Outfeed possibilities




INFEED: Vibratory Bowl Feeder
OUTFEED: Conveyor

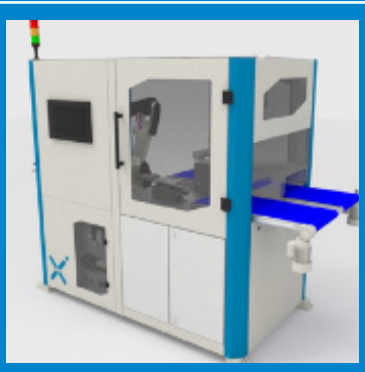

INFEED: Coveyor + 2D camera
OUTFEED: Conveyor




INFEED: Coveyor + 2D camera
OUTFEED: Conveyor

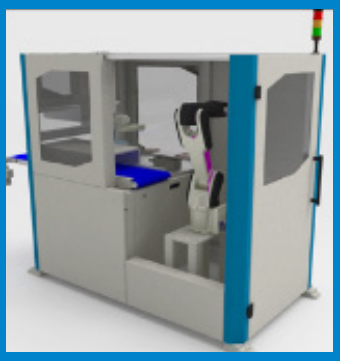


INFEED: Vibrating Feeder Plate
OUTFEED: Conveyor


Options

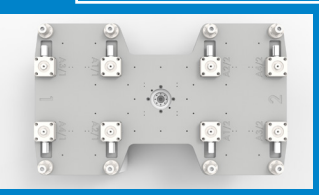


Insert preparation table

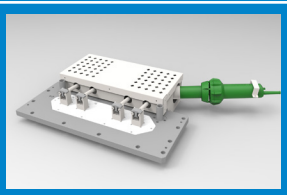


Preheating of insertn with hot air

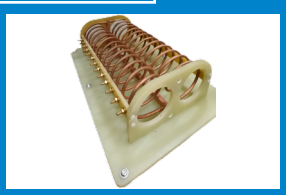

Preheating of insertn with induction

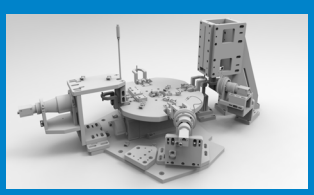

Vision system for quality check

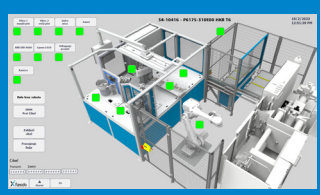

Visualisation - Sensor staturs (via remote control)