01 Bear head
104.36 x 104.36 mm | 2 slits

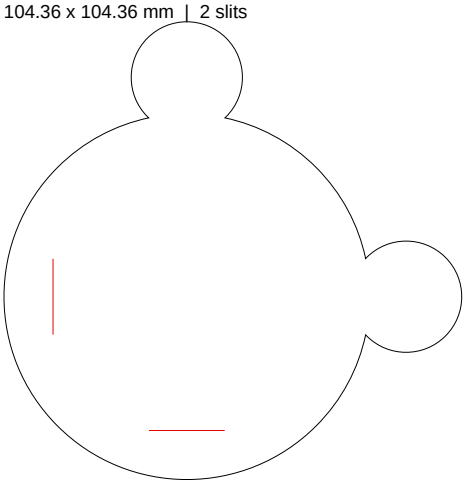

02 Pinwheel 4-lobe
90.00 x 90.00 mm | 4 slits

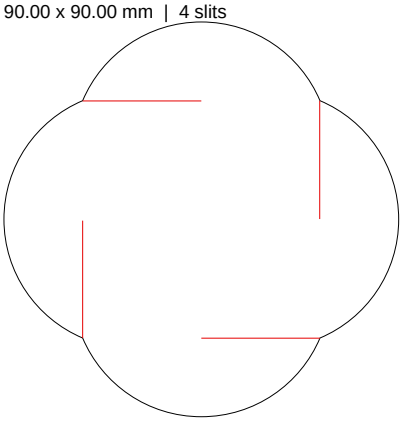

03 Capsule cross
90.01 x 90.00 mm | 6 slits

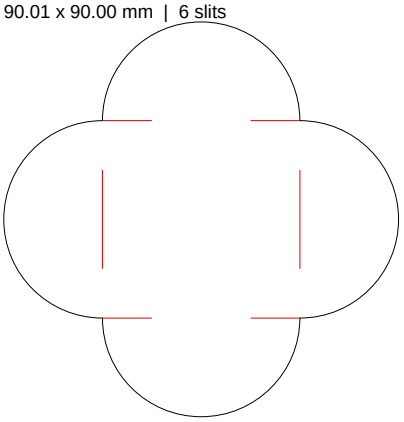

04 Rounded square diagonal
90.00 x 90.00 mm | 6 slits

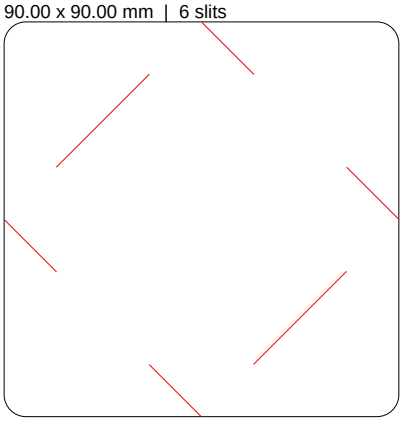

05 Circle
90.00 x 90.00 mm | 6 slits

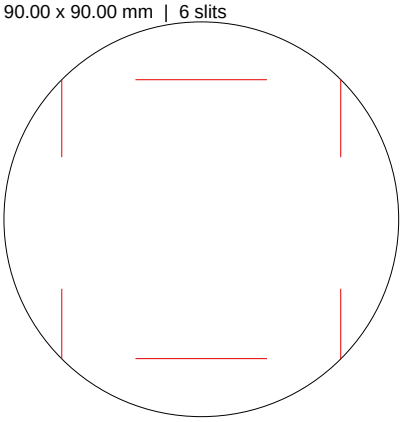

06 Soft cross
90.00 x 90.00 mm | 6 slits

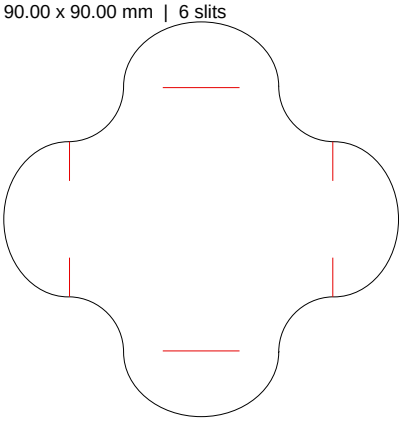

DIE MAKER NOTES

1. All drawings 1:1, mm. Produce from the DXF files (layers CUT / SLIT; true arcs and ellipses). This PDF is the dimensioned reference.
2. Geometry is taken directly from the designer's vector PDF of 2026-10-14 - no re-tracing.
3. CUT (black) = outline, full cut. SLIT (red) = through cut, same rule height as CUT.
4. Slit lines that ran past the outline in the artwork were trimmed back to the outline (amount listed per sheet).
5. A 0.01 mm stray point inside pattern 03 was removed - it is not a cut.
6. Slits ending on the outline join the outline rule cleanly (T-joint), no gap, no overcut.
7. Suggested rule: 2pt centre-bevel, 23.8 mm height (or die maker standard) for leather 1.2-2.0 mm.
8. Optional: dia. 1.5 mm round punch at the closed end of each slit to stop tearing (confirm with designer).

Check print: this bar must measure exactly 50 mm

CUT - outline, full-cut rule
SLIT - through-cut slit / slot
Dimension - not cut

OVERVIEW - REV 20261014 Reduced scale on this sheet only. Sheets 2-7 are 1:1.	SCALE **1 : 1**	DATE: 2026-10-14 SHEET: 1 / 7
Project: Leather no-sew interlocking patterns | REV 20261014 Source: 20261014_pattern-leather-cre.pdf (vector, exact geometry) Material: leather 1.2-2.0 mm | Process: steel-rule / clicker die	UNITS: mm TOL: +/-0.2 mm PAPER: A4 (print 100%)	DRAWN: Claude Code CHECKED: _____ APPROVED: _____

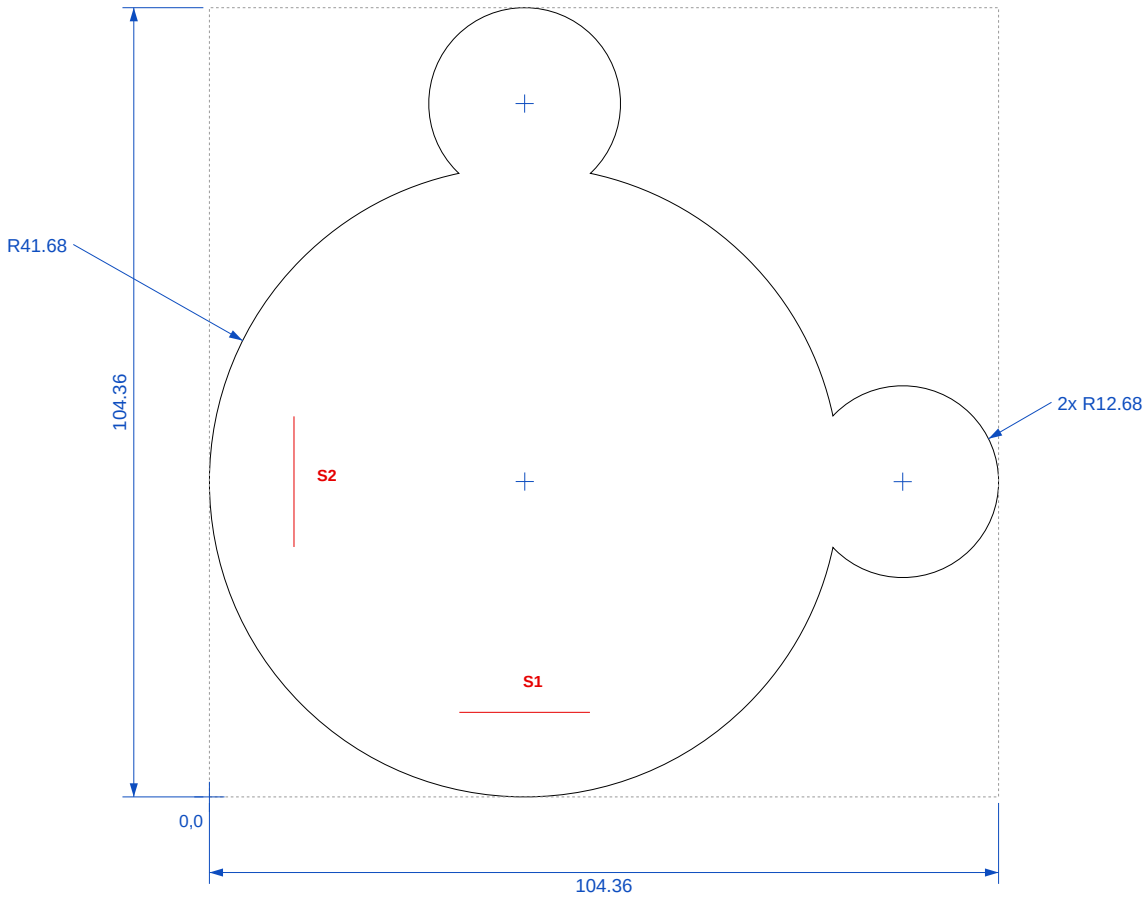

GEOMETRY (from designer vector file)

- R41.68 centre: (41.70, 41.70)
- R12.68 centres: (91.68, 41.69), (41.69, 91.68)

SLIT COORDINATES (origin = bottom-left 0,0)

S1: (33.05, 11.18) -> (50.32, 11.18) L = 17.27
S2: (11.18, 50.32) -> (11.18, 33.05) L = 17.27

CHECK BEFORE CUTTING STEEL

- Bear rotated 45 deg vs 20261013: ears now at top and right; slits now vertical (left) and horizontal (bottom).

CUT - outline, full-cut rule
SLIT - through-cut slit / slot
Dimension - not cut

Check print: this bar must measure exactly 50 mm

PATTERN 01 - BEAR HEAD Overall 104.36 x 104.36 mm | 1 cut outline + 2 slits | REV 20261014	SCALE **1 : 1**	DATE: 2026-10-14 SHEET: 2 / 7
Project: Leather no-sew interlocking patterns | REV 20261014 Source: 20261014_pattern-leather-cre.pdf (vector, exact geometry) Material: leather 1.2-2.0 mm | Process: steel-rule / clicker die	UNITS: mm TOL: +/-0.2 mm PAPER: A4 (print 100%)	DRAWN: Claude Code CHECKED: _____ APPROVED: _____

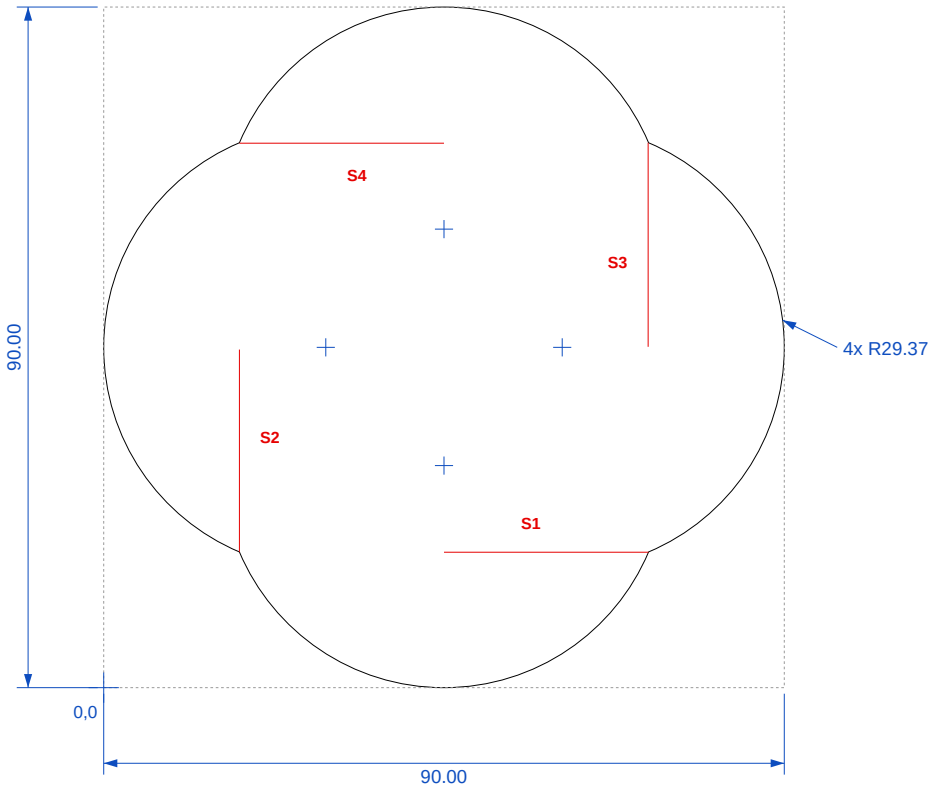

GEOMETRY (from designer vector file)

- R29.37 centres: (29.37, 45.00), (60.63, 45.00), (45.00, 60.63), (45.00, 29.37)

SLIT COORDINATES (origin = bottom-left 0,0)

S1: (72.04, 17.91) -> (45.00, 17.91) L = 27.04
S2: (17.95, 17.95) -> (17.95, 44.71) L = 26.76
S3: (72.00, 45.07) -> (72.00, 72.05) L = 26.98
S4: (45.00, 72.00) -> (17.95, 72.00) L = 27.05

CHECK BEFORE CUTTING STEEL

- Slots now 27.0 = exactly half of the 54.1 fold edge (were 29.25).
- Woven petal-box joint needs the two slots to overlap: keep >= 28.5 if that product is used.

CUT - outline, full-cut rule
SLIT - through-cut slit / slot
Dimension - not cut

Check print: this bar must measure exactly 50 mm

PATTERN 02 - PINWHEEL 4-LOBE Overall 90.00 x 90.00 mm | 1 cut outline + 4 slits | REV 20261014	SCALE **1 : 1**	DATE: 2026-10-14 SHEET: 3 / 7
Project: Leather no-sew interlocking patterns | REV 20261014 Source: 20261014_pattern-leather-cre.pdf (vector, exact geometry) Material: leather 1.2-2.0 mm | Process: steel-rule / clicker die	UNITS: mm TOL: +/-0.2 mm PAPER: A4 (print 100%)	DRAWN: Claude Code CHECKED: _____ APPROVED: _____

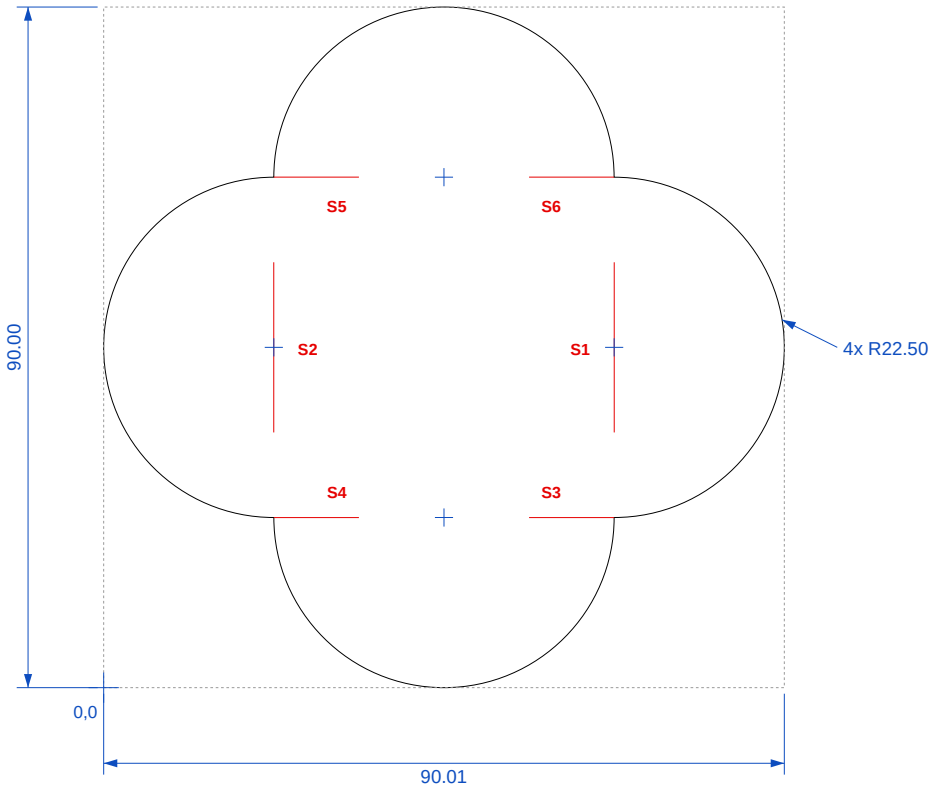

GEOMETRY (from designer vector file)

- R22.50 centres: (67.51, 45.00), (45.00, 67.50), (45.00, 22.50), (22.50, 45.00)

SLIT COORDINATES (origin = bottom-left 0,0)

S1: (67.52, 56.25) -> (67.52, 33.75) L = 22.50
S2: (22.49, 56.25) -> (22.49, 33.75) L = 22.50
S3: (67.50, 22.49) -> (56.25, 22.49) L = 11.25 (trimmed 5.26 outside outline)
S4: (33.75, 22.49) -> (22.50, 22.49) L = 11.25 (trimmed 5.25 outside outline)
S5: (33.75, 67.51) -> (22.50, 67.51) L = 11.25 (trimmed 5.24 outside outline)
S6: (67.50, 67.51) -> (56.25, 67.51) L = 11.25 (trimmed 5.26 outside outline)

CHECK BEFORE CUTTING STEEL

- Tab neck (45 - 2 x 11.25 = 22.5) equals receiving slit 22.5: zero clearance.
- Suggest slit 23.5 or slots 11.75 for ~1 mm clearance in 1.5 mm leather.

CUT - outline, full-cut rule
SLIT - through-cut slit / slot
Dimension - not cut

Check print: this bar must measure exactly 50 mm

PATTERN 03 - CAPSULE CROSS Overall 90.01 x 90.00 mm | 1 cut outline + 6 slits | REV 20261014	SCALE **1 : 1**	DATE: 2026-10-14 SHEET: 4 / 7
Project: Leather no-sew interlocking patterns | REV 20261014 Source: 20261014_pattern-leather-cre.pdf (vector, exact geometry) Material: leather 1.2-2.0 mm | Process: steel-rule / clicker die	UNITS: mm TOL: +/-0.2 mm PAPER: A4 (print 100%)	DRAWN: Claude Code CHECKED: _____ APPROVED: _____

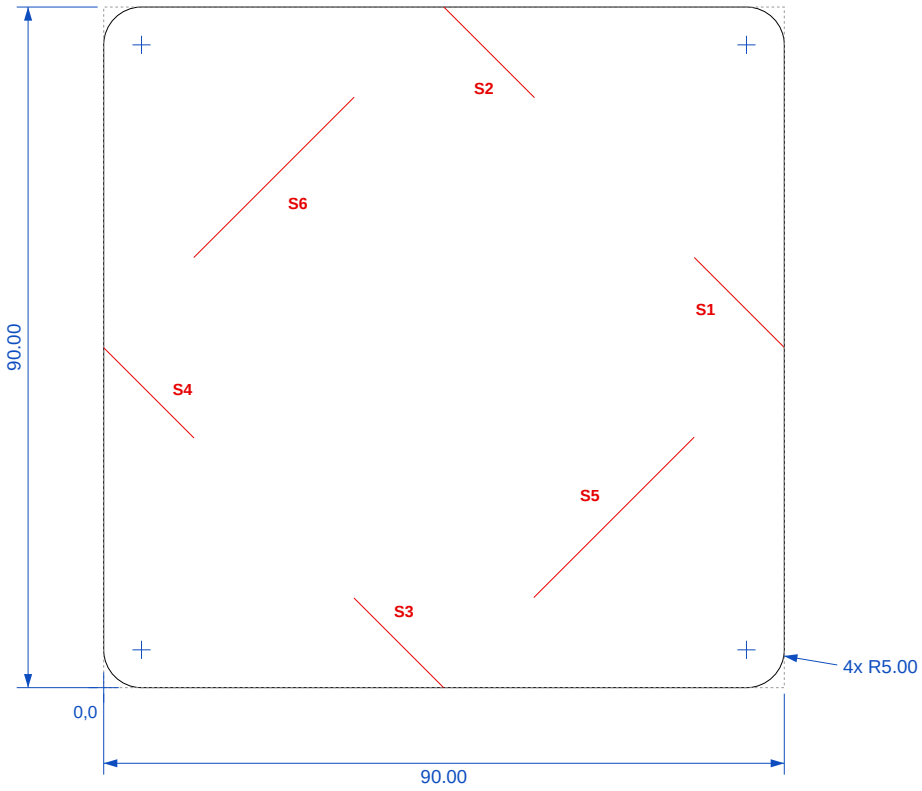

GEOMETRY (from designer vector file)

- R5.00 centres: (85.00, 85.00), (85.00, 5.00), (5.00, 85.00), (5.00, 5.00)

SLIT COORDINATES (origin = bottom-left 0,0)

S1: (78.10, 56.88) -> (90.00, 44.98) L = 16.83 (trimmed 1.69 outside outline)
S2: (44.98, 90.00) -> (56.96, 78.02) L = 16.94 (trimmed 4.49 outside outline)
S3: (33.09, 11.87) -> (44.95, -0.00) L = 16.78 (trimmed 1.74 outside outline)
S4: (-0.00, 44.95) -> (11.95, 33.01) L = 16.90 (trimmed 4.54 outside outline)
S5: (78.09, 33.12) -> (56.88, 11.91) L = 30.00
S6: (33.12, 78.09) -> (11.91, 56.88) L = 30.00

CHECK BEFORE CUTTING STEEL

- Edge slots now 16.8-16.9 (were 15): tab neck ~29.9 vs slit 30.0 - about 0.1 mm clearance.

CUT - outline, full-cut rule
SLIT - through-cut slit / slot
Dimension - not cut

Check print: this bar must measure exactly 50 mm

PATTERN 04 - ROUNDED SQUARE DIAGONAL Overall 90.00 x 90.00 mm | 1 cut outline + 6 slits | REV 20261014	SCALE **1 : 1**	DATE: 2026-10-14 SHEET: 5 / 7
Project: Leather no-sew interlocking patterns | REV 20261014 Source: 20261014_pattern-leather-cre.pdf (vector, exact geometry) Material: leather 1.2-2.0 mm | Process: steel-rule / clicker die	UNITS: mm TOL: +/-0.2 mm PAPER: A4 (print 100%)	DRAWN: Claude Code CHECKED: _____ APPROVED: _____

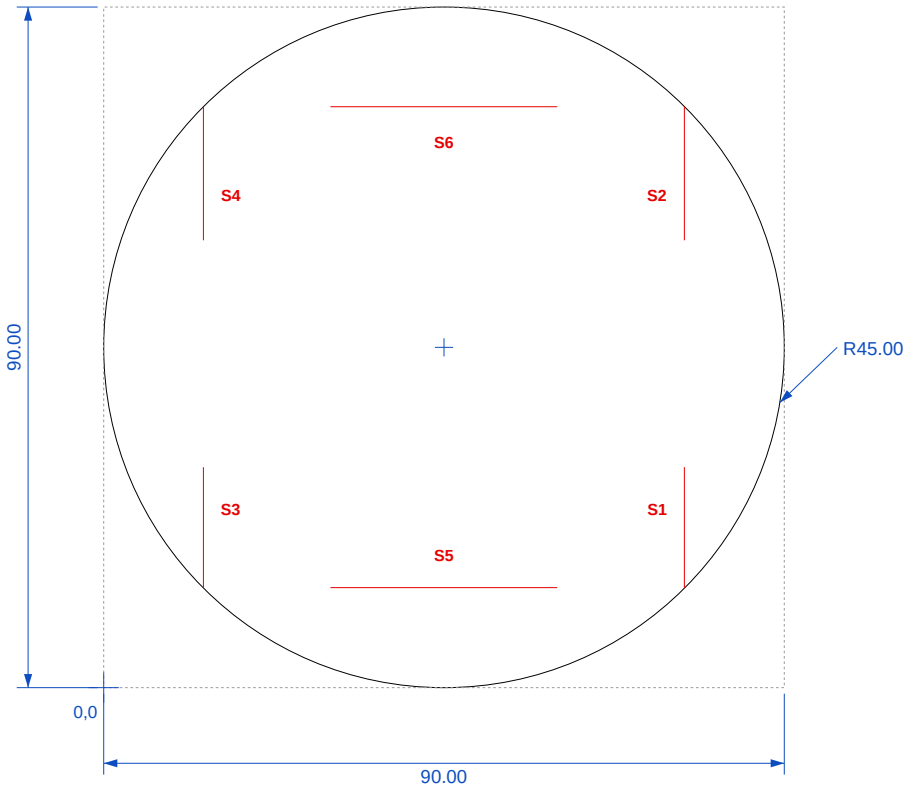

GEOMETRY (from designer vector file)

- R45.00 centre: (45.00, 45.00)

SLIT COORDINATES (origin = bottom-left 0,0)

S1: (76.79, 29.16) -> (76.79, 13.15) L = 16.01 (trimmed 1.29 outside outline)
S2: (76.79, 76.85) -> (76.79, 59.16) L = 17.69 (trimmed 1.09 outside outline)
S3: (13.18, 29.16) -> (13.18, 13.18) L = 15.98 (trimmed 1.32 outside outline)
S4: (13.18, 76.82) -> (13.18, 59.16) L = 17.66 (trimmed 1.12 outside outline)
S5: (59.98, 13.23) -> (29.98, 13.23) L = 30.00
S6: (59.98, 76.82) -> (29.98, 76.82) L = 30.00

CUT - outline, full-cut rule
SLIT - through-cut slit / slot
Dimension - not cut

Check print: this bar must measure exactly 50 mm

CHECK BEFORE CUTTING STEEL

- Slots differ: top pair 17.7, bottom pair 16.0 - intended? Symmetric value for neck = slit is 16.82.
- Tab neck 30.0 equals slit 30.0: zero clearance. Suggest slots 17.3 each (~1 mm clearance).

PATTERN 05 - CIRCLE Overall 90.00 x 90.00 mm | 1 cut outline + 6 slits | REV 20261014	SCALE **1 : 1**	DATE: 2026-10-14 SHEET: 6 / 7
Project: Leather no-sew interlocking patterns | REV 20261014 Source: 20261014_pattern-leather-cre.pdf (vector, exact geometry) Material: leather 1.2-2.0 mm | Process: steel-rule / clicker die	UNITS: mm TOL: +/-0.2 mm PAPER: A4 (print 100%)	DRAWN: Claude Code CHECKED: _____ APPROVED: _____

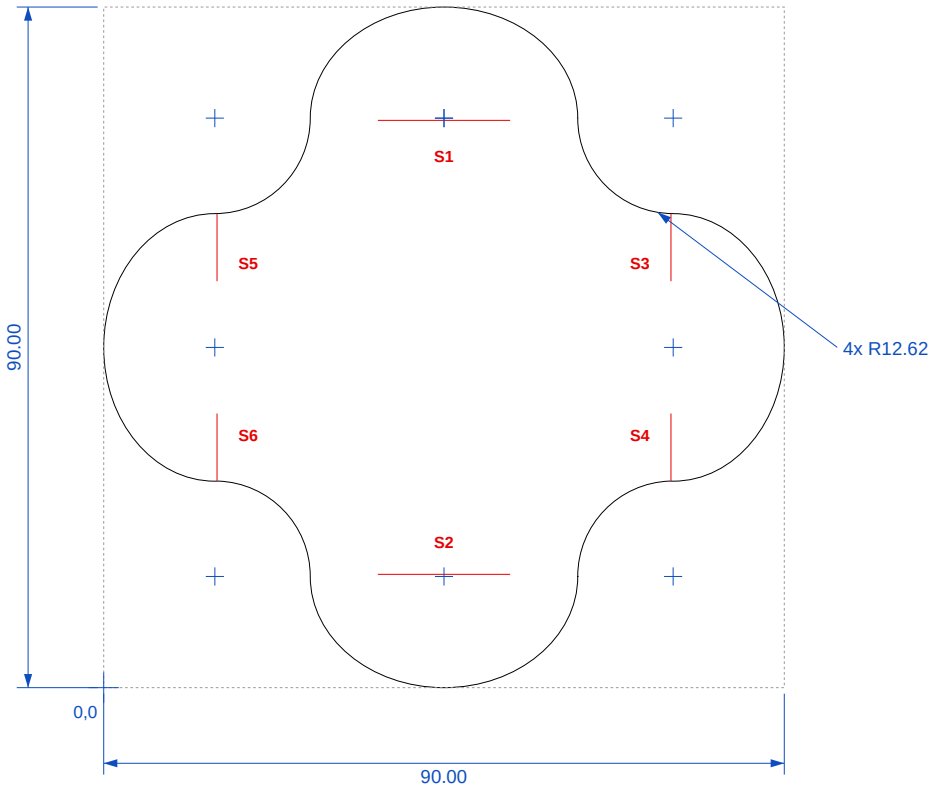

GEOMETRY (from designer vector file)

- R12.62 centres: (75.31, 75.31), (14.69, 75.31), (75.30, 14.70), (14.70, 14.70)
- Ellipse 35.37 x 29.37 centres: (45.00, 75.31)
- Ellipse 35.37 x 29.39 centres: (45.00, 14.70), (45.00, 75.31)
- Ellipse 29.39 x 35.38 centres: (14.69, 44.99)
- Ellipse 29.38 x 35.38 centres: (75.31, 44.99)

CUT - outline, full-cut rule

SLIT - through-cut slit / slot

Dimension - not cut

Check print: this bar must measure exactly 50 mm

SLIT COORDINATES (origin = bottom-left 0,0)

S1: (36.25, 75.02) -> (53.75, 75.02) L = 17.50
S2: (36.25, 14.98) -> (53.75, 14.98) L = 17.50
S3: (75.02, 53.75) -> (75.02, 62.69) L = 8.94 (trimmed 1.07 outside outline)
S4: (75.02, 27.31) -> (75.02, 36.25) L = 8.94 (trimmed 1.08 outside outline)
S5: (14.98, 53.75) -> (14.98, 62.69) L = 8.94 (trimmed 1.07 outside outline)
S6: (14.98, 27.31) -> (14.98, 36.25) L = 8.94 (trimmed 1.08 outside outline)

CHECK BEFORE CUTTING STEEL

- Lobes are now ellipses (DXF uses true ELLIPSE). Tab neck 17.5 equals slit 17.5: zero clearance.
- Lower two concave corners meet the side lobes through a 0.4 mm straight step (upper two meet directly) - reproduced as drawn.

PATTERN 06 - SOFT CROSS Overall 90.00 x 90.00 mm | 1 cut outline + 6 slits | REV 20261014	SCALE **1 : 1**	DATE: 2026-10-14 SHEET: 7 / 7
Project: Leather no-sew interlocking patterns | REV 20261014 Source: 20261014_pattern-leather-cre.pdf (vector, exact geometry) Material: leather 1.2-2.0 mm | Process: steel-rule / clicker die	UNITS: mm TOL: +/-0.2 mm PAPER: A4 (print 100%)	DRAWN: Claude Code CHECKED: _____ APPROVED: _____