

Flight Control Computer (FCC)

STM32H7: see AN4938

Not using LSE as do not need RTC

C13, C14: ESR < 100mOhm

Navigation Computer (NAVC).kicad_sch

Navigation Computer (NAVC)

Connections

File: Connections.kicad_sch

FCC Peripherals

File: FCC Peripherals.kicad_sch

NAVC Peripherals

File: NAVC Peripherals.kicad_sch


power

File: power.kicad_sch







Power symbol creates a global label with name "GND". ground

AN2606 (Bootloaders): USART1 Bootloader (PB14/PB15)

C15, C27, C29 Tantalum



Decoupling Capacitors

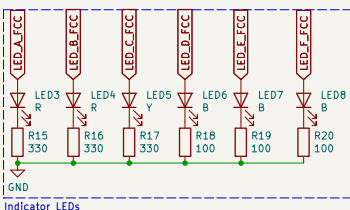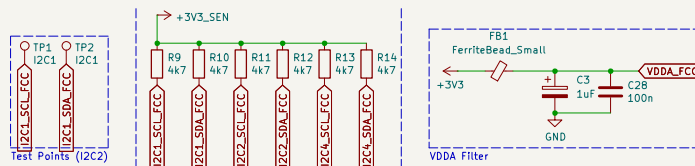

$C32 = C33 = 2 * (CL - C_{stray})$
 $C_{stray} = (2pF, 5pF)$
 $R_{ext} = 1 / (2 * \pi * f * CL2)$

Sheet: /
File: PHANTOM_V2_PLAN_A_FIXXXXXXXXX.kicad_sch

Title:


Size: A4


Date:

Rev:

KiCad E.D.A. 10.0.0-rc2

Id: 1/6

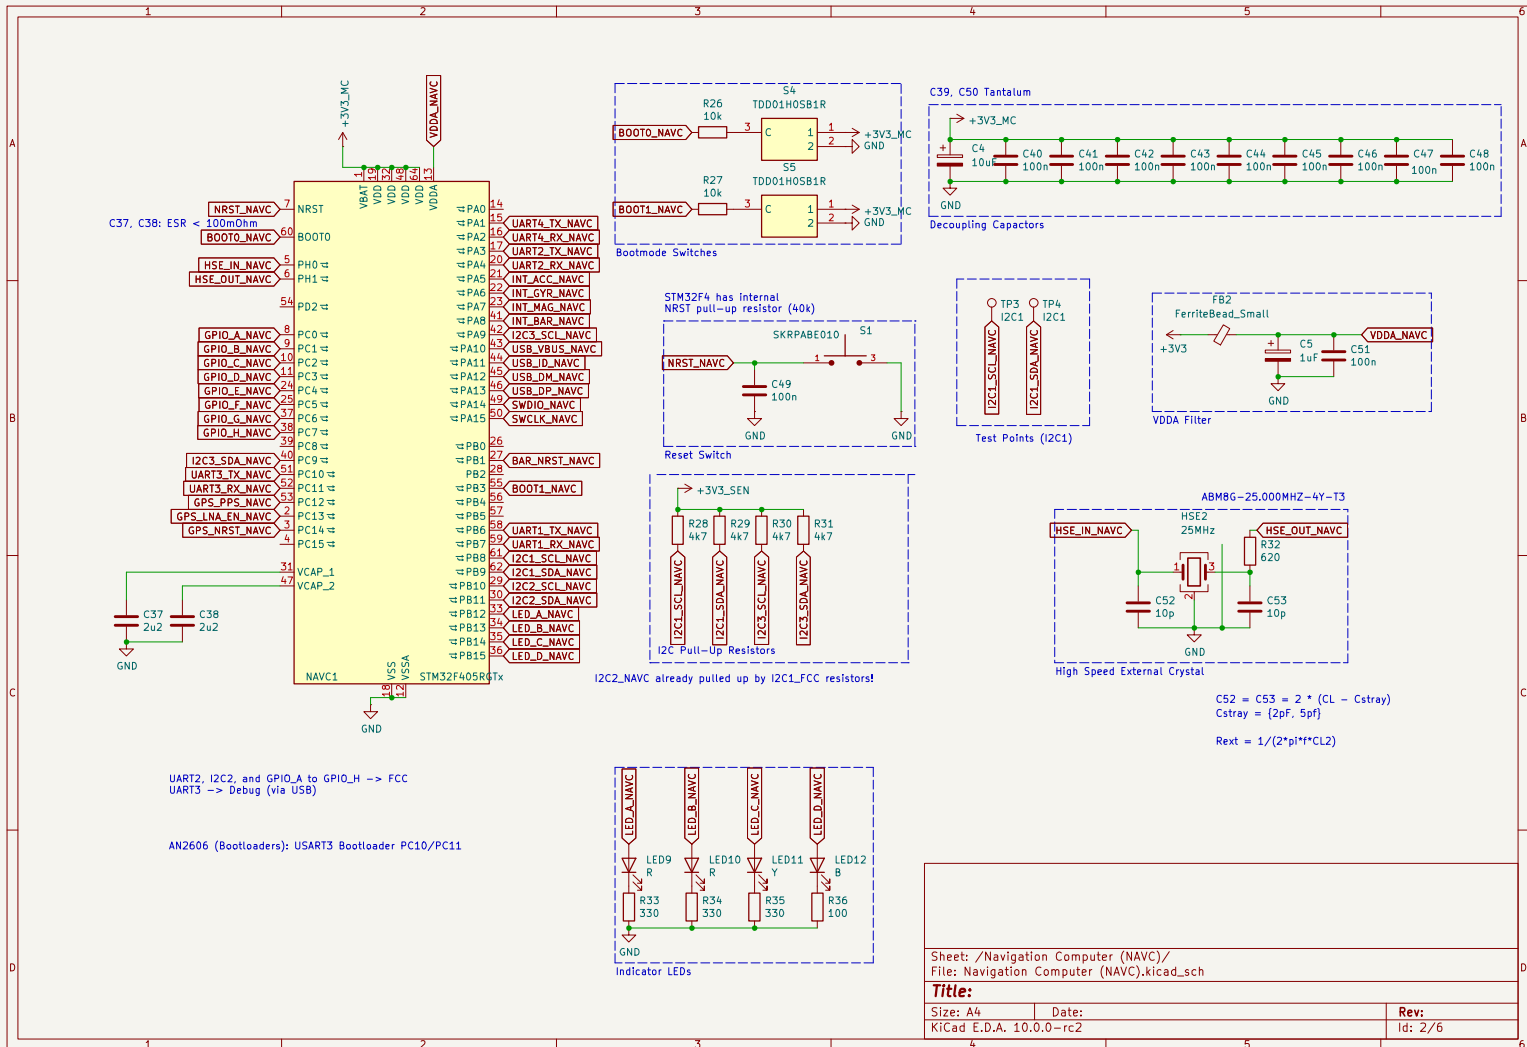

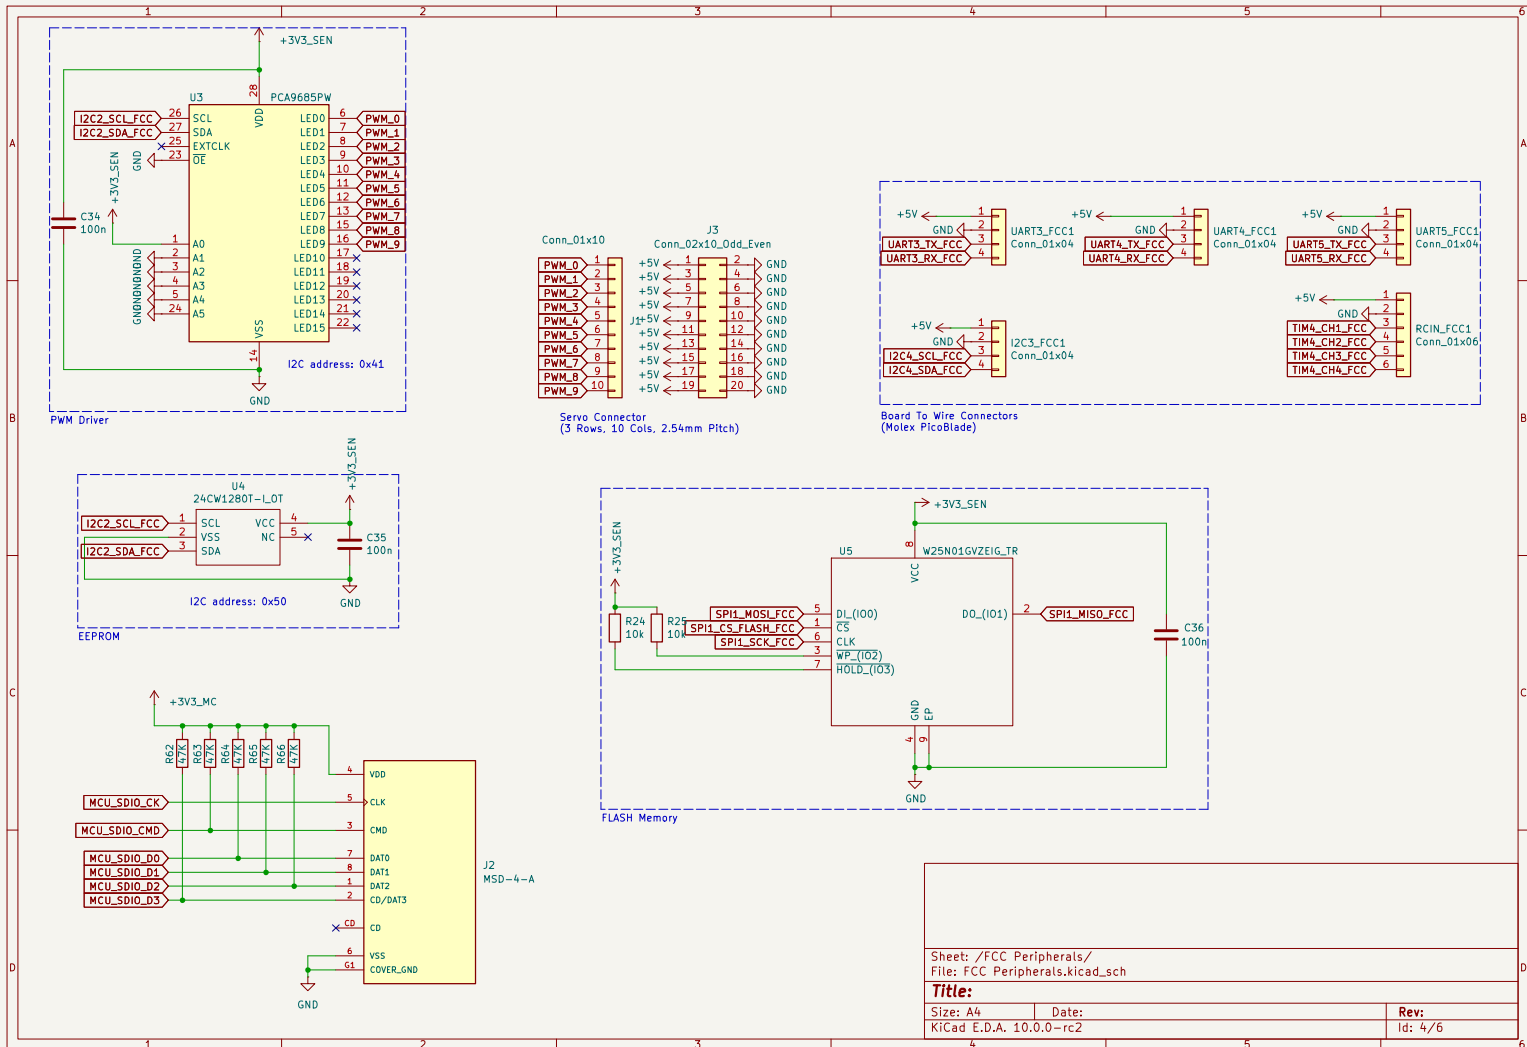


Sheet: /FCC Peripherals/
File: FCC Peripherals.kicad_sch

Title:

Size: A4 Date:
KiCad E.D.A. 10.0.0-rc2

Rev:
Id: 4/6

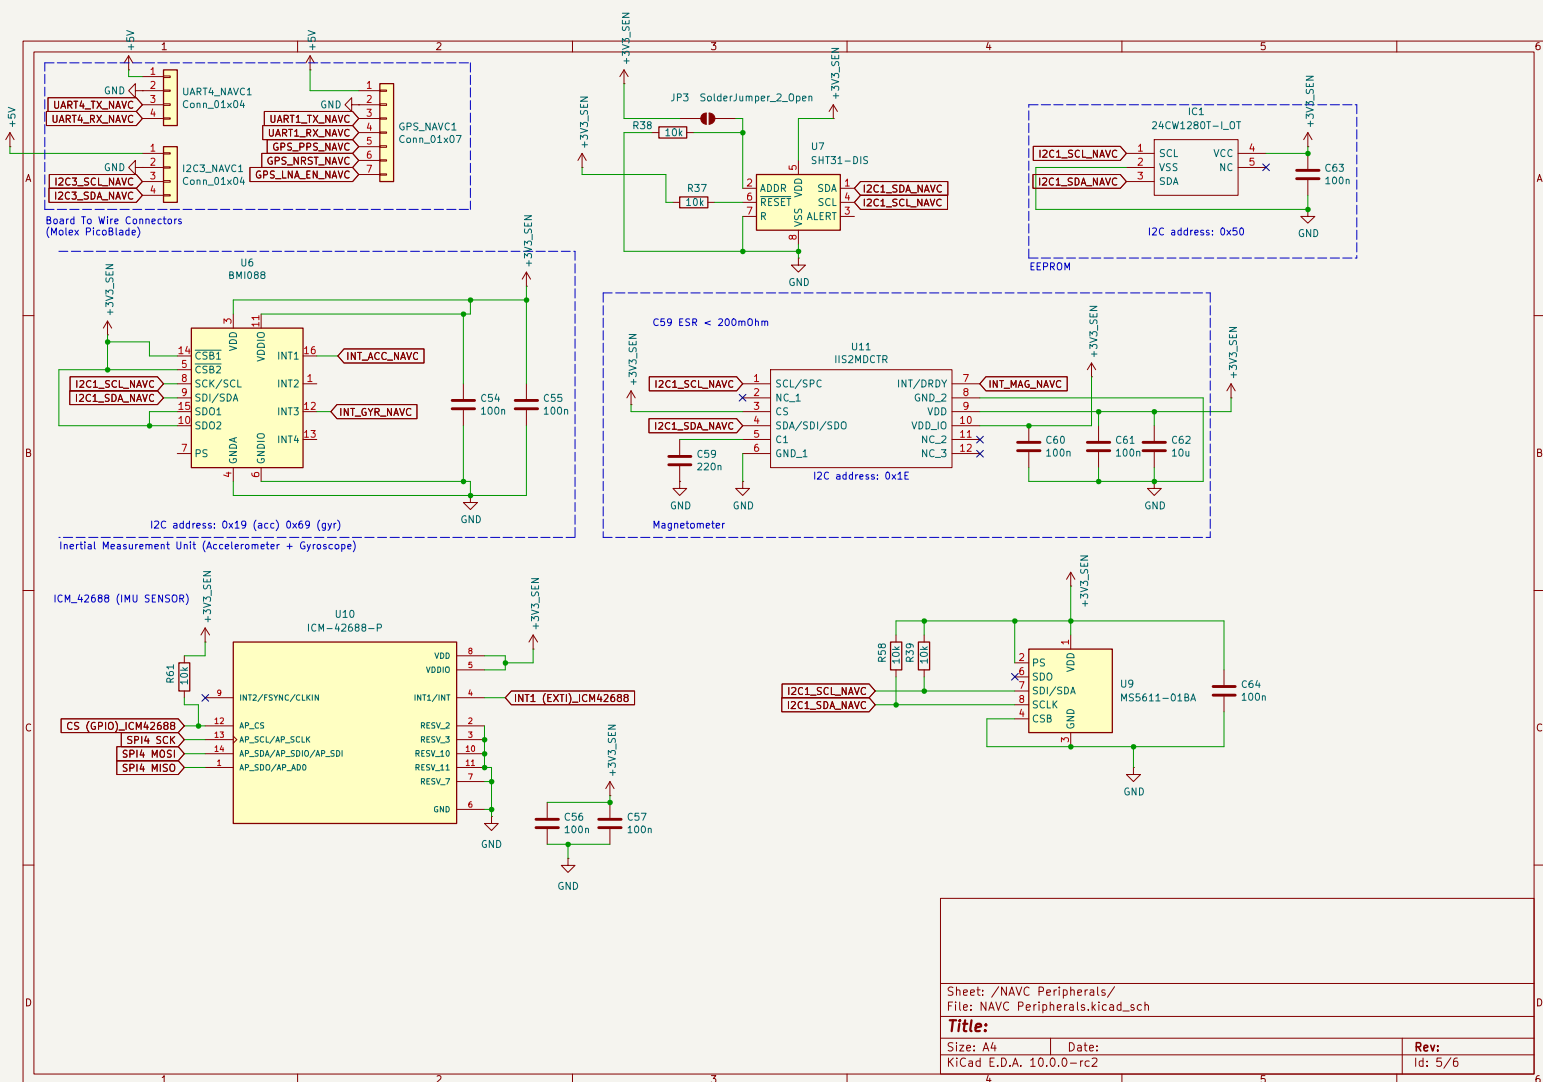

Sheet: /NAVC Peripherals/
File: NAVC Peripherals.kicad_sch

Title:

Size: A4
KiCad E.D.A. 10.0.0-rc2

Date:

Rev:
Id: 5/6

