


Flight Control Computer (FCC)



STM32H7: see AN4938

Not using LSE as do not need RTC


C15, C27, C29 Tantalum

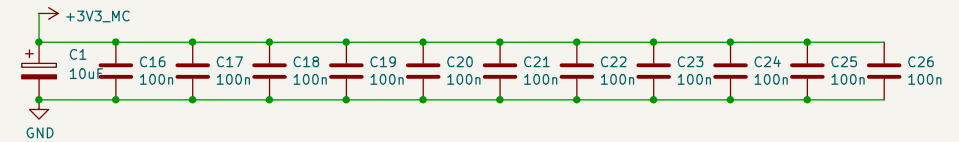


Decoupling Capacitors

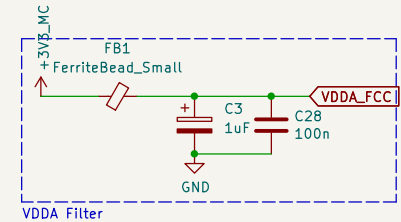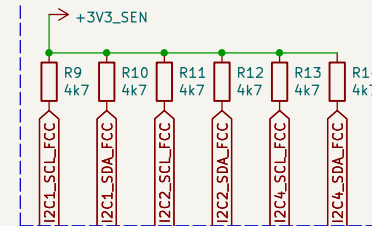


VDDA Filter

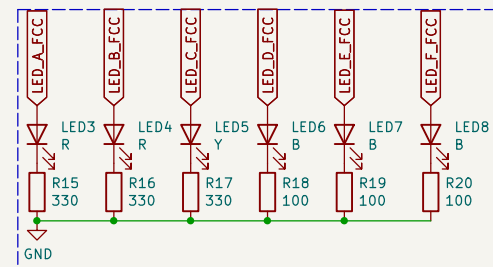

Indicator LEDs

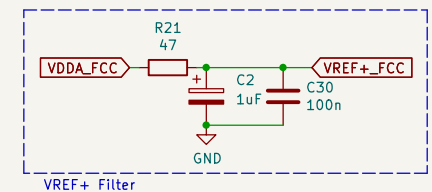

VREF+ Filter

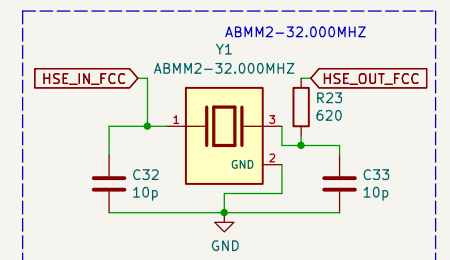


High Speed External Crystal


$$C32 = C33 = 2 * (CL - Cstray) \quad Rext = 1/(2\pi * f * CL2)$$

Cstray = {2pF, 5pF}

STM32H7 has internal NRST pull-up resistor (40k)

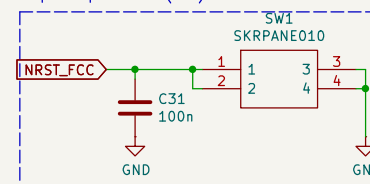

Reset Switch

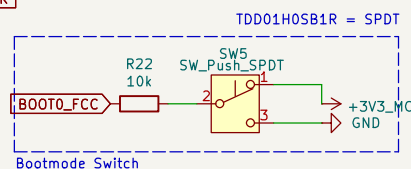

Bootmode Switch

Navigation Computer (NAV_C).kicad_sch

Navigation Computer (NAV_C)

Connections

File: Connections.kicad_sch

FCC Peripherals

File: FCC Peripherals.kicad_sch

NAV_C Peripherals


File: NAV_C Peripherals.kicad_sch





power

File: power.kicad_sch

Power symbol creates a global label with name "GND", ground

AN2606 (Bootloaders): USART1 Bootloader (PB14/PB15)

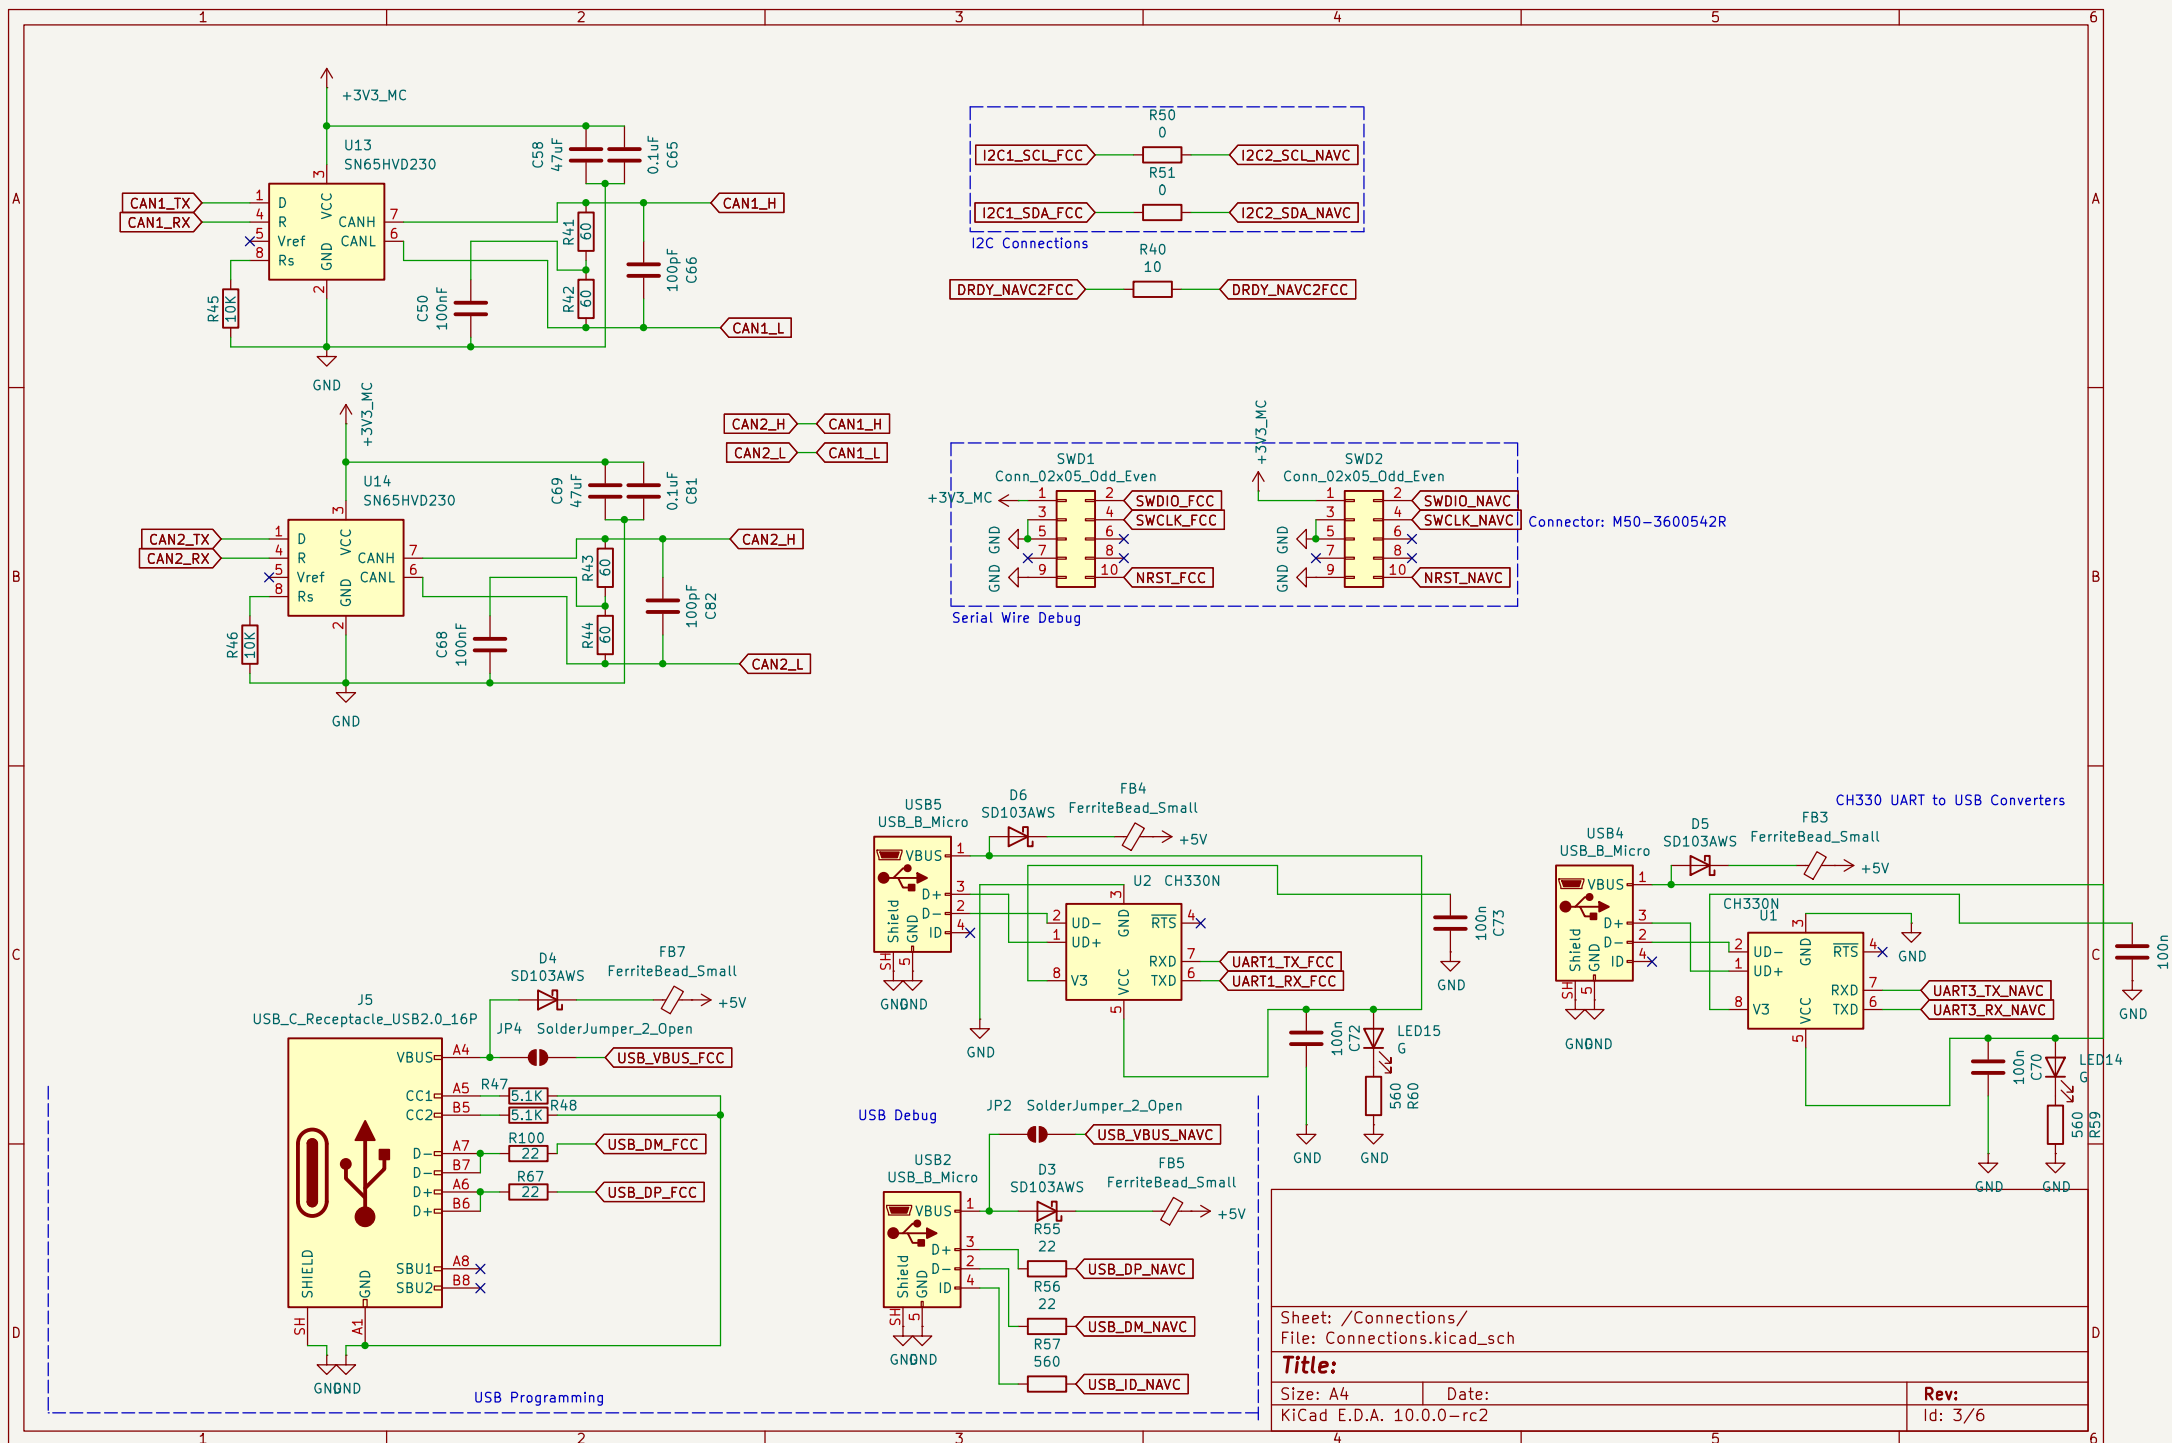

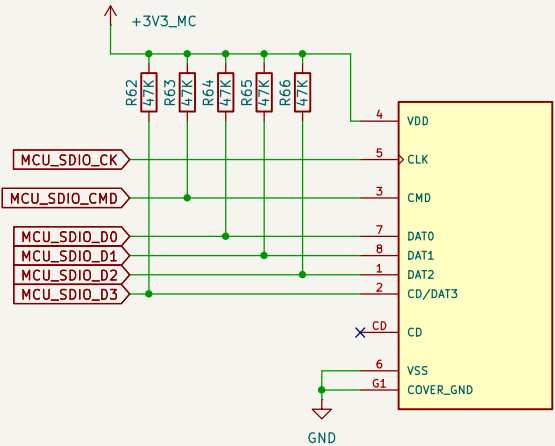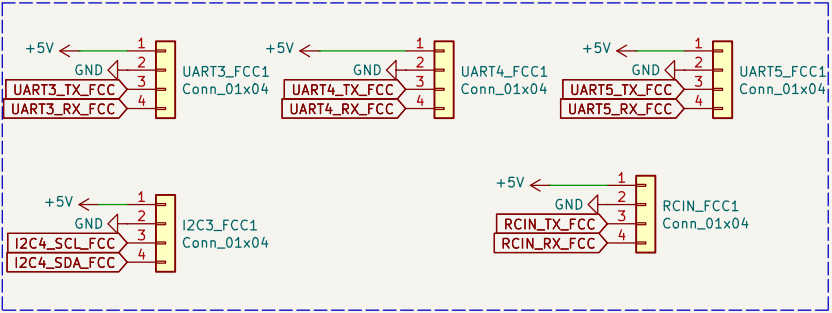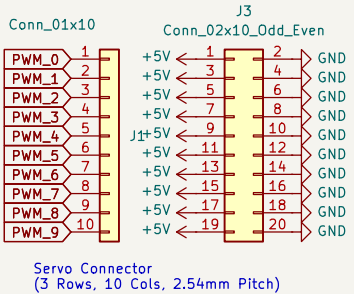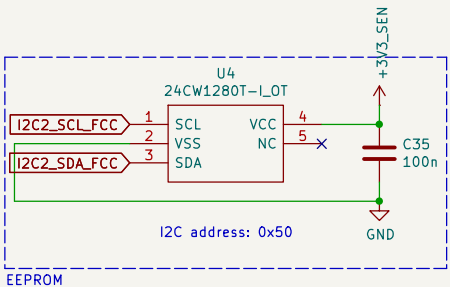

Sheet: /FCC Peripherals/ File: FCC Peripherals.kicad_sch		
Title:		
Size: A4	Date:	Rev:
KiCad E.D.A. 10.0.0-rc2		Id: 4/6

