AND-TFT-43LP
4.3" TFT LCD
aSi LCD Color Module

The AND-TFT-43LP is a compact full color TFT LCD module, that is suitable for portable products, industrial products, hand-held products, security products, instrument displays and office electronics. *Application Precautions: Do not use the products herein for the following equipment which demands extremely high performance in terms of functionality, reliability or accuracy including: aerospace equipment, communication equipment for trunk lines, control equipment for the nuclear power industry, medical equipment related to life support.*

Features
- a-Si Technology Type
- Ultra Compact
- NTSC/PAL/SECAM Video Auto Switch
- Single Operation Voltage +12V
- CVBS / Analog RGB (PC Mode) Signal Input
- All Functions can be controlled UART
- Support Touch Screen Function (Option)
- Digital TFT LCD
- **RoHS complliant**

Mechanical Characteristics

Item	Standard Value	Unit
Screen size	4.3 inch (diagonal)	inch
Display Format	480 x (R, G, B) x 272	dot
Active Area	95.04 (H) x 53.856 (V)	mm
Pixel Pitch	0.198 ((H) x 0.198 (V)	mm
Pixel Configuration	Stripe	–
Outline DImension	105.5 (H) x 67.2 (V) x 2.9 (D)	mm
Surface Treatment	Anti-Glare, Hard Coating (3H)	–
Weight	TBD	grams

Absolute Maximum Ratings: Driving TFT LCD Panel   GND = 0V, Ta = 25ºC

Item	Symbol	Absolute Maximum Rating		Unit	Remarks
		Min.	Max.		
Input Voltage	Vin	9	15	V	
Video Input Signal	Video In	0.5	2.0	Vp-p	@ 75Ω
Analog RGB Input Signal	Analog RGB In	0.5	2.0	Vp-p	@ 75Ω
Digital Input Signal	TTL	+0.3	+3.6	V	
Operating Temperature		-20	+70	ºC	
Storage Temperature		-20	+70	ºC	

Product specifications contained herein may be changed without prior notice.
It is therefore advisable to contact Purdy Electronics before proceeding with the design of equipment incorporating this product.
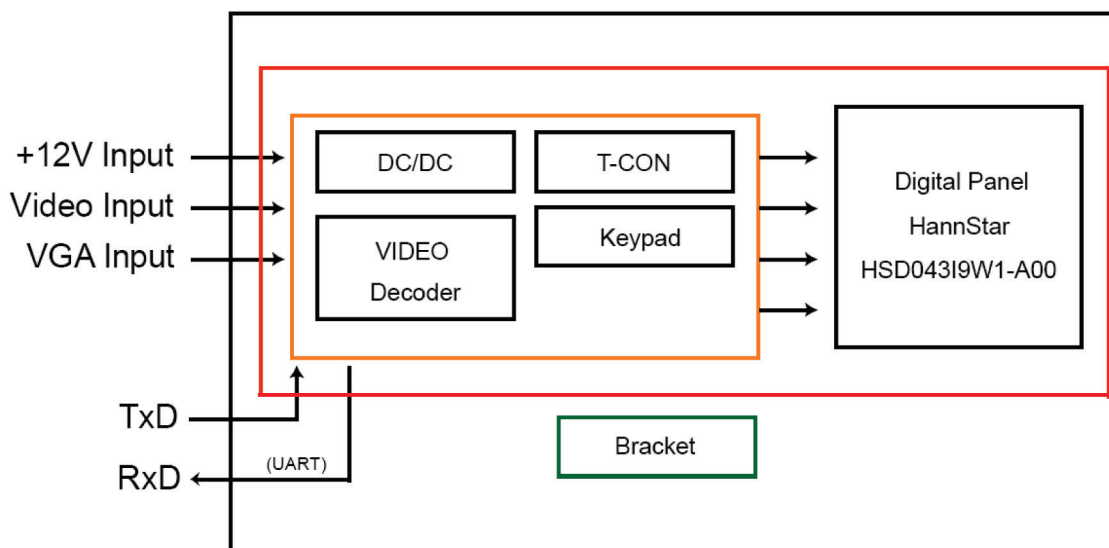
AND Displays

Electrical Characteristics - Recommended Operating Conditions (Ta = 25ºC)

Item	Symbol	I/O	Specifications Min.	Specifications Typ.	Specifications Max.	Unit	Remark
Input Voltage	Vin	I	+10	+12	+14	V	
Total Current	Iin	I	–	–	–	mA	
Power Consumption	=	I	–	–	–	W	@ +12V
Output Voltage	VDD	O	+3.2	+3.3	+3.4	V	I=10mA
Video Input Signal	Video in	I	–	1.0	–	Vp-p	@ 75 Ω
Analog RGB Input Signal	Analog RGB in	RGB	–	0.7	–	Vp-p	@ 75 Ω

Optical Specifications (Ta = 25 ºC)

Item		Symbol	Remarks	Specifications Min.	Specifications Typ.	Specifications Max.	Units
Viewing Angle	Horizontal — Left	Left	CR ≥ 10	65	75	–	deg
	Horizontal — Right	Right		65	75	–	
	Vertical — Top	Top		50	60	–	
	Vertical — Bottom	Bottom		60	70	–	
Contrast Ratio Luminance when LCD is white Luminance when LCD i black		CR	θ = 0º	480	600	–	–
Response Time	Rise	Tr	θ = 0º	—	3	6	ms
	Fall	Tf	θ = 0º	—	7	14	ms
Brightness		LUM		450	500	–	cd/m^2
Uniformity (%)		U		70	75	–	%
White Chhromaticity	x		θ = 0º	0.26	0.31	0.36	–
	y		θ = 0º	0.28	0.33	0.38	–
LED Life Time			+25º	20,000	—	—	Hr

Block Diagram

Dimensional Outline:

3

Purdy Electronics Corporation • 720 Palomar Avenue • Sunnyvale, CA 94085
Tel: 408-523-8200 • Fax: 408-733-1287 • sales@purdyelectronics.com • **www.purdyelectronics.com**

9/29/11

Pin Description - J301: LCD Panel I/O Terminals (FPC 40 Pin Pitch 0.5 mm UP Contact Type)

Pin No.	Symbol	I/O	Description
1	VLED+	P	Power for LED Backlight (Anode)
2	VLED+	P	Power for LED Backlight (Anode)
3	GND	P	Power Ground
4	VDD	P	Power Voltage
5	R0	I	Red Data (LSB)
6	R1	I	Red Data
7	R2	I	Red Data
8	R3	I	Red Data
9	R4	I	Red Data
10	R5	I	Red Data
11	R6	I	Red Data
12	R7	I	Red Data (MSB)
13	G0	I	Green Data (LSB)
14	G1	I	Green Data
15	G2	I	Green Data
16	G3	I	Green Data
17	G4	I	Green Data
18	G5	I	Green Data
19	G6	I	Green Data
20	G7	I	Green Data (MSB)
21	B0	I	Blue Data (LSB)
22	B1	I	Blue Data
23	B2	I	Blue Data
24	B3	I	Blue Data
25	B4	I	Blue Data
26	B5	I	Blue Data
27	B6	I	Blue Data
28	B7	I	Blue Data (MSB)
29	GND	P	Power Ground
30	CLK	I	Pixel Clock
31	DISP	I	Display On/Off
32	HSYNC	I	Horizontal Sync Signal
33	VSYNC	I	Vertical Sync Signal
34	DE	I	Data Enable
35	NC	–	No Connection
36	GND	P	Power Ground
37	X1	I/O	Right Electrode - Differential Analog
38	Y1	I/O	Bottom Electrode - Differential Analog
39	X2	I/O	Left Electrode - Differential Analog
40	Y2	I/O	Top Electrode - Differential Analog

AND Displays

Pin Description - J101B: Pin Assignment of Analog RGB Input (D-Sub 15 Pin)

Pin No.	Symbol	I/O	Description
1	RI+	I	Analog Red Signal
2	GI+	I	Analog Green Signal
3	BI+	I	Analog Blue Signal
4	NC	–	No Connection
5	GND	–	Ground
6	AGND	–	Analog Ground
7	AGND	–	Analog Ground
8	AGND	–	Analog Ground
9	VGA5V	–	VGA +5V Input
10	VGA-DET	I	VGA Detect
11	NC	–	No Connection
12	NC	–	No Connection
13	HS_IN	I	TTL Horizontal Sync
14	VS_IN	I	TTL Vertical Sync
15	NC	–	No Connection

Pin Description - J104: Pin Assignment of UART (Pitch 1.25 mm 4 Pin, Top Entry Type)

Pin No.	Symbol	I/O	Description
1	TX	O	UART Transmission Data
2	RX	I	UART Receive Data
3	GND	–	Ground
4	+3.3VA	O	+3.3V Output Volttage

Pin Description - DC JACK: Pin Assignment of Power Input (Inside Diameter 2.1 φ Outside Diameter 5.5 φ Side Entry Type)

Pin No.	Symbol	I/O	Description
1	VIN	I	+12V Input Voltage
2	GND	–	Power Ground

Pin Description - RCA: Pin Assignment of Video INput (RCA JACK Yellow, Side Entry Type)

Pin No.	Symbol	I/O	Description
1	Video	I	Video Input
2	AGND	–	Analog Ground