AND Displays

AND-TFT-56LP
5.6" TFT LCD
aSi LCD Color Module

The AND-TFT-56LP is a compact full color TFT LCD module, that is suitable for portable products, industrial products, hand-held products, security products, instrument displays and office electronics.

Features
• 640 (RGB) x 480 Resolution
• a-Si Technology Type
• Ultra Compact
• NTSC/PAL/SECAM Video Auto Switch
• Single Operation Voltage +12V
• CVBS / S-Video (Option) / Analog RGB (PC Mode) Signal Input
• All functions can be controlled by UART
• **RoHS complliant**

Mechanical Characteristics

Item	Standard Value	Unit
Screen size	5.6 inch (diagonal)	inch
Display Format	640 x (R, G, B) x 480	dot
Active Area	112.896 (H) x 84.672 (V)	mm
Outline Dimensions	126.5 (W) x 100 (H) x 5.7 (D) (Typ.)	mm
Pixel Pitch	0.1764 ((H) x 0.1764 (V)	mm
Pixel Configuration	Stripe	–
Surface Treatment	Anti-Glare	–
Display Mode	Normally White, Transmissive	–
Weight	88	grams

Absolute Maximum Ratings: Driving TFT LCD Panel   GND = 0V, Ta = 25ºC

Item	Symbol	Absolute Maximum Rating		Unit	Remarks
		Min.	Max.		
Input Voltage	Vin	+9	4.6	V	
Video Input Signal	Video In	0.5	2.0	Vp-p	@75Ω
S-Video Input Signal	S-Video in	0.5	2.0	Vp-p	@75Ω
Analog RGB Input Signal	Analog RGB In	0.5	2.0	Vp-p	@75Ω
Digital Input Signal	TTL	+0.3	+3.6	V	
Operating Temperature without TSP		-20	+60	ºC	
Operating Temperature with TSP		-20	+60	ºC	
Storage Temperature without TSP		-20	+70	ºC	
Storage Temperature with TSP		-20	+70	ºC	

Product specifications contained herein may be changed without prior notice.
It is therefore advisable to contact Purdy Electronics before proceeding with the design of equipment incorporating this product.

Displays

Electrical Characteristics - Recommended Operating Conditions (Ta = 25ºC)

Item	Symbol	I/O	Specifications Min.	Specifications Typ.	Specifications Max.	Unit	Remark
Input Voltage	Vin	I	+10	+12	+14	V	
Total Current	Iin	I		315		mA	
Power Consumption		I		3.78		W	@ +12V
Output Voltage	VDD	O	+3.2	+3.3	+3.4	V	I=10mA
Video Input Signal	Video in	I		1.0		Vp-p	@75Ω
S-Video Input Signal	S-Video in (Y)	I		0.7		Vp-p	@75Ω
	S-Video in (C)	I		0.286		Vp-p	@75Ω
Analog RGB Input SIgnal	Analog RGB in (RGB)	I		0.7		$\varsigma\pi-\pi$	@75Ω

Optical Specifications (Ta = 25 ºC)

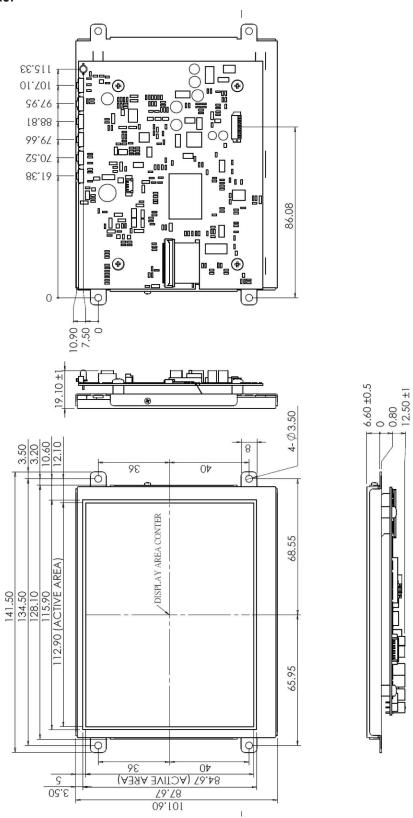| Item		Symbol	Remarks	Specifications Min.	Specifications Typ.	Specifications Max.	Units
Viewing Angle	Horizontal	Left	CR ≥ 10	60	70	–	deg
		Right		60	70	–	
	Vertical	Top		40	50	–	
		Bottom		60	70	–	
Contrast Ratio Luminance when LCD is white Luminance when LCD i black		CR	At Optimized Viewing Angle	400	500	–	–
Response Time	Rise	Tr	θ = 0º	—	10	20	ms
	Fall	Tf	θ = 0º	—	15	30	ms
Brightness		LUM		300	350	–	cd/m^2
Uniformity (%)		U		70	75	–	%
White Chhromaticity		x	θ = 0º	0.26	0.31	0.36	–
		y	θ = 0º	0.28	0.33	0.38	–
LED Life Time			25º	20,000	—	—	Hr

VGA Mode Characteristics - Recommended Operating Conditions (Ta = 25ºC)

Dots per inch	Hor.	Unit	Polarity	Ver.	Unit	Polarity
640 x 480	31.469	KHz	Negative	59.941	Hz	Negative
800 x 600	37.879	KHz	Positive	60.317	Hz	Positive
1024 x 768	48.363	KHz	Negative	60.004	Hz	Negative

AND Displays

Dimensional Outline:

Purdy Electronics Corporation • 720 Palomar Avenue • Sunnyvale, CA 94085
Tel: 408-523-8200 • Fax: 408-733-1287 • sales@purdyelectronics.com • **www.purdyelectronics.com**

3

05/09/11

AND Displays

Pin Description - J302: Innolux LCD Panel I/O Terminals (FPC 40 pin below contact type)

Pin No.	Symbol	I/O	Description
1	VLED	P	Power Voltage for LED circuit
2	VLED	P	Power Voltage for LED circuit
3	ADJ	I	Adjust the LED brightness with PWN Pulse
4	GLED	P	Ground for LED circuit
5	GLED	P	Ground for LED circuit
6	VCC	P	Power voltage for digital circuit
7	VCC	P	Power voltage for digital circuit
8	MODE	I	DE or HV mode control
9	DE	I	Data Enable
10	VS	I	Vsync Signal Input
11	HS	I	Hsync Signal Input
12	GND	P	Power Ground
13	B5	I	Blue data input (MSB)
14	B4	I	Blue data input
15	B3	I	Blue data input
16	GND	P	Power Ground
17	B2	I	Blue data input
18	B1	I	Blue data input
19	B0	I	Blue data input (LSB)
20	GND	P	Power ground
21	G5	I	Green data input (MSB)
22	G4	I	Green data input
23	G3	I	Green data input
24	GND	P	Power ground
25	G2	I	Green data input
26	G1	I	Green data input
27	G0	I	Green data input (LSB)
28	GND	P	Power ground
29	R5	I	Red data input (MSB)
30	R4	I	Red data input
31	R3	I	Red data input
32	GND	P	Power ground
33	R2	I	Red data input
34	R1	I	Red data input
35	R0	I	Red data input (LSB)
36	GND	P	Power gounrd
37	DCLK	I	Sample Clock
38	GND	P	Power ground
39	L/R	I	Select left to right scanning direction
40	U/D	I	Select up or down scanning direction

Pin Description - J106B: Pin Assignment of Analog RB Input (D-Sub 15 pin)

Pin No.	Symbol	I/O	Description
1	RI+	I	Analog Red Signal
2	GI+	I	Analog Green Signal
3	BI+	I	Analog Blue Signal
4	NC	–	No Connection
5	GND	–	Ground
6	AGND	–	Analog Ground
7	AGND	–	Analog Ground
8	AGND	–	Analog Ground
9	NC	–	No Connection
10	NC	–	No Connection
11	NC	–	No Connection
12	NC	–	No Connection
13	HS_IN	I	TTL Horizontal sync
14	VS_IN	I	TTL Vertical sync
15	NC	–	No Connection

Pin Description - J104: Pin Assignment of UART (Pitch 1.25 mm 4 pin, Top entry type)

Pin No.	Symbol	I/O	Description
1	TX	O	UART Transmission Data
2	RX	I	UART Receive Data
3	GND	–	Ground
4	VDDP	O	+3.3V Output voltage

Pin Description - DC 101: Pin Assignment of Power Input (Inside Diameter: 2.1 Φ Outside Diameter: 5.5 Φ Side entry type)

Pin No.	Symbol	I/O	Description
1	VIN	I	+12V Input Voltage
2	GND	–	Power Ground

Pin Description - RCA 101: Pin Assignment of Video Input (RCA JACK Yellow, Side Entry Type)

Pin No.	Symbol	I/O	Description
1	Video	I	Video Input
2	AGND	–	Analog Ground

Pin Description - J107A: Pin Assignment of Signal Input (Pitch 1.25mm, 8 Pin, Top Entry Type)

Pin No.	Symbol	I/O	Description
1	VCC12V	–	+12V Input Voltage
2	VCC12V	–	+12V Input Voltage
3	GND_D	–	Ground
4	GND_D	–	Ground
5	VIDEO1	I	Video 1 Input Signal
6	GND_A	–	Ground for Video 1
7	VIDEO2	I	Video 2 Input Signal
8	GND_A	–	Ground for Video 2

Pin Description - J404: Pin Assignment of Touch USB (USBA-Female 2.0 mm, Side Entry Type) (Option)

Pin No.	Symbol	I/O	Description
1	DGND	–	Digital Ground
2	D+	–	Data (+)
3	D-	–	(Data (-)
4	VBUS	–	USB VCC

Pin Description - DB401: Pin Assignment of Touch RS232 (D-SUB 9 Female) (Option)

Pin No.	Symbol	I/O	Description
1	–	–	Don't Connect
2	TXD	–	Transmit Data
3	RXD	–	Receive Data
4	–	–	Don't Connect
5	GND	–	Ground
6	NC	–	No Connection
7	–	–	Don't Connect
8	–	–	Don't Connect
9	NC	–	No Connection

Block Diagram

6

Purdy Electronics Corporation • 720 Palomar Avenue • Sunnyvale, CA 94085
Tel: 408-523-8200 • Fax: 408-733-1287 • sales@purdyelectronics.com • **www.purdyelectronics.com**

05/09/11