Displays

AND050VL-LED-KIT
640 x 480 Pixels
LCD Color Monitor

The AND050VL-LED-KIT is a compact full color TFT LCD module, whose driving board is capable of converting composite video signals to the proper interface of LCD panel and is suitable for computer peripheral, industrial meter, image communication and multi media.

This device consists of an amorphous silicon panel with back-light, incorporating a TFT-array that has 640 x 480 pixels on a 5 inch diagonal screen, with pixel in stripe configuration, 262,144 display colors and a TTL transmission interface.

Features

- VGA (640 x 480 pixels) resolution
- Amorphous silicon TFT LCD panel with LED back-light
- Pixel in stripe configuration
- Light weight and slim
- Displays 262,144 colors
- Optimum Viewing Direction: 6 o'clock
- Image Reversion: Up/Down & Left/Right
- Supports the DENB mode, Sync mode (Hsync+Vsync)
- LVDS transmission interface
- **RoHS Compliant**

Mechanical Characteristics

Parameter	Specification	Unit
Screen Size	5.0 (diagonal)	inch
Display Format	640 (H) x (R, G, B) x 480(V)	dot
Display Colors	262,144	
Active Area	101.76 (H) x 74.88 (V)	mm
Pixel Pitch	0.159 (H) x 0.156 (V)	mm
Pixel Configuration	Stripe	
Outline Dimension	120.7 (H) x 92.8 (V) x 12.5 (D)	mm
Weight	173.6 ± 10	g
Back-light	24-LED	
Diplay Mode / Surface	Normally white / Anti-glare & SWV film	

Recommended Driving Condition for LED Back Light

GND= 0V Ta=25ºC

Parameter	Symbol	Specifications			Unit	Remark
		Min.	Typ.	Max.		
Supply Voltage of LED Backlight	V_{LED}	–	11.0	11.5	V	I_L=20mA
Supply Current of LED Backlight	I_{LED}	–	20	–	mA	Note 1
Backlight Power Consumption	P_{LED}	–	1.76	1.84	W	Note 2

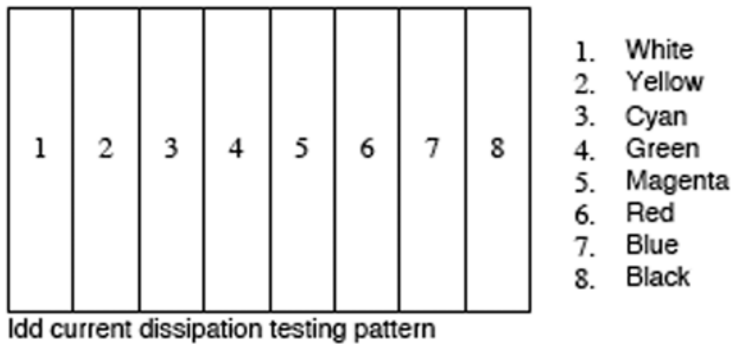Note 1: The LED driving condition is defined for each LED module. (3 LED Serial)
Note 2: $P_{LED} = V_{LED1} * I_{LED1} + V_{LED2} * I_{LED2} .... + V_{LED7} * I_{LED7} + V_{LED8} * I_{LED8}$

Product specifications contained herein may be changed without prior notice. It is therefore advisable to contact Purdy Electronics before proceeding with the design of equipment incorporating this product.

Electrical Characteristics: Recommended Operating Conditions GND=0V, Ta=25ºC

Item	Symbol	Specifications			Unit	Remark
		Min.	Typ.	Max.		
Supply Voltage	V_{CC}	3.0	3.3	3.6	V	
Current Dissipation	I_{CC}	–	77.90	–	mA	Note 1
LVDS Differential Input High Threshold	V_{TH}	–	–	100	mV	Note 2
LVDS Differential Input Low Threshold	V_{TL}	-100	–	–		Note 2
V_{oom} Voltage	V_{ccm}	–	2.7	–	V	

Note 7-1 : To test the current dissipation of VCC using the "color bars" testing pattern shown as below

| 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 |

1. White
2. Yellow
3. Cyan
4. Green
5. Magenta
6. Red
7. Blue
8. Black

Idd current dissipation testing pattern

Note7-2 : Please refers to THC63LVDF64A specification by THINE Corporation. This LCD module conforms to LVDS standard.

Absolute Maximum Ratings*:   GND=OV, Ta=25ºC

Parameters	Symbol	Min.	Max.	Unit	Remark
Supply Voltage	V_{CC}	-0.3	+7.0	V	
Input Signals Voltage	V_{sig}	-0.3	V_{CC}+0.3	V	Note 1

* The above are maximum values, which if exceeded, may cause faulty operation or damage to the unit.

Note 1: Input signals include CLK, Hsync, Vsync, DENB, R[0:5], G[0:5] and B[0:5].

Optical Characteristics Ta = 25ºC

Parameter		Symbol	Conditions	Specifications			Unit
				Min.	Typ.	Max.	
Viewing Angle	Horizontal	θ = 21, 22	CR $\geq$ 10	±55	±60		deg
	Vertical	θ = 12		30	40	–	
		θ = 11		50	55	–	
Contrast Ratio		CR	at optimized viewing angle	200	400	–	–
Response Time	Rise	Tr	θ = 0º	–	15	30	ms
	Fall	Tf		–	25	50	
Brightness		L	θ = 0º	400	450	–	cd/m2
Luminance Uniformity		U		70	80	–	%
LED Life Time			+25ºC	20,000	30,000	–	hr
White Chromaticity		x	θ =0º	0.28	0.31	0.34	–
		y		0.31	0.34	0.37	
Cross Talk			θ =0º	–	–	3.5	%

LVDS Interface Block Diagram

05/13/03

Purdy Electronics Corporation • 720 Palomar Avenue • Sunnyvale, CA 94085
Tel: 408.523.8200 • Fax: 408.733.1287 • sales@purdyelectronics.com • www.purdyelectronics.com

3
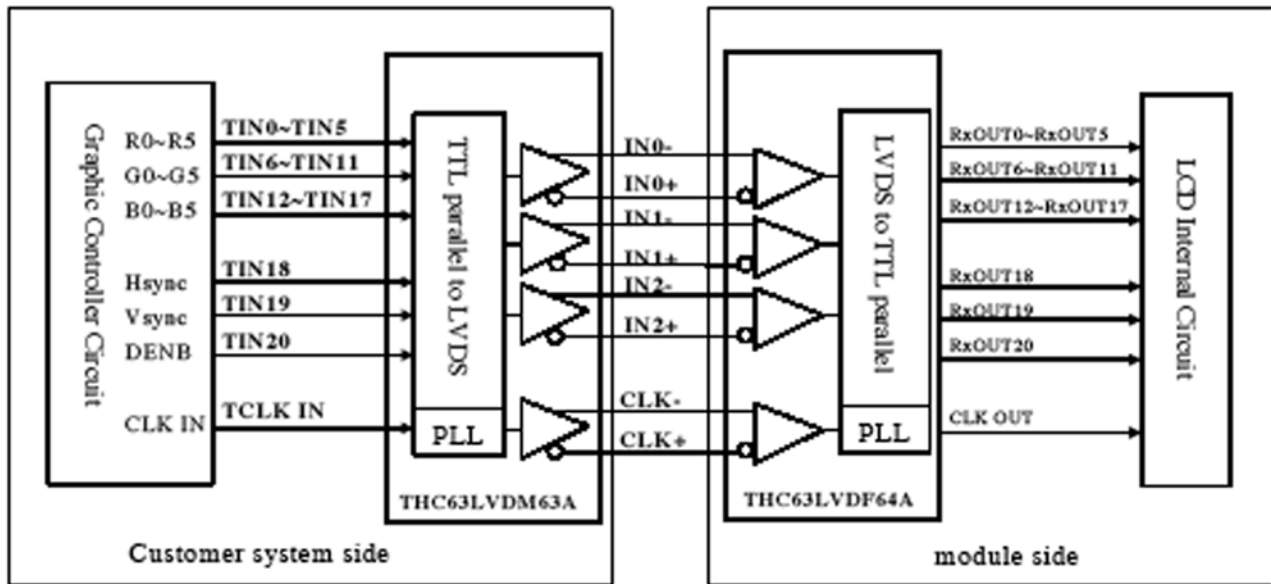
Input Terminals:
TFT-LCD Panel Driving
Connector Type: DFL19K-20P-1H(HRS)

Pin #.	Symbol	Function
1	Vcc	+3.3V Power Supply
2	Vcc	+3.3V Power Supply
3	GND	Ground
4	GND	Ground
5	IN0-	LVDS receiver signal channel 0
6	IN0+	LVDS receiver signal channel 0
7	GND	Ground
8	IN1-	LVDS receiver signal channel 1
9	IN1+	LVDS receiver signal channel 1
10	GND	Ground
11	IN2-	LVDS receiver signal channel 2
12	IN2+	LVDS receiver signal channel 2
13	GND	Ground
14	CLK-	LVDS receiver signal clock
15	CLK+	LVDS receiver signal clock
16	GND	Ground
17	NC	No Connection
18	NC	No Connection
19	GND	Ground
20	GND	Ground

Backlight Driving
Connector Type: JST BHSR-02VS-1, Pin No 2-pin

Pin No.	Symbol	Description	Remarks
1	+	Input terminal (Positive electrode side)	Wire color: Red
2	-	Input terminal (Ground side)	Wire color: Black

Pixel Arrangement - The LCD module pixel arrangement is stripe.
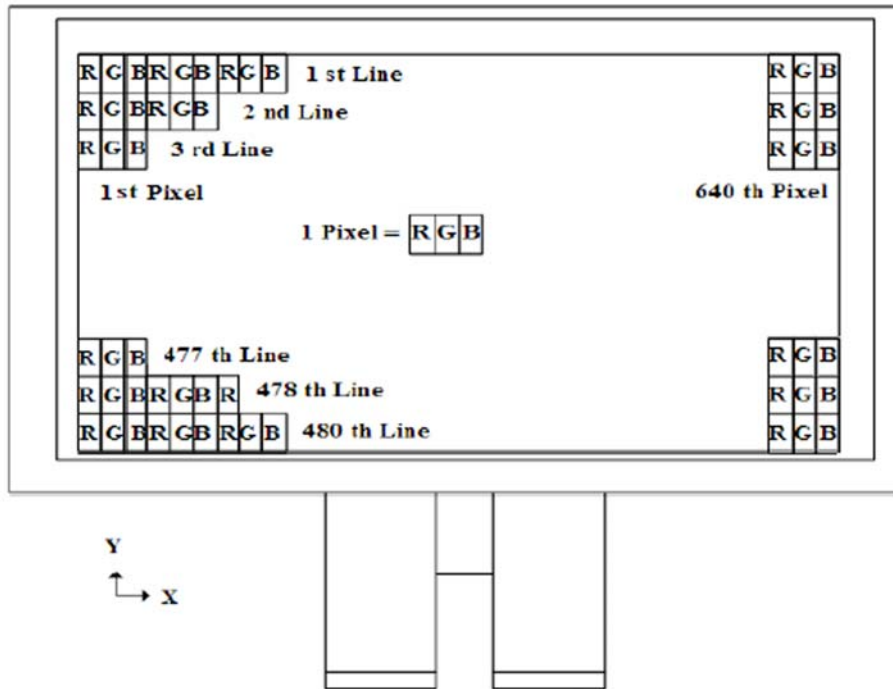
Block Diagram - TFT-module Block Diagram.
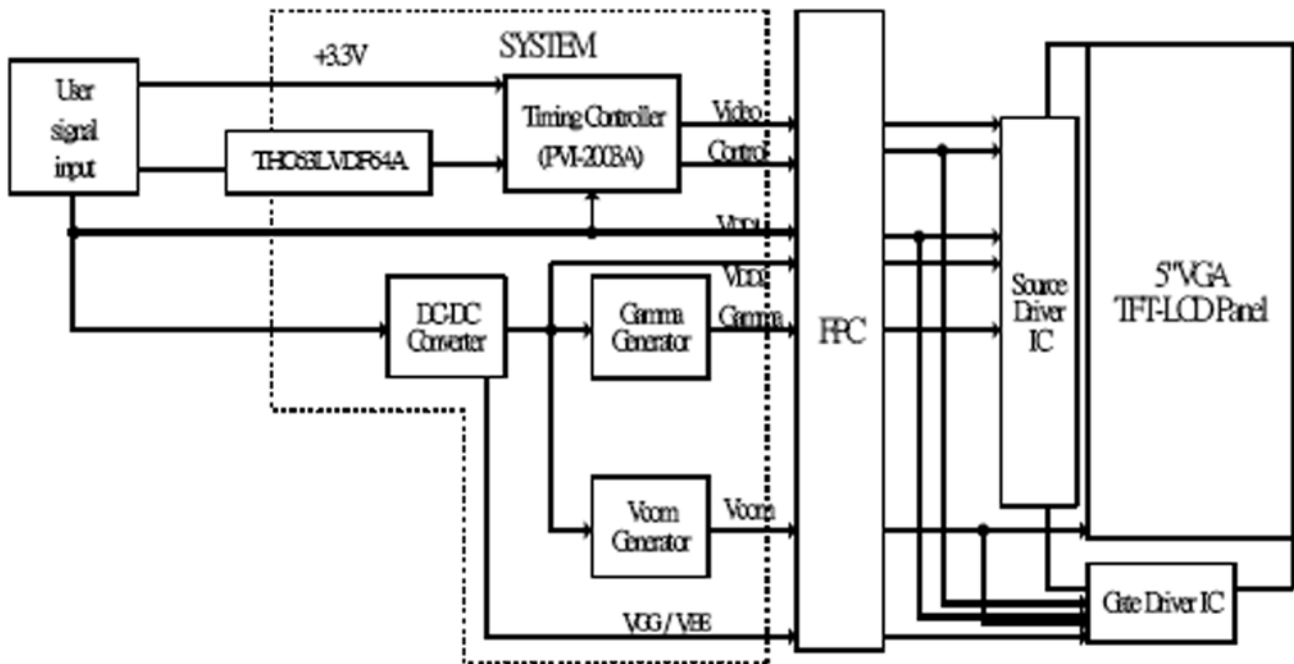
–
Interface Timing: Timing Parameters

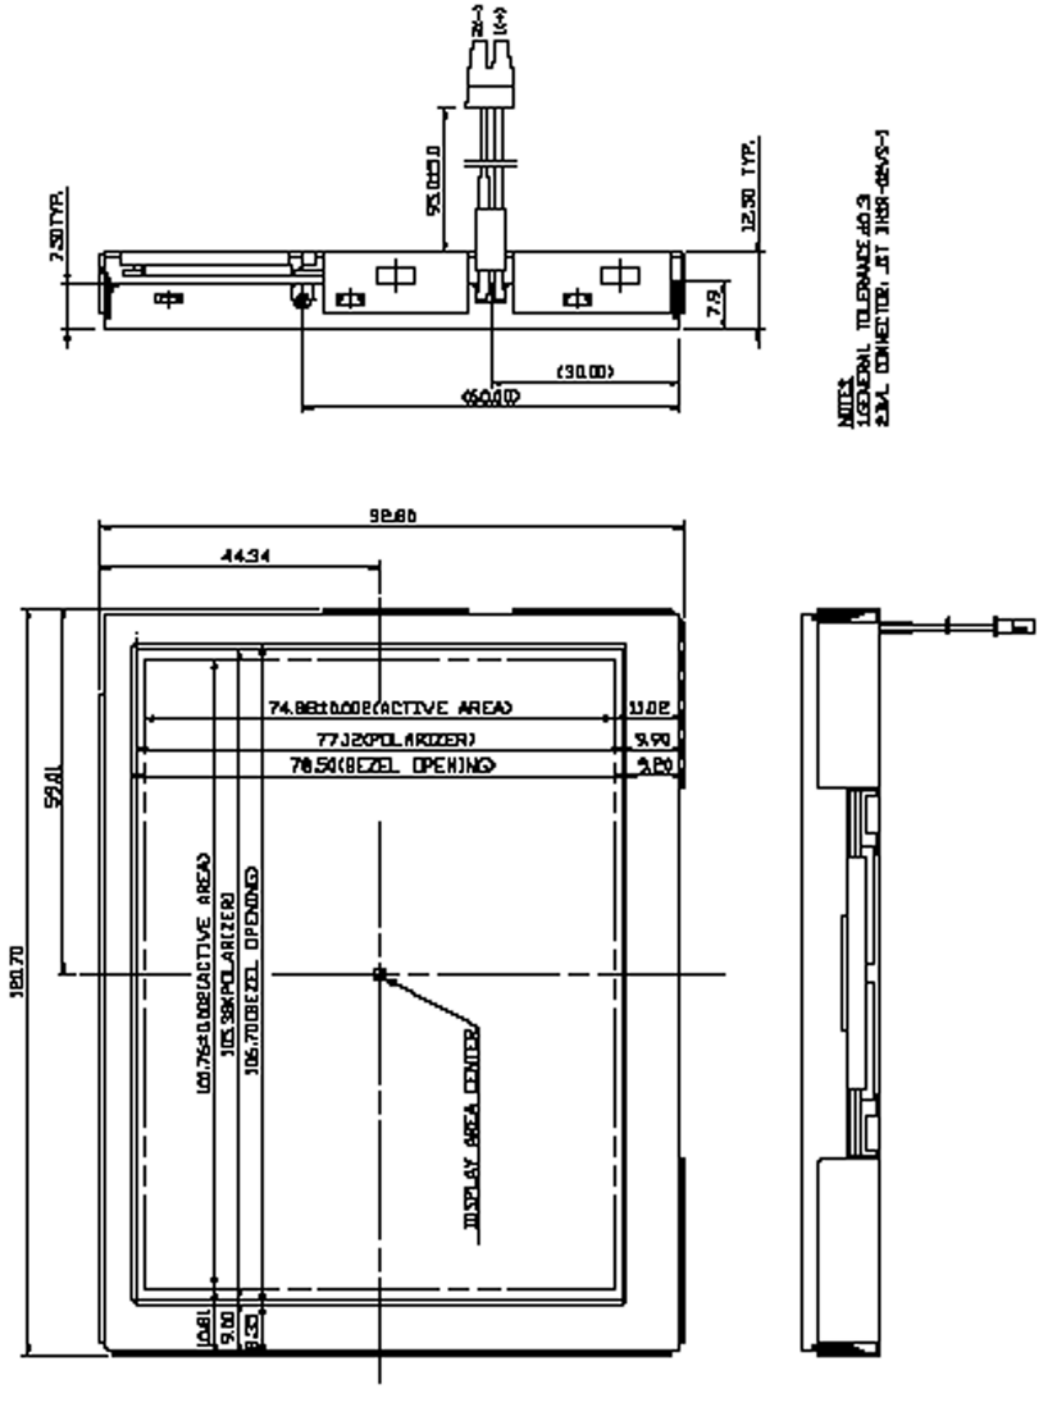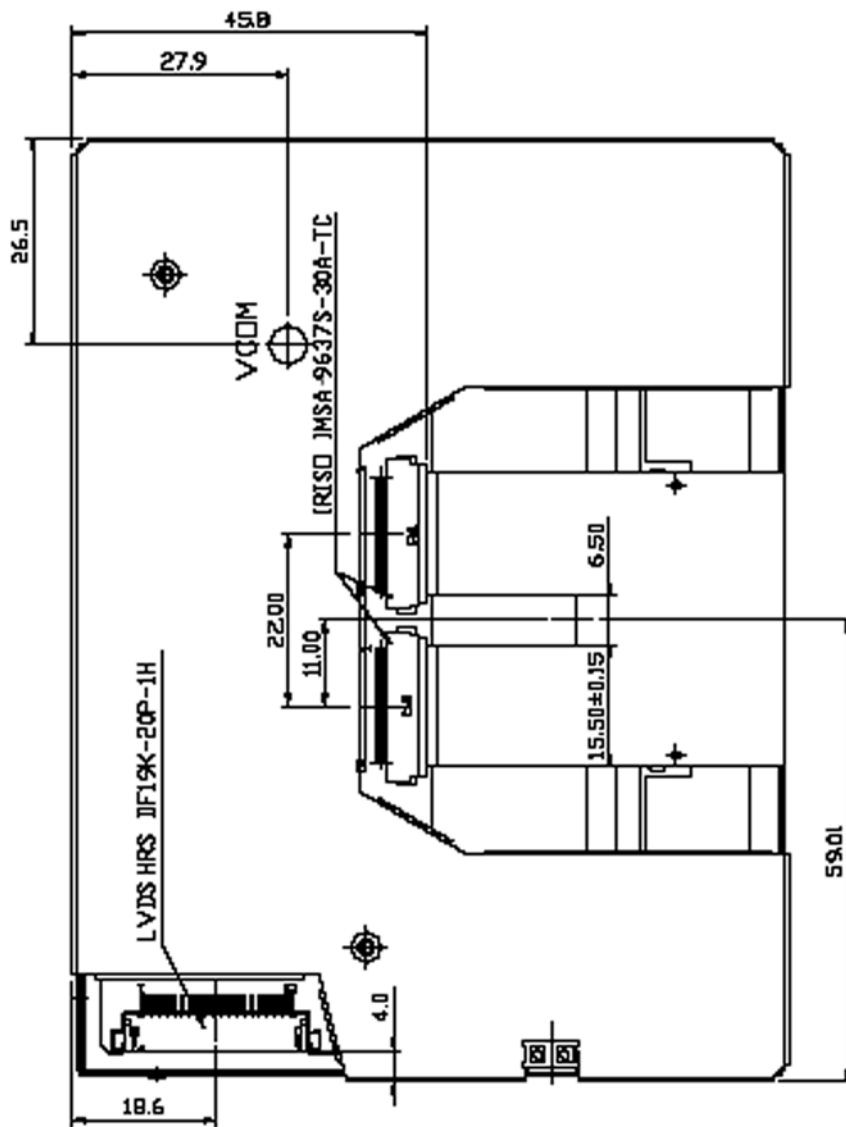| Item		Symbol	Min.	Typ.	Max.	Unit
Power Supply		VCC	3.0	3.3	3.6	V
CLK	Frequency	1/tc	–	25	–	MHz
		tc	–	40	–	ns
HSYNC	Period	Hp	–	32	–	us
			–	800	–	tc
	Display period	Hdp	–	640	–	tc
	Pulse width	Hpw	–	96	–	tc
	Back-porch	Hbp	–	46	–	tc
	Front-porch	Hfp	–	18	–	tc
	Hpw+Hbp	–	–	142	–	tc
	Hsync-CLK	Hhc	10	–	Tc-10	ns
	Vsync-Hsync	Hvh	0	0	200	tc
VSYNC	Period	Vp	–	16.8	–	ms
			–	525	–	Hp
	Display period	Vdp	–	480	–	Hp
	Pulse width	Vpw	–	2	–	Hp
	Back-porch	Vbp	–	33	–	Hp
	Front-porch	Vfp	–	10	–	Hp
	Vpw + Vbp	–	–	35	–	Hp
DENB	Horizontal scanning period	T1	–	800	–	tc
	Horizontal display period	T2	–	640	–	tc
	Vertical display period	T3	–	480	–	T1
	Frame cycling period	T4	520	525	800	T1
R, G, B	CLK-DATA	Dcd	10	–	–	ns
	DATA-CLK	Ddc	8	–	–	ns

Mechanical Drawing of TFT-LCD Module

Outline Drawing : Front View (unit mm)

05/13/03

Purdy Electronics Corporation • 720 Palomar Avenue • Sunnyvale, CA 94085
Tel: 408.523.8200 • Fax: 408.733.1287 • sales@purdyelectronics.com • www.purdyelectronics.com

7

AND Displays

Ouline drawing : Rear View (unit mm)

Displays

AND050VL-LED-KIT

Display Color and Gray Scale Reference

Color		Input Color Data																		
		Red						Green						Blue					
		R5	R4	R3	R2	R1	R0	G5	G4	G3	G2	G1	G0	B5	B4	B3	B2	B1	B0
Basic Color	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Red (63)	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0
	Green (63)	0	0	0	0	0	0	1	1	1	1	1	1	0	0	0	0	0	0
	Blue (63)	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1
	Cyan	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	1	1
	Magenta	1	1	1	1	1	1	0	0	0	0	0	0	1	1	1	1	1	1
	Yellow	1	1	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0
	White	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Gray Scale of Red	Red (00)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Dark	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0
		0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0
				:						:						:			
				:						:						:			
		1	1	1	1	0	1	0	0	0	0	0	0	0	0	0	0	0	0
	Light	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0
	Red (63)	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0
Gray Scale of Green	Green (00)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Dark	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0
		0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0
				:						:						:			
				:						:						:			
		0	0	0	0	0	0	1	1	1	1	0	1	0	0	0	0	0	0
	Light	0	0	0	0	0	0	1	1	1	1	1	0	0	0	0	0	0	0
	Green	0	0	0	0	0	0	1	1	1	1	1	1	0	0	0	0	0	0
Gray Scale of Blue	Blue (00)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Dark	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1
		0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0
				:						:						:			
				:						:						:			
		0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	0	1
	Light	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	0
	Blue (63)	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1

AND Displays

PC-TFT-050VL
Interface Board

Features
· Used for TFT-LCD display: 5" AND050VL-LED
· Input Signal: D-SUB VGA signal, composite video channels and S-Video
· Auto detect input signal when power is on
· Operating Temperature: 0ºC ~ 60ºC
· Storage Temperature: -20ºC ~ 80ºC
· **RoHS Compliant**

The PC-TFT-050VL is designed to work with the AND050VL-LED color TFT display which is suitable for security, video game, door phone, video phone, portable TV and instrument display applications..

Mechanical Characteristics for Board

Item	Specification	Unit
Outline Dimension	113 (W) x 68(H) x 15.7 (D)	mm
Top Layer Height (max)	12	mm
Board thickness	1.2	mm
Four Screw Holes	ϕ 2.5	mm

Absolute Maximum Rating

Item	Symbol	Conditions	Min.	Max.	Unit
Operating Temperature	Top	–	0	60	°C
Storage Temperature	Tstg	–	-20	80	°C

Input/Output Terminals - CON6
LVDS Connector: MOLEX 87758-32 or compatible

Pin No.	Symbol	Pin No.	Symbol	Pin No.	Symbol	Pin No.	Symbol	Pin No.	Symbol
1	DA0-	8	CLK1-	15	DA5-	22	DA7-	29	VCC
2	DA0+	9	CLK1+	16	DA5+	23	DA7+	30	VCC
3	DA1-	10	DA3-	17	GND	24	GND	31	VCC
4	DA1+	11	DA3+	18	DA6-	25	GND	32	VCC
5	DA2-	12	DA4-	19	DA6+	26	GND		
6	DA2+	13	DA4+	20	CLK2-	27	GND		
7	GND	14	GND	21	CLK2+	28	VCC		

Input/Output Terminals - CON3
VGA Connector: JST B12B-PH-K-S or compatible

Pin No.	Symbol	Pin No.	Symbol
1	R+	9	VGA-POWER
2	G+	10	GND
3	B+	11	NC
4	NC	12	SDA-VGA
5	VGA-DET	13	IN-HS
6	GND	14	IN-VS
7	GND	15	SCL-VGA
8	GND		

Input/Output Terminals - CON11
Keyboard Operation Port: MOLEX 53261-1071 or compatible

Pin No.	Symbol	Pin No.	Symbol
1	Auto	6	+3.3V
2	Right	7	GND
3	Left	8	Remote
4	Menu	9	LED-Green
5	Power	10	LED-Red

Input/Output Terminals - CON1
Power Connector: JST B2B-XH-A or compatible

Pin No.	Symbol	Pin No.	Symbol
1	GND	2	+12V

Electrical

Symbol	Conditions	Input/Output	Min.	Typ.	Max.	Unit
Vin	DC (+V)		12	12	15	V
Iin	DC (+12V)	Input	–	TBD	–	mA
Pin			–	TBD	–	W

Input/Output Terminals - CON7
TTL Connector: MOLEX 87758-30 or compatible

Pin No.	Symbol	Pin No.	Symbol	Pin No.	Symbol	Pin No.	Symbol	Pin No.	Symbol
1	CLK	7	R2	13	G1	19	E0	25	GND
2	HS	8	R3	14	G2	20	B1	26	DEN
3	VS	9	R4	15	G3	21	B2	27	VCC
4	GND	10	R5	16	G4	22	B3	28	VCC
5	R0	11	GND	17	G5	23	B4	29	L/R
6	R1	12	G0	18	GND	24	B5	30	U/D

Input/Output Terminals - CON2
Audio In Connector:JST B4B-XH-A
or compatible

Pin No.	Symbol	Pin No.	Symbol
1	GND	3	GND
2	L-IN	4	R-IN

Input/Output Terminals - CON8
Video & S-Video Connector: JST-B5B-PH-K-S or compatible

Pin No.	Symbol	Pin No.	Symbol
1	GND	4	Y
2	Video	5	C
3	GND		

Driver Board Outline Drawing
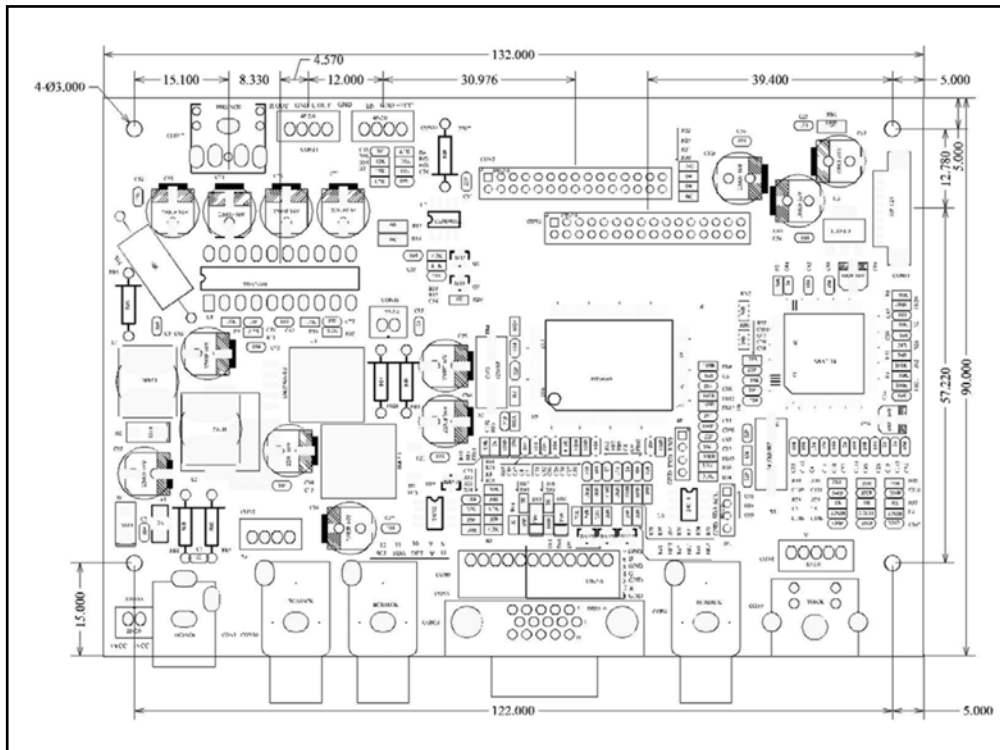
Input/Output Terminals - CON13
Audio In Connector

Pin No.	Symbol
1	R-IN
2	GND

Input/Output Terminals - CON10
Audio In Connector

Pin No.	Symbol
1	L-IN
2	GND

Driver Board
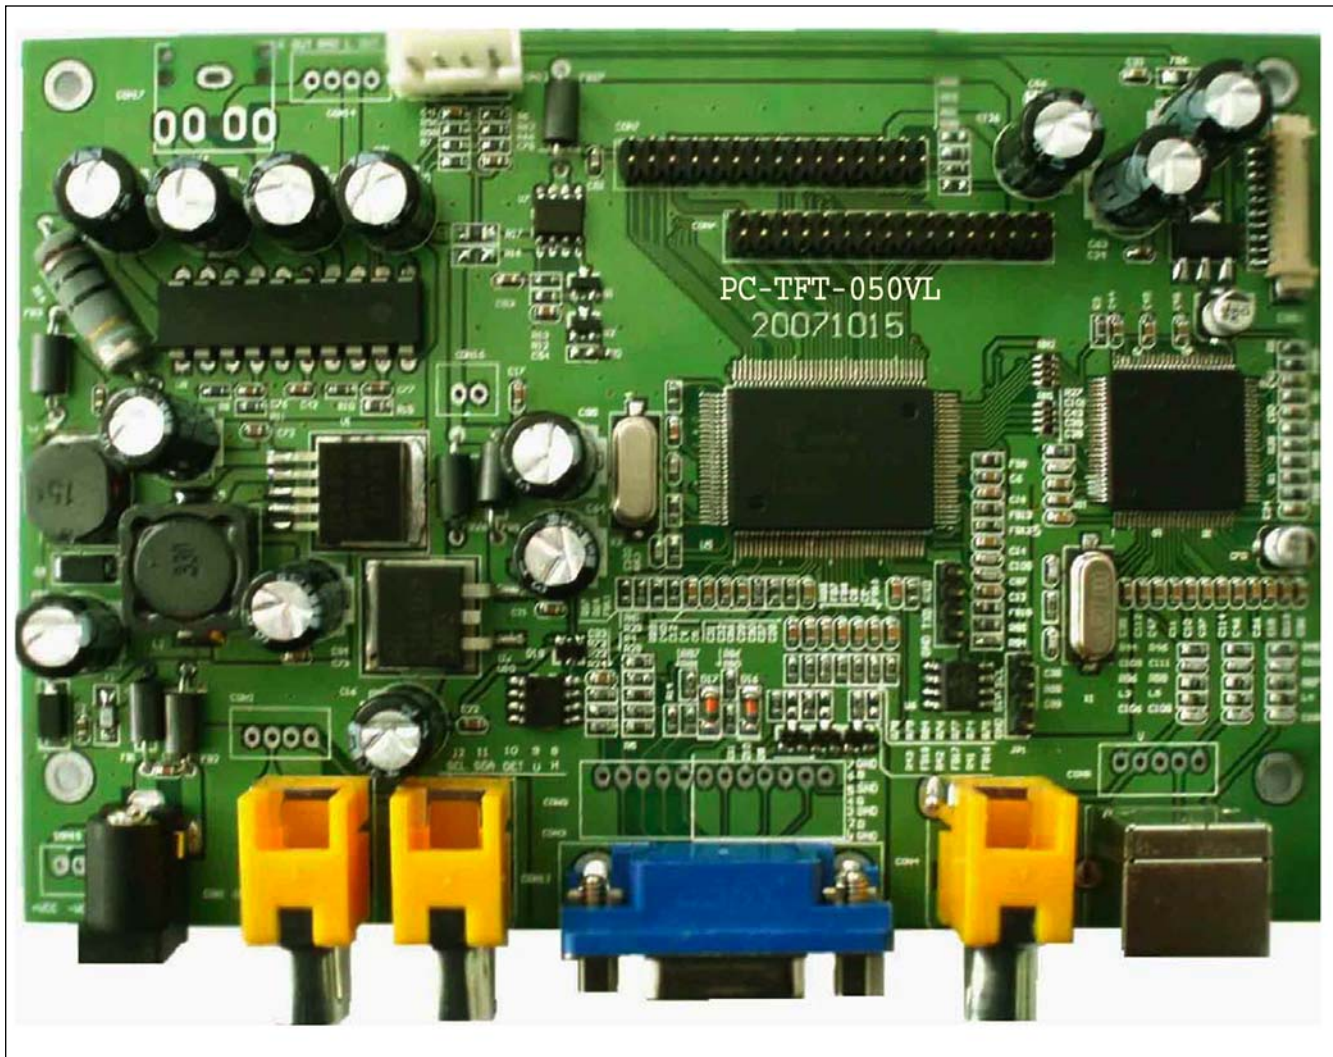
Driver Board Introduction

Port	Definition
CON7	Connect port of driver board with LCD Connector (TTL)
CON6	Connect port of driver board with LCD Connector (LVDS)
CON3	Analog VGA signal input port (15 pin)
CON9	Analog VGA signal input port (12 pin)
CON11	Keyboard operation port
CON1	Power input port (DC +12V)

Port	Definition
CON8	Composite video or S-video input port
CON5	S-video input port
CON4	Composite video input port
CON10	Connection port of audio in
CON13	Connection port of audio in
CON2	Connection port of audio in

05/13/03

Purdy Electronics Corporation • 720 Palomar Avenue • Sunnyvale, CA 94085
Tel: 408.523.8200 • Fax: 408.733.1287 • sales@purdyelectronics.com • www.purdyelectronics.com

12