



## PO117-24D-4B-2

## PO117-48D-4B-2

### Features

Size:	120 x 120 x 38 mm (4.7" x 4.7" x 1.5")
Airflow:	120 CFM
Weight:	260 grams (8.8-9.2 oz)
Lead Wire:	AWG24 (UL1007, CSA TR-64)
Impeller/Frame:	Reinforced Plastic (UL94V-0)
Bearings:	Sealed Ball




UL pending




CSA pending

### Dimensions – inches mm

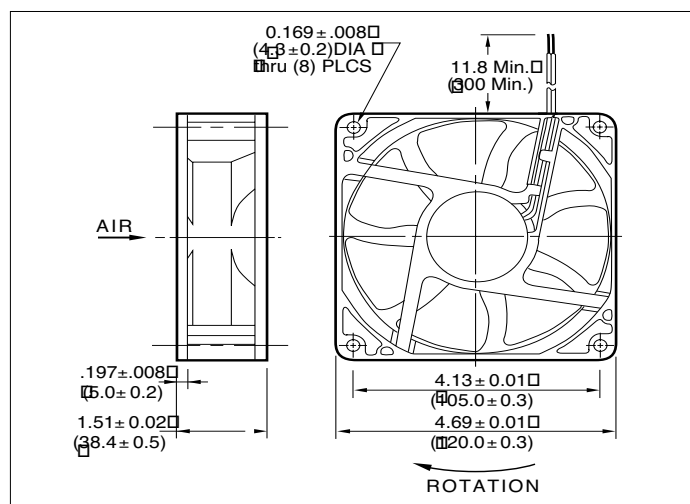

### Air Flow vs Air Pressure

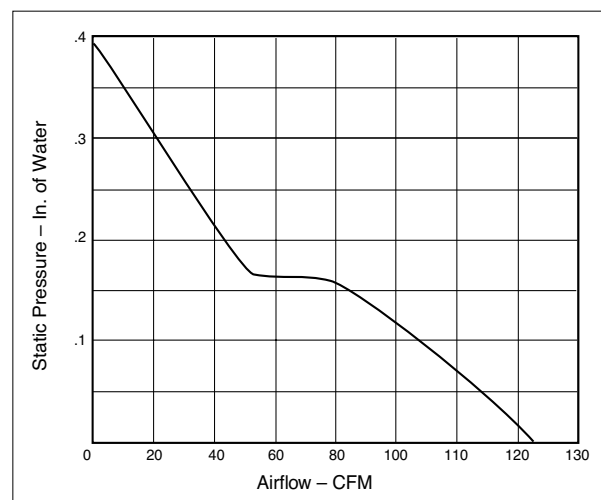

### Performance

Type	Rated Voltage (V)	Rated Current (A)		Max Air Flow (CFM)	Max Air Pressure (In H <sub>2</sub> O)	Noise* (dBA)	Operating Voltage (V)	Operating Temp. (°C)	Life Expectancy (Hr) (@ 25°C ±20°)
		Locked	Moved						
PO117-24D-4B-2	24	1.50	0.45	120	0.38	49	20.4~27.6	-20 ~ +60	60,000
PO117-48D-4B-2	48	0.47	0.24	120	0.38	49	22~55.2	-20 ~ +60	60,000

\*Measured 1 m from intake

Product specifications contained herein may be changed without prior notice.

It is therefore advisable to contact Purdy Electronics before proceeding with the design of equipment incorporating this product.