

Cisco 642-627



Implementing Cisco Intrusion Prevention System v7.0

Version: 5.0

QUESTION NO: 1

Which three are global correlation network participation modes? (Choose three.)

- A. off
- B. partial participation
- C. reputation filtering
- D. detect
- E. full participation
- F. learning

Answer: A,B,E

Explanation:

QUESTION NO: 2 DRAG DROP

Click and drag the Cisco IPS module on the left to the correct device that it supports on the right.

AIP-SSM	ISR
IDSM-2	ASA 5520
IPS AIM or IPS NME	Catalyst 6500
AIP-SSC	ASA 5505

Answer:

Click and drag the Cisco IPS module on the left to the correct device that it supports on the right.

AIP-SSM	IPS AIM or IPS NME
IDSM-2	AIP-SSM
IPS AIM or IPS NME	IDSM-2
AIP-SSC	AIP-SSC

Explanation:

IPS AIM or IPS NME
AIP-SSM
IDSM-2
AIP-SSC

QUESTION NO: 3

What are four properties of an IPS signature? (Choose four.)

- A. reputation rating
- B. fidelity rating
- C. summarization strategy
- D. signature engine
- E. global correlation mode
- F. signature ID and signature status

Answer: B,C,D,F

Explanation:

QUESTION NO: 4

The custom signature ID of a Cisco IPS appliance has which range of values?

- A. 10000 to 19999
- B. 20000 to 29999
- C. 50000 to 59999
- D. 60000 to 65000
- E. 80000 to 90000
- F. 1 to 20000

Answer: D

Explanation:

QUESTION NO: 5

When upgrading a Cisco IPS AIM or IPS NME using manual upgrade, what must be performed before installing the upgrade?

- A. Disable the heartbeat reset on the router.
- B. Enable fail-open IPS mode.
- C. Enable the Router Blade Configuration Protocol.
- D. Gracefully halt the operating system on the Cisco IPS AIM or IPS NME.

Answer: A

Explanation:

QUESTION NO: 6

Which Cisco IPS NME interface is visible to the NME module but not visible in the router configuration and acts as the sensing interface of the NME module?

- A. ids-sensor 0/1 interface
- B. ids-sensor 1/0 interface
- C. gigabitEthernet 0/1
- D. gigabitEthernet 1/0
- E. management 0/1
- F. management 1/0

Answer: C

Explanation:

QUESTION NO: 7

Which two methods can be used together to configure a Cisco IPS signature set into detection mode when tuning the Cisco IPS appliance to reduce false positives? (Choose two.)

- A. Subtract all aggressive actions using event action filters.
- B. Enable anomaly detection learning mode.
- C. Enable verbose alerts using event action overrides.
- D. Decrease the number of events required to trigger the signature.
- E. Increase the maximum inter-event interval of the signature.

Answer: A,E

Explanation:

QUESTION NO: 8

In which CLI configuration mode is the Cisco IPS appliance management IP address configured?

- A. global configuration
ips(config)#

- B.** service network-access
ips(config-net)#
- C.** service host network-settings
ips(config-hos-net)#
- D.** service interface
ips(config-int)#

Answer: C

Explanation:

QUESTION NO: 9

Which four parameters are used to configure how often the Cisco IPS appliance generates alerts when a signature is firing? (Choose four.)

- A.** summary mode
- B.** summary interval
- C.** event count key
- D.** global summary threshold
- E.** summary key
- F.** event count
- G.** summary count
- H.** event alert mode

Answer: A,B,D,F

Explanation:

QUESTION NO: 10

Which three Cisco IPS cross-launch capabilities do Cisco Security Manager and Cisco Security MARS support? (Choose three.)

- A.** Edit IPS signatures in Cisco Security Manager from a Cisco Security MARS query.
- B.** Create custom signatures in Cisco Security Manager from a Cisco Security MARS query.
- C.** Create event action filters in Cisco Security Manager from a Cisco Security MARS query.
- D.** Create a Cisco Security MARS drop rule from Cisco Security Manager policy.
- E.** Create a Cisco Security MARS user inspection rule from Cisco Security Manager policy.
- F.** Query Cisco Security MARS from Cisco Security Manager policy.

Answer: C,E,F

Explanation:

QUESTION NO: 11

Which statement about inline VLAN pair deployment with the Cisco IPS 4200 Series appliance is true?

- A.** The sensing interface acts as an 802.1q trunk port, and the Cisco IPS appliance performs VLAN translation between pairs of VLANs.
- B.** The Cisco IPS appliance connects to two physically distinct switches using two paired physical interfaces.
- C.** Two sensing interfaces connect to the same switch that forwards traffic between two VLANs.
- D.** The pair of sensing interfaces can be selectively divided (virtualized) into multiple logical "wires" by VLANs that can be analyzed separately

Answer: A

Explanation:

QUESTION NO: 12

Which four statements about Cisco IPS appliance anomaly detection histograms are true? (Choose four.)

- A.** Histograms are learned or configured manually.
- B.** Destination IP address row is the same for all histograms.
- C.** Source IP address row can be learned or configured.
- D.** Anomaly detection only builds a single histogram for all services in a zone.
- E.** You can enable a separate histogram and scanner threshold for specific services, or use the default one for all other services
- F.** Anomaly detection histograms only track source (attacker) IP addresses.

Answer: A,B,C,E

Explanation:

QUESTION NO: 13

You are working with Cisco TAC to troubleshoot a software problem on the Cisco IPS appliance. TAC suspects a fault with the NotificationApp software module in the Cisco IPS appliance. In this case, which Cisco IPS appliance operations may be most affected by the NotificationApp software module fault?

- A. SNMP
- B. IDM or IME
- C. global correlation
- D. remote blocking
- E. anomaly detection
- F. SDEE

Answer: A

Explanation:

QUESTION NO: 14

Which two switching-based mechanisms are used to deploy high availability IPS using multiple Cisco IPS appliances? (Choose two.)

- A. Spanning Tree-based HA
- B. HSRP-based HA
- C. EtherChannel-based HA
- D. VRRP-based HA

Answer: A,C

Explanation:

QUESTION NO: 15

Which statement about the 4-port GigabitEthernet card with hardware bypass is true?

- A. Hardware bypass only works with inline interface pairs.
- B. Hardware bypass is only supported on the Cisco IPS 4270 appliance.
- C. Hardware bypass is independent from software bypass.
- D. Hardware bypass is enabled if software bypass is configured to "OFF".
- E. Hardware bypass is supported between any of the four GigabitEthernet ports

Answer: A

Explanation:

QUESTION NO: 16 DRAG DROP

Click and drag the rating or weight on the left to the correct description on the right.

SFR

indicates how accurately the signature detects the event

ASR

associated with the relevancy of the targeted OS

TVR

associated with the severity of a successful exploit of the vulnerability

ARR

associated with the perceived value of the target

PD

value subtracted from the overall RR

WLR

associated with the Management Center for Cisco Security Agent

Answer:

Click and drag the rating or weight on the left to the correct description on the right.

SFR

SFR

ASR

ARR

TVR

ASR

ARR

TVR

PD

PD

WLR

WLR

Explanation:

SFR

ARR

ASR

TVR

PD

WLR

QUESTION NO: 17

What is the correct regular expression to match a URI request equal to /test.exe?

- A. /test.exe
- B. \test\.exe
- C. /test\.exe
- D. */test\.exe
- E. */test\.exe
- F. */test.exe

Answer: C

Explanation:

QUESTION NO: 18

Which four types of interface modes are available on the Cisco IPS 4200 Series appliance? (Choose four.)

- A. promiscuous
- B. inline TAP
- C. inline interface
- D. inline VLAN pair
- E. VLAN groups
- F. bypass

Answer: A,C,D,E

Explanation:

QUESTION NO: 19

Which option is best to use to capture only a subset of traffic (capturing traffic per-IP-address, per-protocol, or per-application) off the switch backplane and copy it to the Cisco IPS appliance?

- A. SPAN
- B. PBR
- C. VACL
- D. MPF

E. STP

Answer: C

Explanation:

QUESTION NO: 20

Refer to the exhibit. Which statement is true?

Name	Value
Signature Definition	
☐ Signature ID	3108
☐ SubSignature ID	0
☐ Alert Severity	High
☐ Sig Fidelity Rating	85
☐ Promiscuous Delta	10
Sig Description	
☐ Signature Name	SMTP MIME Content Overflow
☐ Alert Notes	
☐ User Comments	
☐ Alert Traits	0
☐ Release	52
☐ Signature Creation Date	20010202
☐ Signature Type	Vulnerability
Engine	State
☐ Event Action	Produce Alert
☐ State Machine	SMTP
☐ State Name	Mail Header
☐ Specify Min Match Length	Yes
☐ Min Match Length	200
☐ Regex String	[Cc][Oo][Nn][Tt][Ee][Nn][Tt][-].*\n
☐ Direction	To Service
☐ Service Ports	25-25
☐ Swap Attacker Victim	No
☐ Specify Exact Match Offset	No
☐ Specify Max Match Offset	No
☐ Specify Min Match Offset	No
Event Counter	
☒ Event Count	3
☐ Event Count Key	Attacker and victim addresses and ports
☒ Specify Alert Interval	Yes
☐ Alert Interval	60
Alert Frequency	
☐ Summary Mode	Fire Once
☐ Summary Key	Attacker and victim addresses and ports
☐ Specify Global Summary Threshold	No
Status	
☒ Enabled	Yes
☐ Retired	Yes
☐ Obsoletes	(Click to view or edit the details)
☐ Vulnerable OS List	Windows NT/2K/XP

- A. A summary alert is sent once during each interval for each unique Summary Key entry.
- B. An alert is generated each time the signature triggers.
- C. This signature does not fire until three events are seen during 60 seconds with the same attacker and victim IP addresses and ports

- D. This signature is disabled by default.
- E. When this signature triggers, the Cisco IPS appliance sends an SNMP trap for this event.

Answer: C

Explanation:

QUESTION NO: 21

What are the three anomaly detection modes? (Choose three.)

- A. detect
- B. active
- C. inactive
- D. learn
- E. full
- F. partial

Answer: A,C,D

Explanation:

QUESTION NO: 22

Which type of signature engine is best suited for creating custom signatures that inspect data at OSI Layer 5 and above?

- A. Atomic
- B. String
- C. Sweep
- D. Service
- E. Meta
- F. Flood

Answer: D

Explanation:

QUESTION NO: 23 DRAG DROP

Choose the IPS product to deploy based on the performance requirement. Click and drag the maximum throughput on the left to the correct Cisco IPS model on the right. Not all options on the left are used.

45 MBPS	IPS 4270
75 MBPS	IPS 4255
225 MBPS	AIP-SSM-10
300 MBPS	AIP-SSM-40
500 MBPS	AIP-SSC-5 or IPS NME
600 MBPS	IPS AIM
650 MBPS	
2 GBPS	
4 GBPS	

Answer:

Choose the IPS product to deploy based on the performance requirement. Click and drag the maximum throughput on the left to the correct Cisco IPS model on the right. Not all options on the left are used.

45 MBPS	4 GBPS
75 MBPS	600 MBPS
225 MBPS	225 MBPS
300 MBPS	650 MBPS
500 MBPS	75 MBPS
600 MBPS	45 MBPS
650 MBPS	
2 GBPS	
4 GBPS	

Explanation:

4Gbps
600Mbps
225Mbps
650Mbps
75Mbps
45Mbps

QUESTION NO: 24

A Cisco Catalyst switch is experiencing packet drops on a SPAN destination port that is connected to an Cisco IPS appliance. Which three configurations should be considered to resolve the packet drops issue? (Choose three.)

- A.** Configure an additional SPAN session to a different Cisco IPS appliance interface connected to the same virtual sensor
- B.** Configure an EtherChannel bundle as the SPAN destination port.
- C.** Configure RSPAN.
- D.** Configure VACL capture.
- E.** Configure the Cisco IPS appliance to inline mode.

Answer: A,B,D

Explanation:

QUESTION NO: 25 DRAG DROP

Click and drag the Cisco ISDM-2 port on the left to its function on the right. Not all options on the left are used.

port 1	TCP resets
port 2	command and control
port 3	sensing
port 3 and 4	
port 5 and 6	
port 7 and 8	

Answer:

Click and drag the Cisco ISDM-2 port on the left to its function on the right. Not all options on the left are used.

port 1	port 1
port 2	port 2
port 3	port 7 and 8
port 3 and 4	
port 5 and 6	
port 7 and 8	

Explanation:

Here is an explanation and reference link:

IDSM-2

The IDSM-2 Module is a Cisco IDS blade for the Cisco 6500 switch. Once you install the module into the switch the module uses following logical ports:

Port 1	Used for TCP Resets (In Promiscuous Mode)
--------	---

Port 2	Command and Control
--------	---------------------

Port 7	Sensing Port
--------	--------------

Port 8	Sensing Port
--------	--------------

untitled

<http://www.fir3net.com/IDS/Cisco/configuting-the-cisco-ids-router-switch-modules.html>

QUESTION NO: 26

Which signature action should be selected to cause the attacker's traffic flow to terminate when the Cisco IPS appliance is operating in promiscuous mode?

- A. deny connection
- B. deny attacker
- C. reset TCP connection
- D. deny packet, reset TCP connection
- E. deny connection, reset TCP connection

Answer: C

Explanation:

QUESTION NO: 27 DRAG DROP

Click and drag the IPS deployment mode on the left to the correct description on the right.

inline interface pair

Inspect all traffic between two network domains using a single LAN switch.

inline VLAN pairs

A pair of sensing interfaces can be virtualized into multiple logical sensors that can be analyzed separately.

inline VLAN groups

Supported on Cisco ASA AIP-SSM, IPS AIM, and IPS NME modules.

selective inline analysis

Physical separation between networks is desired and all traffic should be analyzed.

promiscuous mode

Can use a hub or a network tap to copy network traffic to a sensing interface of the Cisco IPS sensor.

Answer:

Click and drag the IPS deployment mode on the left to the correct description on the right.

inline interface pair

inline VLAN pairs

inline VLAN pairs

inline VLAN groups

inline VLAN groups

selective inline analysis

selective inline analysis

inline interface pair

promiscuous mode

promiscuous mode

Explanation:

Inline VLAN pairs
inline VLAN groups
selective inline analysis
inline interface pair
promiscuous mode

QUESTION NO: 28

During Cisco IPS appliance troubleshooting, you notice that all the signatures are set to Fire All. What can cause this situation to occur?

- A. A new signature engine update package has been loaded to the Cisco IPS appliance.
- B. A new signature/virus update package has been loaded to the Cisco IPS appliance.
- C. Summarizer has been disabled globally.
- D. All the signatures have been set to the default state.
- E. All the signatures have been retired, and then unretired.

Answer: C

Explanation:

QUESTION NO: 29

From which three sources does the Cisco IPS appliance obtain OS mapping information? (Choose three.)

- A. from manually configured OS mappings
- B. imported OS mappings from Management Center for Cisco Security Agent
- C. imported OS mappings from Cisco Security Manager
- D. learned OS mappings from passive OS fingerprinting
- E. learned OS mappings from Cisco SensorBase input
- F. from Cisco IPS signature updates

Answer: A,B,D

Explanation:

QUESTION NO: 30


Which IPS alert action is available only in inline mode?

- A. produce verbose alert
- B. request rate limit
- C. reset TCP connection
- D. log attacker/victim pair packets
- E. deny-packet-inline
- F. request block connection

Answer: E

Explanation:

QUESTION NO: 31

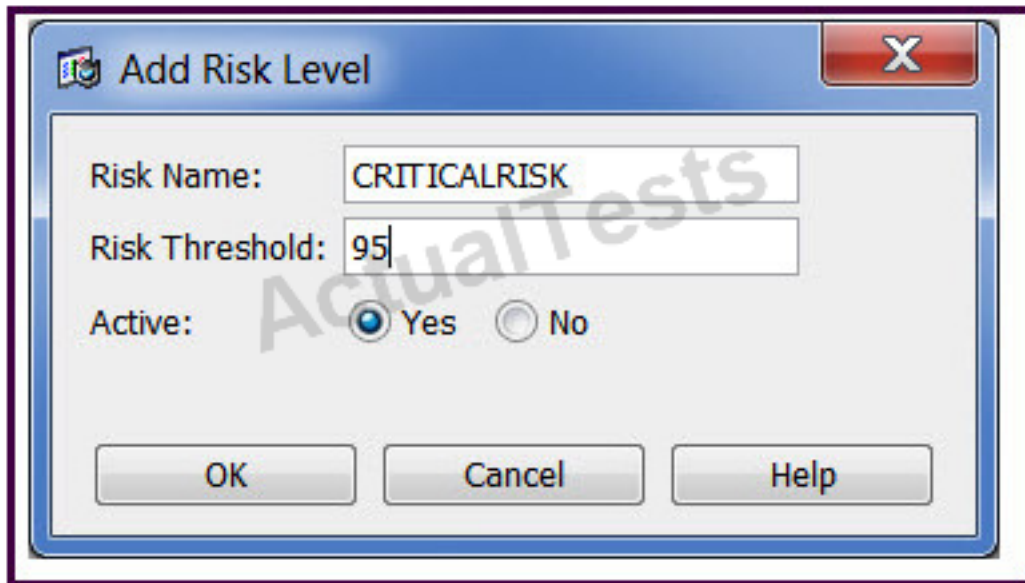

The screenshot shows a Windows-style dialog box titled "Add Risk Level". It contains the following fields and controls:

- Risk Name:** A text box containing the value "CRITICALRISK".
- Risk Threshold:** A text box containing the value "95".
- Active:** Two radio buttons, "Yes" (which is selected) and "No".
- Buttons:** Three buttons at the bottom: "OK", "Cancel", and "Help".

Refer to the exhibit. What does the Risk Threshold setting of 95 specify?

- A. the low risk rating threshold
- B. the low threat rating threshold
- C. the low target value rating threshold
- D. the high risk rating threshold
- E. the high threat rating threshold
- F. the high target value rating threshold

Answer: D

Explanation:

QUESTION NO: 32

From the Cisco IPS appliance CLI setup command, one of the options is "Modify default threat prevention settings? [no]". What is this option related to?

- A. anomaly detection
- B. threat rating adjustment
- C. event action override that denies high-risk network traffic with a risk rating of 90 to 100

- D. risk rating adjustment with global correlation
- E. reputation filters

Answer: C

Explanation:

QUESTION NO: 33

In Cisco IDM, the Configuration > Sensor Setup > SSH > Known Host Keys screen is used for what purpose?

- A. to enable the Cisco IPS appliance as a master blocking sensor
- B. to enable management hosts to access the Cisco IPS appliance
- C. to regenerate the Cisco IPS appliance SSH host key
- D. to regenerate the Cisco IPS appliance SSL RSA key pair
- E. to enable communications with a blocking device

Answer: E

Explanation:

QUESTION NO: 34 DRAG DROP

Click and drag the address key type on the left to the correct description on the right. Not all options on the left are used.

AAAA	attacker address
BBBB	victim address
xAxB	attacker and victim addresses
AxBx	global
Axxx	
Bxxx	
xxBx	
xxxx	

Answer:

Click and drag the address key type on the left to the correct description on the right. Not all options on the left are used.

AAAA	Axxx
BBBB	xxBx
xAxB	AxBx
AxBx	xxxx
Axxx	
Bxxx	
xxBx	
xxxx	

Explanation:

Axxx

xxBx

AxBx

xxxx

QUESTION NO: 35

Which configuration is required when setting up the initial configuration on the Cisco ASA 5505 to support the Cisco ASA AIP-SSC?

- A. Configure a VLAN interface as a management interface to access the Cisco ASA AIP-SSC.
- B. Using MPF, configure which virtual sensor to use.
- C. Configure a management access rule to allow Cisco ASDM access from the Cisco ASA AIP-SSC management interface IP address.
- D. Configure a management access rule to allow SSH access from the Cisco ASA AIP-SSC management interface IP address.

Answer: A

Explanation:

QUESTION NO: 36

The Cisco IPS appliance risk category is used with which other feature?

- A. anomaly detection
- B. event action overrides
- C. global correlation
- D. reputation filter

Answer: B

Explanation:

QUESTION NO: 37

Which two Cisco IPS modules support sensor virtualization? (Choose two.)

- A. AIP-SSM
- B. AIP-SSC
- C. IPS AIM
- D. IPS NME
- E. IDSM-2

Answer: A,E

Explanation:

QUESTION NO: 38

You are working with Cisco TAC to troubleshoot a software problem on the Cisco IPS appliance. TAC suspects a fault with the ARC software module in the Cisco IPS appliance. In this case, which Cisco IPS appliance operations may be most affected by the ARC software module fault?

- A. SDEE
- B. global correlation
- C. anomaly detection
- D. remote blocking
- E. virtual sensor
- F. OS fingerprinting

Answer: D

Explanation:

QUESTION NO: 39

Threat rating calculation is performed based on which factors?

- A. risk rating and adjustment based on the prevention actions taken
- B. threat rating and event action overrides
- C. event action overrides and event action filters
- D. risk rating and target value rating
- E. alert severity and alert actions

Answer: A

Explanation:

QUESTION NO: 40

Refer to the exhibit.

<i>Histogram</i>			
<i>Number of source IP addresses</i>	<i>10</i>	<i>5</i>	<i>2</i>
<i>Number of destination IP addresses</i>	<i>5</i>	<i>20</i>	<i>100</i>

The scanner threshold is set to 120. Which two statements about this histogram are true? (Choose two.)

- A. From a single source you do not expect to see nonestablished connections to more than 120 different destination IP addresses.
- B. From a single source you do not expect to see nonestablished connections to more than 100 different destination IP addresses.
- C. You do not expect to see more than 5 sources generate nonestablished connections to 10 or more different destinations.
- D. You do not expect to see more than 10 sources generate nonestablished connections to 5 or more different destinations.
- E. A scanner threshold of 120 is not a valid value for this histogram.
- F. Scanning attacks will not be triggered, because the scanner threshold is higher than the maximum number of destination IP addresses in the histogram.
- G. Scanning attacks will not be triggered, because the scanner threshold is higher than the maximum number of source IP addresses in the histogram.

Answer: A,D

Explanation:

QUESTION NO: 41 DRAG DROP

Click and drag the IPS evasion methods on the left to the correct Cisco IPS anti-evasion features on the right.

encryption and tunneling	full-session reassembly in SERVICE engines
traffic substitution and insertion	data normalization in SERVICE engines
resource exhaustion	IP TTL validation and TCP checksum validation
timing attacks	configurable intervals
protocol-level misinterpretation	GRE tunnel inspection
traffic fragmentation	smart dynamic event summarization

Answer:

Click and drag the IPS evasion methods on the left to the correct Cisco IPS anti-evasion features on the right.

encryption and tunneling	traffic fragmentation
traffic substitution and insertion	protocol-level misinterpretation
resource exhaustion	traffic substitution and insertion
timing attacks	timing attacks
protocol-level misinterpretation	encryption and tunneling
traffic fragmentation	resource exhaustion

Explanation:

Traffic fragmentation
 Protocol-level misinterpretation
 Traffic substitution and insertion
 Timing attacks
 encryption and tunneling
 resource exhaustion

QUESTION NO: 42

On the Cisco IPS appliance, each virtual sensor can have its own instance of which three

parameters? (Choose three.)

- A. signature-definition
- B. event-action-rules
- C. global-correlation-rules
- D. anomaly-detection
- E. reputation-filters
- F. external-product-interfaces

Answer: A,B,D

Explanation:

QUESTION NO: 43 DRAG DROP

Click and drag the IPS terminology on the left to the correct description on the right.

false positive	A security control did not act because no malicious activity occurred.
false negative	A security control did not act when malicious activity occurred.
true positive	A security control acted when malicious activity occurred.
true negative	A security control acted when malicious activity did not occur.

Answer:

Click and drag the IPS terminology on the left to the correct description on the right.

false positive	true negative
false negative	false negative
true positive	true positive
true negative	false positive

Explanation:

True negative

False negative

true positive

false positive

QUESTION NO: 44

Refer to the exhibit. What happens when you click the Cisco Security MARS icon on the Cisco Security MARS query result screen?



- A. Cross-launch Cisco Security Manager to link the Cisco Security MARS event back to the IPS signature and policy within the Cisco Security Manager that triggered it.
- B. Cross-launch Cisco IDM so the signature that triggered it can be examined.
- C. Cross-launch Cisco IDM to show the corresponding IPS alerts.
- D. Cross-launch Cisco Security Manager to show the corresponding IPS alerts.
- E. Cross-launch Cisco IME so the signature that triggered it can be examined.

Answer: A

Explanation:

QUESTION NO: 45

Which three statements about the Cisco IPS appliance normalizer feature are true? (Choose three.)

- A. only operates in inline modes
- B. ensures that Layer 4 to Layer 7 traffic conforms to the protocol specifications
- C. tracks session states and stops packets that do not fully match session state
- D. modifies ambiguously fragmented IP traffic
- E. cannot analyze asymmetric traffic flows

Answer: A,C,E

Explanation:

QUESTION NO: 46

Add Event Action Filter

Name: MY-FILTER

Enabled: ☒ Yes ☐ No

Signature ID: 2100

Subsignature ID: 0-255

Attacker IPv4 Address: 10.2.1.1

Attacker IPv6 Address: ::0-FFFF:FFFF:FFFF:FFFF:FFFF:FFFF:FFFF:FFFF

Attacker Port: 0-65535

Victim IPv4 Address: 0.0.0.0-255.255.255.255

Victim IPv6 Address: ::0-FFFF:FFFF:FFFF:FFFF:FFFF:FFFF:FFFF:FFFF

Victim Port: 0-65535

Risk Rating: 0 to 100

Actions to Subtract: Produce Alert

More Options

Active: ☒ Yes ☐ No

OS Relevance: Not Relevant
Relevant
Unknown

Deny Percentage: 100

Stop on Match: ☐ Yes ☒ No

Comments:

OK Cancel Help

Refer to the exhibit. What does the Deny Percentage setting affect?

- A. the percentage of the signatures to be tuned by the event action filter
- B. the percentage of the Risk Rating value to be tuned by the event action filter
- C. the percentage of packets to be denied for the deny attacker actions
- D. the percentage of the signatures to be tuned by the event action overrides

Answer: C

Explanation:

QUESTION NO: 47

Which protocol is used by Encapsulated Remote SPAN?

- A. ESP
- B. GRE
- C. TLS
- D. STP
- E. VTI
- F. 802.1Q

Answer: B

Explanation:

QUESTION NO: 48

In which three ways can you achieve better Cisco IPS appliance performance? (Choose three.)

- A. Place the Cisco IPS appliance behind a firewall.
- B. Disable unneeded signatures.
- C. Enable unidirectional capture.
- D. Have multiple Cisco IPS appliances in the path and configure them to detect different types of events
- E. Enable selective packet capture using VLAN ACL on the Cisco IPS 4200 Series appliance.
- F. Enable all anti-evasive measures to reduce noise.

Answer: A,B,F

Explanation:

QUESTION NO: 49

What must be configured to enable Cisco IPS appliance reputation filtering and global correlation?

- A. DNS server(s) IP address
- B. full sensor based network participation
- C. trusted hosts settings
- D. external product interfaces settings

Answer: A

Explanation:

QUESTION NO: 50

What is a best practice to follow before tuning a Cisco IPS signature?

- A. Disable all the alert actions on the signature to be tuned.
- B. Disable the signature to be tuned.
- C. Create a clone of the signature to be tuned.
- D. Increase the number of events required to trigger the signature to be tuned.
- E. Decrease the attention span (maximum inter-event interval) of the signature to be tuned

Answer: C

Explanation:

QUESTION NO: 51

Which three statements about the Cisco IntelliShield Alert Manager are true? (Choose three.)

- A. Alert information is analyzed and validated by Cisco security analysts.
- B. Alert analysis is vendor-neutral.
- C. The built-in workflow system provides a mechanism for tracking vulnerability remediation and integration with Cisco Security Manager and Cisco Security MARS.
- D. Users can customize the notification to deliver tailored information relevant to the needs of the organization
- E. Customers are automatically subscribed to use Cisco Security IntelliShield Alert Manager Service with the Cisco IPS license.
- F. More than 10 report types are available within the Cisco Security IntelliShield Alert Manager Service.

Answer: A,C,D

Explanation:

QUESTION NO: 52

Which two configurations are required on the Cisco IPS appliance to allow Cisco Security Manager to log into the Cisco IPS appliance? (Choose two.)

- A. Enable SNMPv2.

- B. Enable SSH access.
- C. Enable TLS/SSL to allow HTTPS access.
- D. Enable NTP.
- E. Enable Telnet access.
- F. Enable the IP address of the Cisco Security Manager server as an allowed host.

Answer: C,F

Explanation:

QUESTION NO: 53

The screenshot displays a web-based exam interface. On the left, a 'Questions' sidebar shows a vertical progress bar and a list of question numbers 1 through 6. Below the list, it indicates '0% Complete'. The main content area is divided into two sections: 'Instructions' and 'Scenario'. The 'Instructions' section contains text about window controls. The 'Scenario' section contains text about using Cisco IPS Device Manager (IDM). A large, semi-transparent watermark reading 'ActualTests' and 'CISCO' is overlaid on the center of the page. At the bottom, a navigation bar includes tabs for 'Instructions', 'Scenario', 'Topology', 'Questions', and 'Cisco IDM'.

Instructions

You can click the grey buttons at the bottom of this frame to view the different windows.

To minimize the window, click the [-]. To move the window, click the title bar and drag the window.

Scenario

Using Cisco IPS Device Manager (IDM), answer the multiple choice questions.

ActualTests
CISCO™

Instructions Scenario Topology Questions Cisco IDM

Scenario

You are the network security administrator responsible for operation and maintenance of your organization's Cisco IPS sensor appliance. You have noticed recent malicious activity that must be more closely monitored and you have configured custom parameter tuning to detect and mitigate this activity. You will be required to perform the following tasks:

- Event Action Overrides
 - Verify and enable this feature for the rules0 instance.
- Risk Category named MYCUSTOMRISK
 - Create a custom Risk Category named MYCUSTOMRISK.
 - Assign this category a risk threshold of 80.
 - Modify the new MYCUSTOMRISK category to take the following actions:
 - Deny Attacker Inline
 - Produce Alert
 - Reset TCP Connection
- Modify the Red Threat Threshold
 - Modify value to 80 to enable the new risk category to be included in the Red threshold level for network security health statistics alert threat categorization.
- Remember to save and apply all changes as needed

To access the Cisco IPS sensor, click the client PC to launch Cisco IDM.


- userID: cisco
- password: cisco123


Scenario

Topology

IDM

Topology

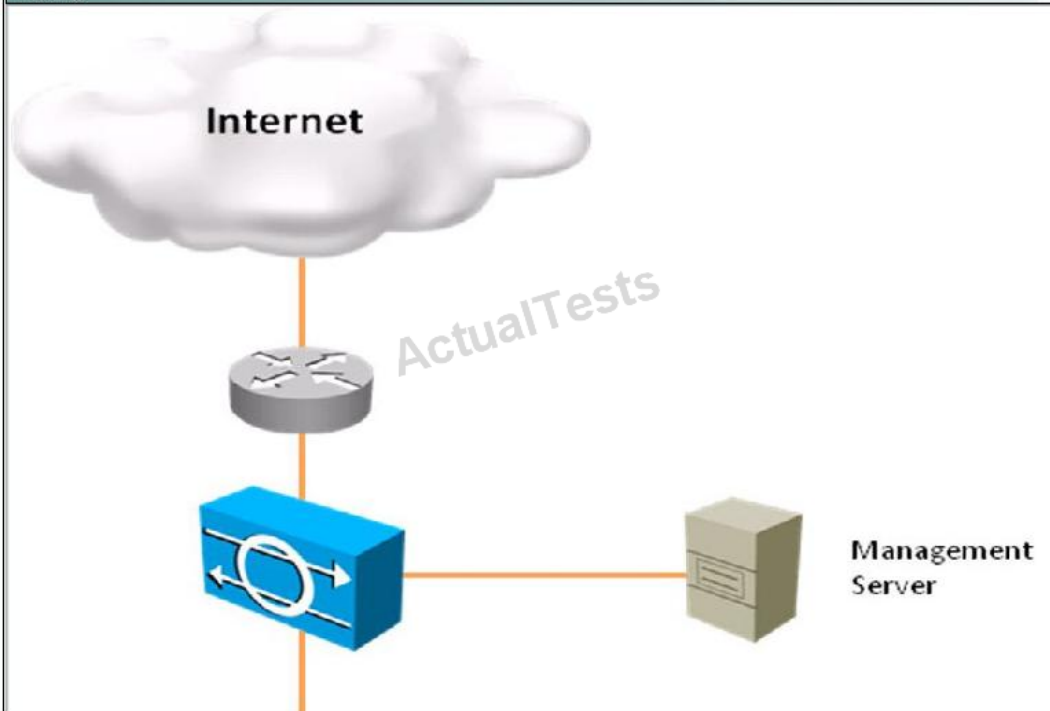

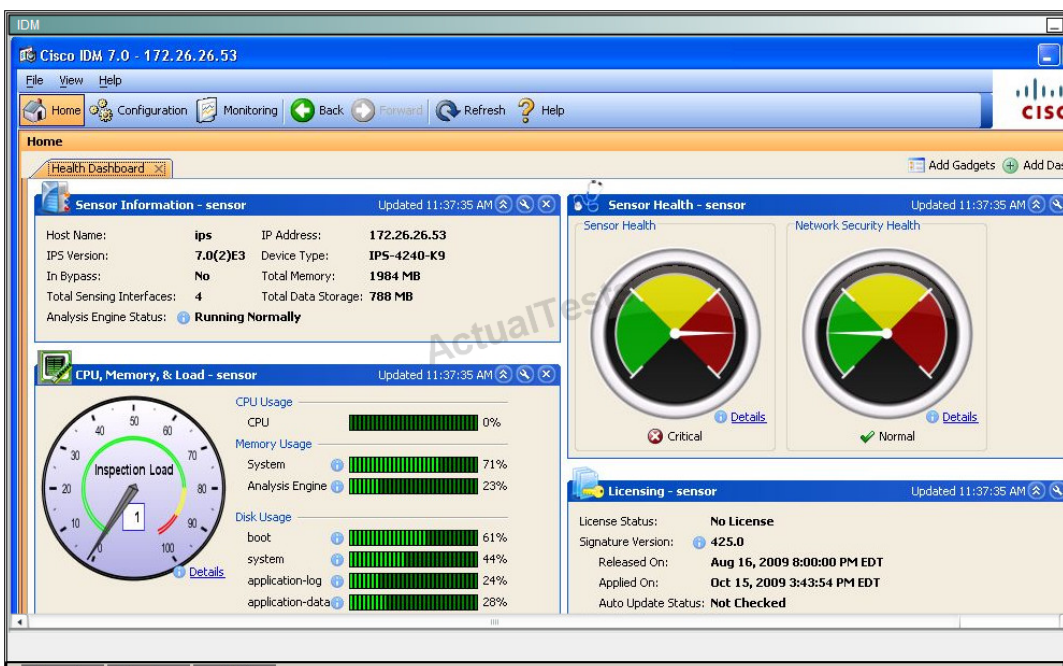

The screenshot shows the Cisco IDM 7.0 web interface. The left sidebar has a tree view with 'Network' selected. The main content area is titled 'Configuration > Sensor Setup > Network'. It contains a form for specifying network and communication parameters. The form includes fields for Hostname (ips), IP Address (172.26.26.53), Network Mask (255.255.255.0), Default Route (172.26.26.151), and FTP Timeout (300). There are also checkboxes for 'Allow Password Recovery' and 'Enable TLS/SSL' (checked). A 'Web server port' field is set to 443. On the right, there are fields for 'Http Proxy Server', 'Http Proxy Port', 'DNS Primary', 'DNS Secondary', and 'DNS Tertiary'. A 'Remote Access' section indicates that Telnet is disabled by default and has a checkbox for 'Enable Telnet'.

Configuration > Sensor Setup > Network

Specify the network and communication parameters for the sensor.
Global Correlation requires configuration of at least one DNS server or HTTP proxy server.

Hostname:

IP Address:

Network Mask:

Default Route:

FTP Timeout(seconds):

☒ Allow Password Recovery

Web Server Settings

☒ Enable TLS/SSL

Web server port:

DNS/Proxy Settings

Http Proxy Server:

Http Proxy Port:

DNS Primary:

DNS Secondary:

DNS Tertiary:

Remote Access

Telnet is not a secure access service and is disabled by default.

☒ Enable Telnet

The screenshot shows the Cisco IDM 7.0 web interface. The left sidebar has a tree view with 'Allowed Hosts/Networks' selected. The main content area is titled 'Configuration > Sensor Setup > Allowed Hosts/Networks'. It contains a table for specifying the addresses of all hosts or networks that have permission to access the sensor through the network. The table has two columns: 'IP Address' and 'Network Mask'. There are three rows of data: 172.16.0.0 with mask 255.255.0.0, 172.26.26.0 with mask 255.255.255.0, and 192.168.0.0 with mask 255.255.0.0.

Configuration > Sensor Setup > Allowed Hosts/Networks

Specify the addresses of all hosts or networks that have permission to access the sensor through the network.

IP Address	Network Mask
172.16.0.0	255.255.0.0
172.26.26.0	255.255.255.0
192.168.0.0	255.255.0.0

What is the status of OS Identification?

- A. It is only enabled to identify Cisco IOS" OS using statically mapped OS fingerprinting
- B. OS mapping information will not be used for Risk Rating calculations.
- C. It is configured to enable OS mapping and ARR only for the 10.0.0.0/24 network.
- D. It is enabled for passive OS fingerprinting for all networks.

Answer: A

Explanation:

QUESTION NO: 54

Questions

1

2

3

4

5

6

0% Complete

Instructions

You can click the grey buttons at the bottom of this frame to view the different windows.
To minimize the window, click the [-]. To move the window, click the title bar and drag the window.

Scenario

Using Cisco IPS Device Manager (IDM), answer the multiple choice questions.

Instructions

Scenario

Topology

Questions

Cisco IDM

Scenario

You are the network security administrator responsible for operation and maintenance of your organization's Cisco IPS sensor appliance. You have noticed recent malicious activity that must be more closely monitored and you have configured custom parameter tuning to detect and mitigate this activity. You will be required to perform the following tasks:

- Event Action Overrides
 - Verify and enable this feature for the rules0 instance.
- Risk Category named MYCUSTOMRISK
 - Create a custom Risk Category named MYCUSTOMRISK.
 - Assign this category a risk threshold of 80.
 - Modify the new MYCUSTOMRISK category to take the following actions:
 - Deny Attacker Inline
 - Produce Alert
 - Reset TCP Connection
- Modify the Red Threat Threshold
 - Modify value to 80 to enable the new risk category to be included in the Red threshold level for network security health statistics alert threat categorization.
- Remember to save and apply all changes as needed


To access the Cisco IPS sensor, click the client PC to launch Cisco IDM.




- userID: cisco
- password: cisco123


Scenario

Topology

IDM

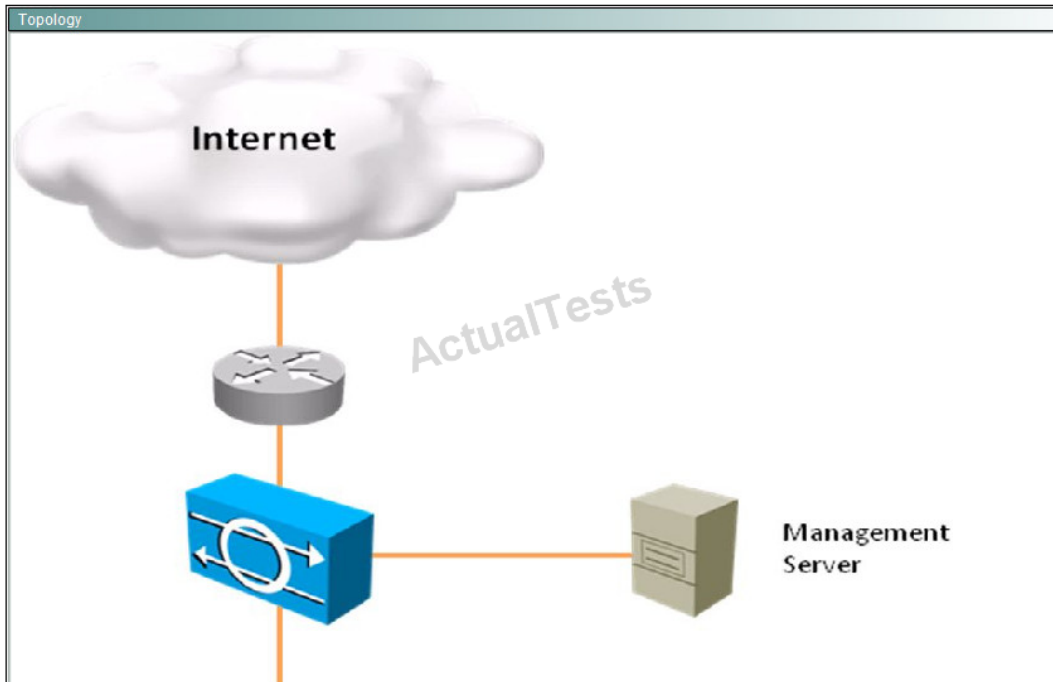

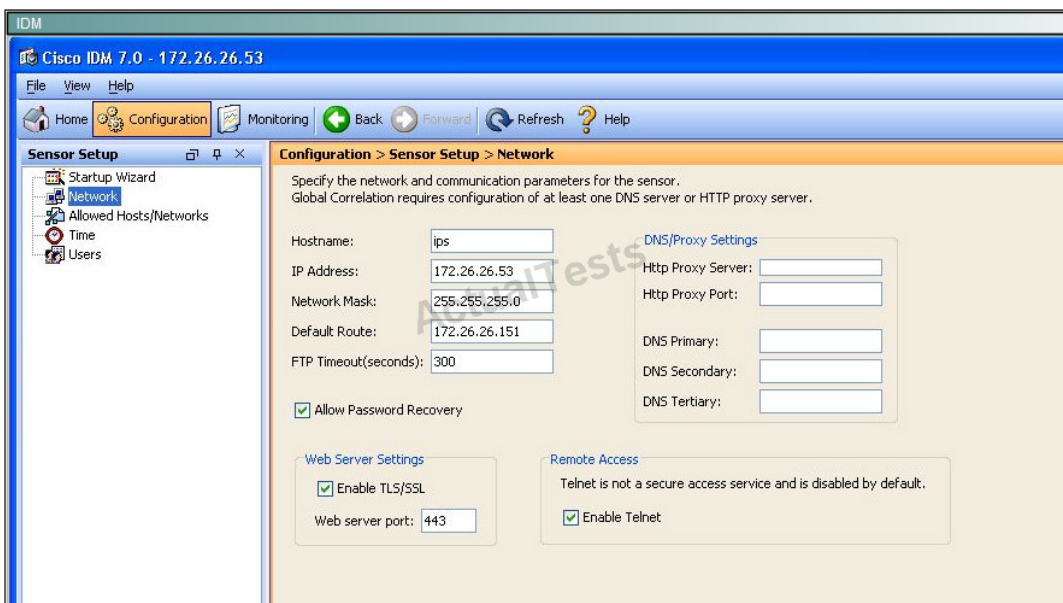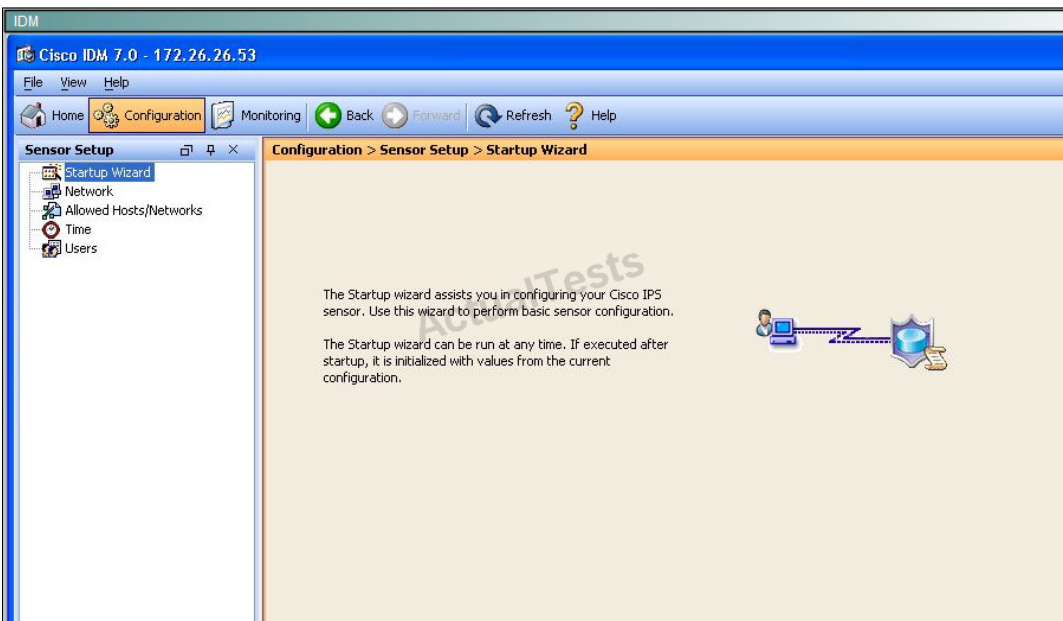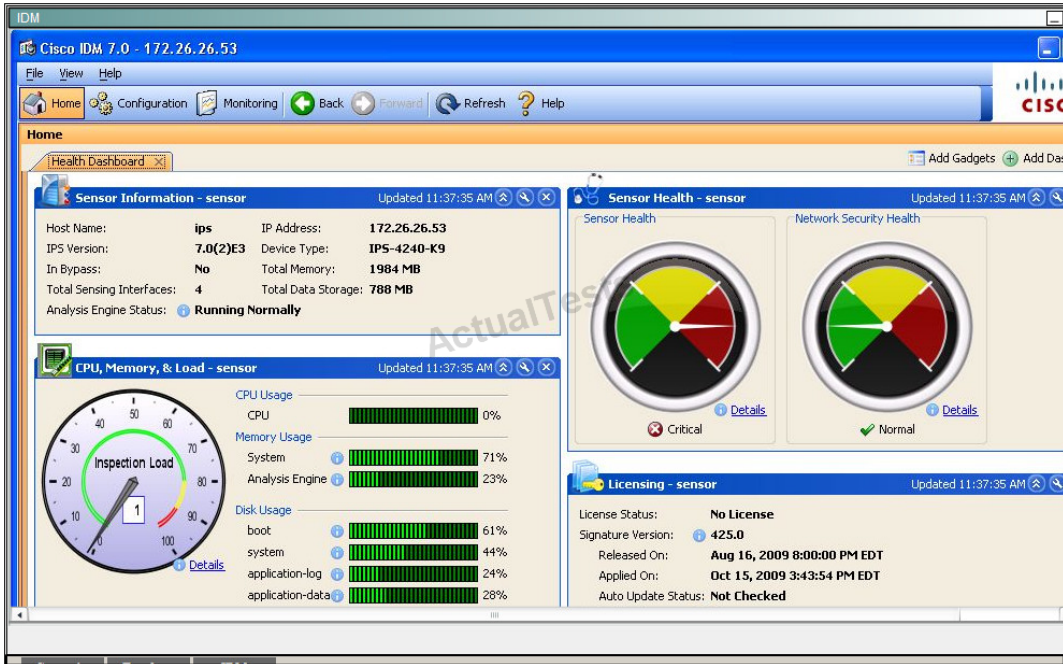

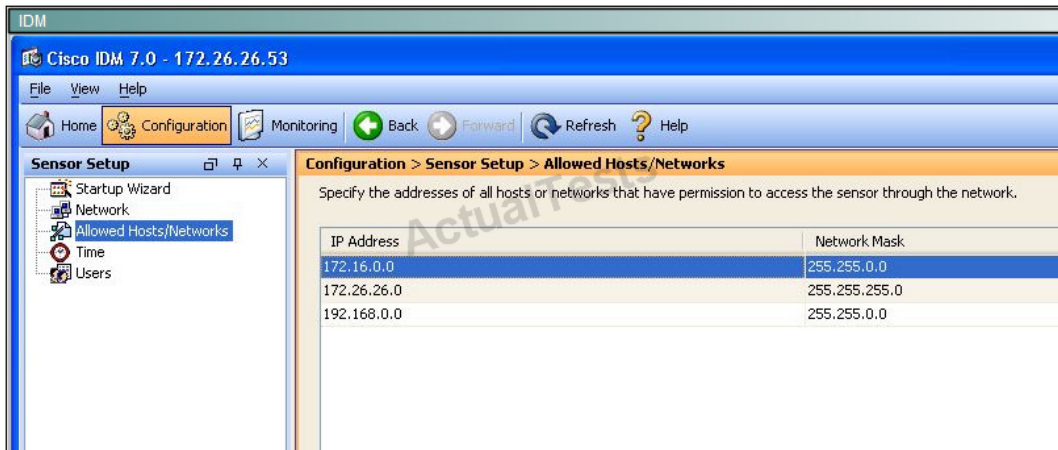

Which signature definition is virtual sensor 0 assigned to use?

- A. rules0
- B. vs0
- C. sig0
- D. ad0
- E. ad1
- F. sig1

Answer: C

Explanation:

QUESTION NO: 55

Questions

1

2

3

4

5

6

0% Complete

Instructions

You can click the grey buttons at the bottom of this frame to view the different windows.
To minimize the window, click the [-]. To move the window, click the title bar and drag the window.

Scenario

Using Cisco IPS Device Manager (IDM), answer the multiple choice questions.

Instructions

Scenario

Topology

Questions

Cisco IDM

Scenario

You are the network security administrator responsible for operation and maintenance of your organization's Cisco IPS sensor appliance. You have noticed recent malicious activity that must be more closely monitored and you have configured custom parameter tuning to detect and mitigate this activity. You will be required to perform the following tasks:

- Event Action Overrides
 - Verify and enable this feature for the rules0 instance.
- Risk Category named MYCUSTOMRISK
 - Create a custom Risk Category named MYCUSTOMRISK.
 - Assign this category a risk threshold of 80.
 - Modify the new MYCUSTOMRISK category to take the following actions:
 - Deny Attacker Inline
 - Produce Alert
 - Reset TCP Connection
- Modify the Red Threat Threshold
 - Modify value to 80 to enable the new risk category to be included in the Red threshold level for network security health statistics alert threat categorization.
- Remember to save and apply all changes as needed


To access the Cisco IPS sensor, click the client PC to launch Cisco IDM.




- userID: cisco
- password: cisco123


Scenario

Topology

IDM

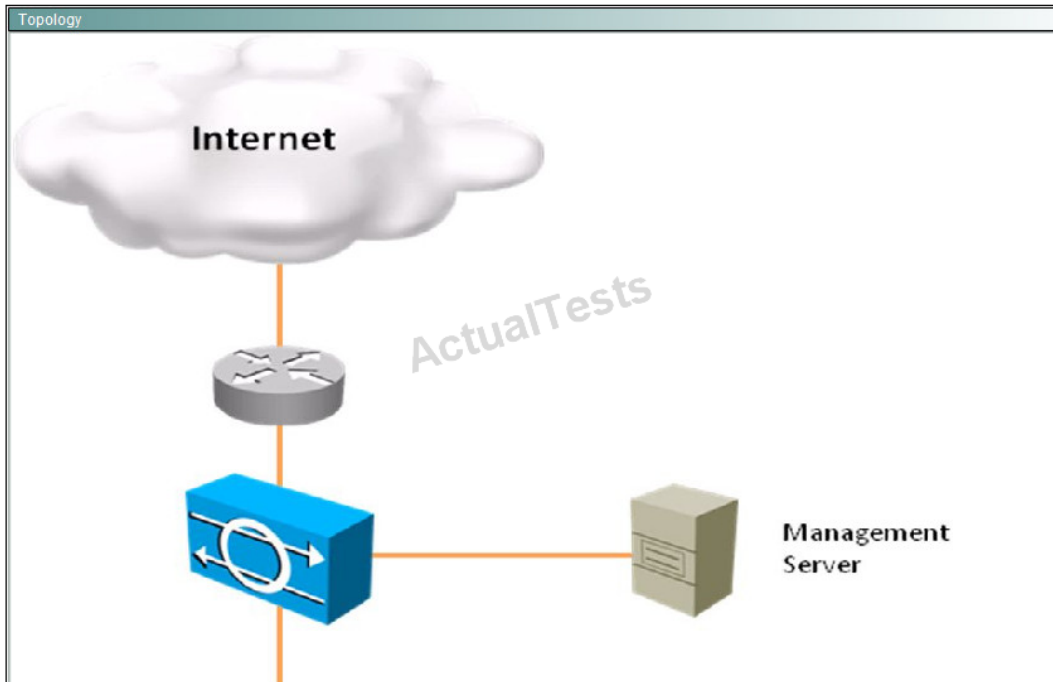

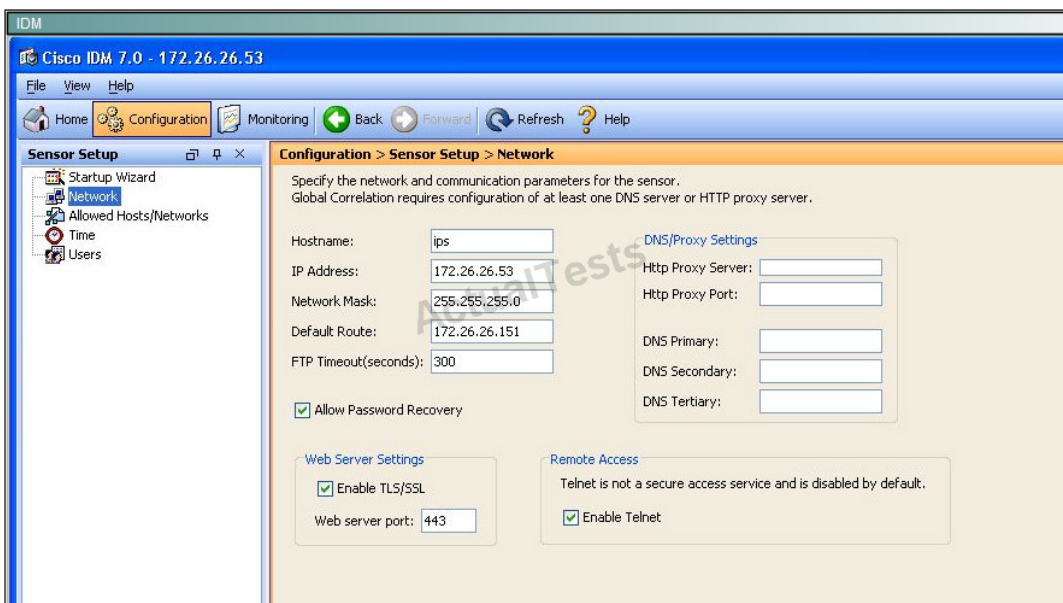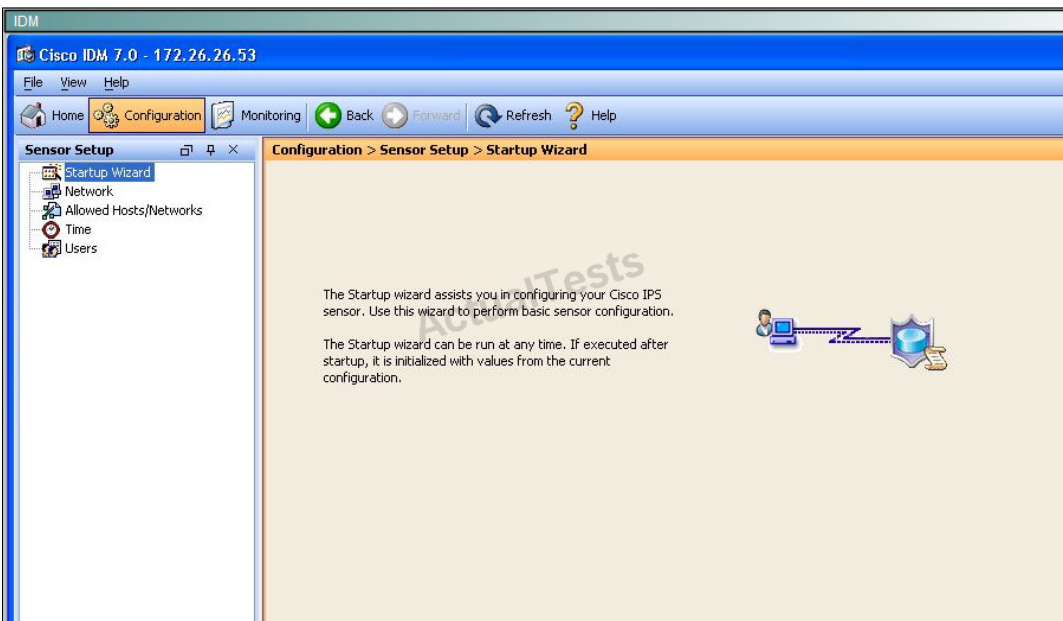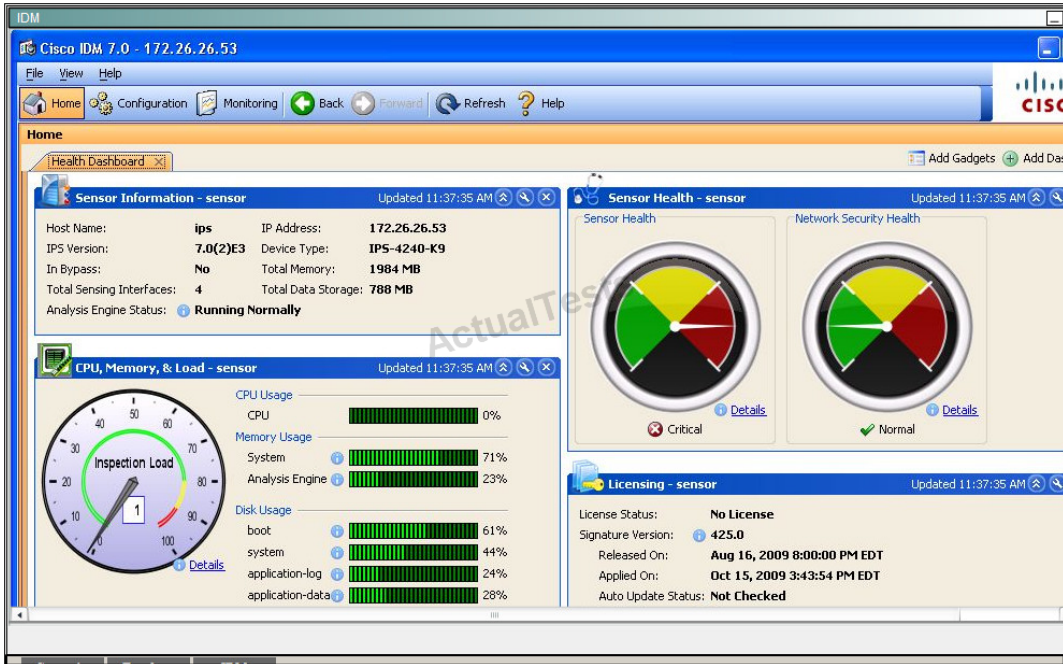

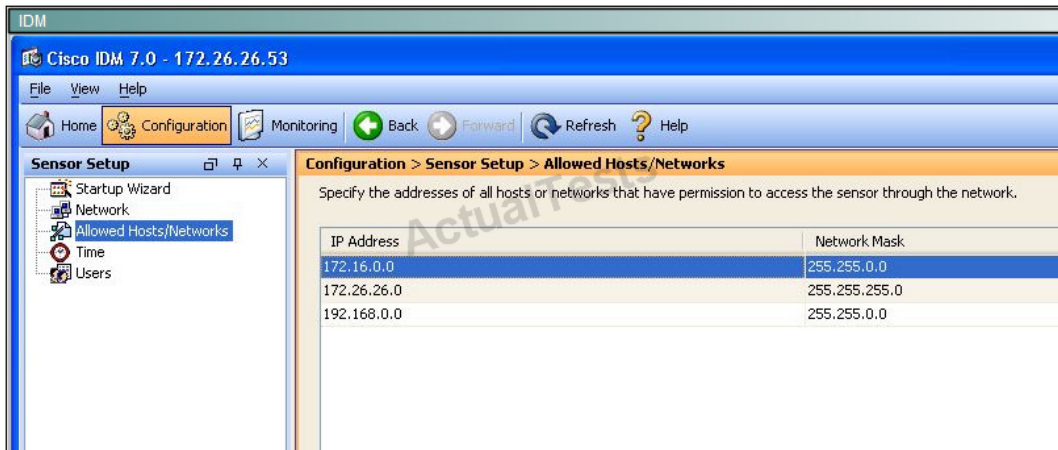

What action will the sensor take regarding IP addresses listed as known bad hosts in the Cisco SensorBase network?

- A. Global correlation is configured in Audit mode for testing the feature without actually denying any hosts.
- B. Global correlation is configured in Aggressive mode, which has a very aggressive effect on deny actions.
- C. It will not adjust risk rating values based on the known bad hosts list.
- D. Reputation filtering is disabled.

Answer: D

Explanation:

QUESTION NO: 56

Questions

1

2

3

4

5

6

0% Complete

Instructions

You can click the grey buttons at the bottom of this frame to view the different windows.
To minimize the window, click the [-]. To move the window, click the title bar and drag the window.

Scenario

Using Cisco IPS Device Manager (IDM), answer the multiple choice questions.

Instructions

Scenario

Topology

Questions

Cisco IDM

Scenario

You are the network security administrator responsible for operation and maintenance of your organization's Cisco IPS sensor appliance. You have noticed recent malicious activity that must be more closely monitored and you have configured custom parameter tuning to detect and mitigate this activity. You will be required to perform the following tasks:

- Event Action Overrides
 - Verify and enable this feature for the rules0 instance.
- Risk Category named MYCUSTOMRISK
 - Create a custom Risk Category named MYCUSTOMRISK.
 - Assign this category a risk threshold of 80.
 - Modify the new MYCUSTOMRISK category to take the following actions:
 - Deny Attacker Inline
 - Produce Alert
 - Reset TCP Connection
- Modify the Red Threat Threshold
 - Modify value to 80 to enable the new risk category to be included in the Red threshold level for network security health statistics alert threat categorization.
- Remember to save and apply all changes as needed


To access the Cisco IPS sensor, click the client PC to launch Cisco IDM.




- userID: cisco
- password: cisco123


Scenario

Topology

IDM

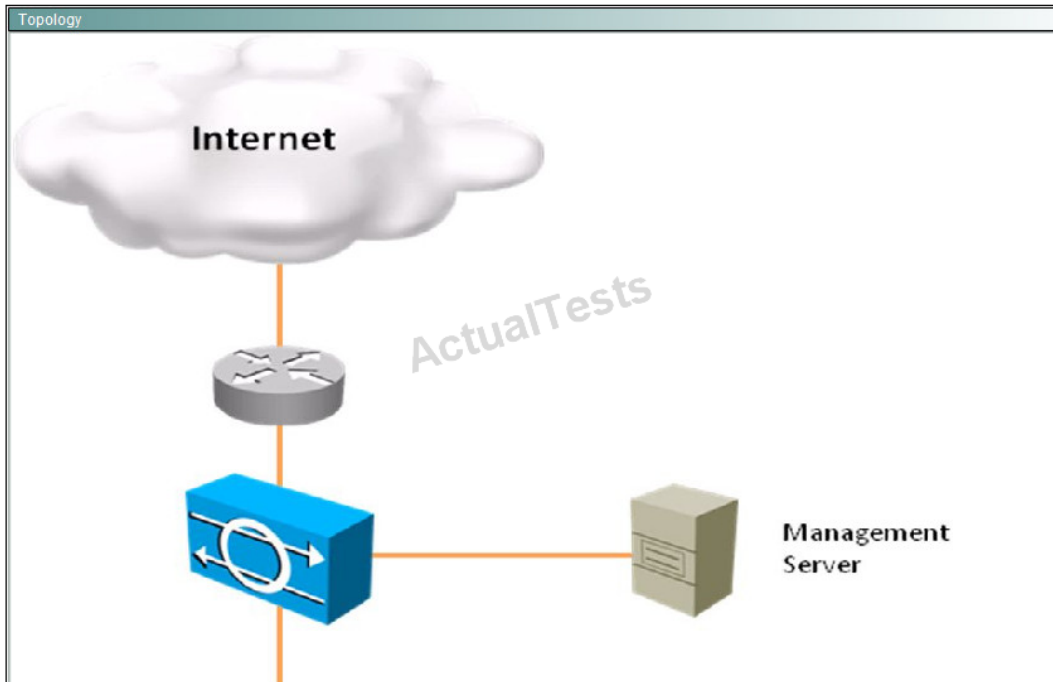

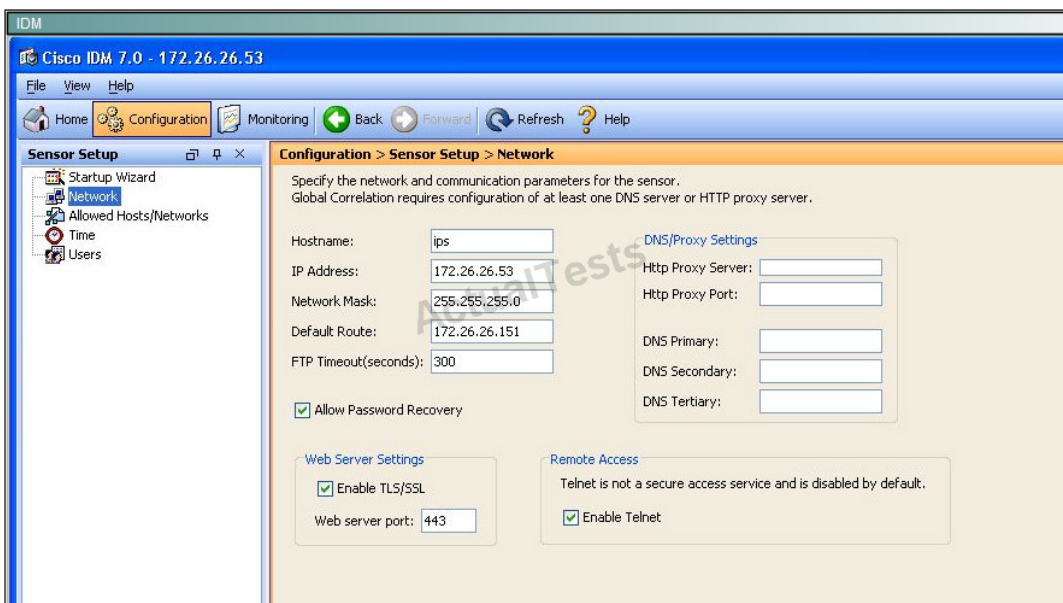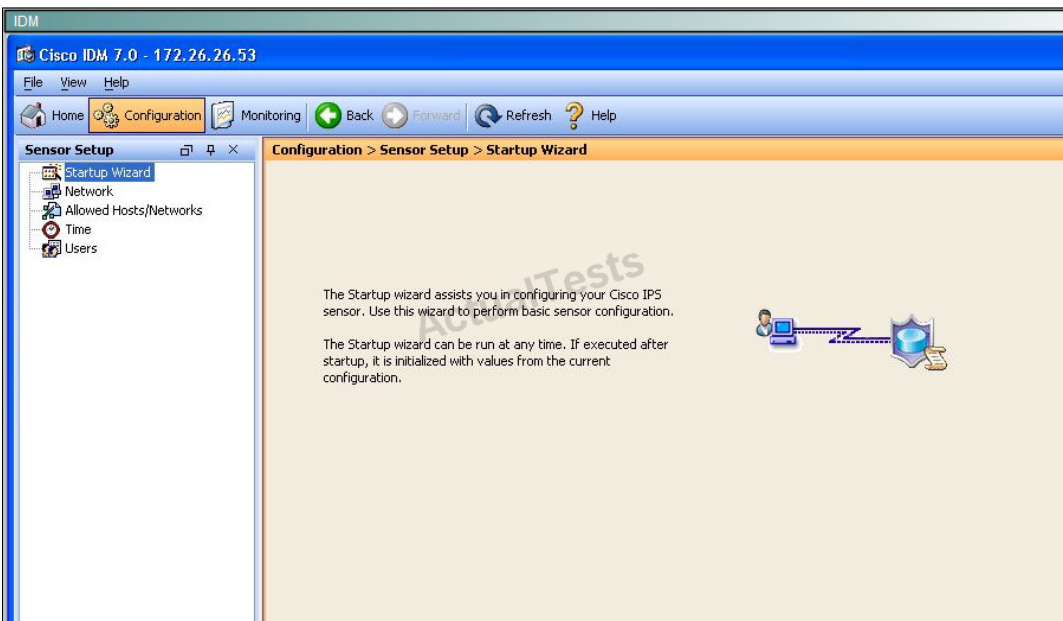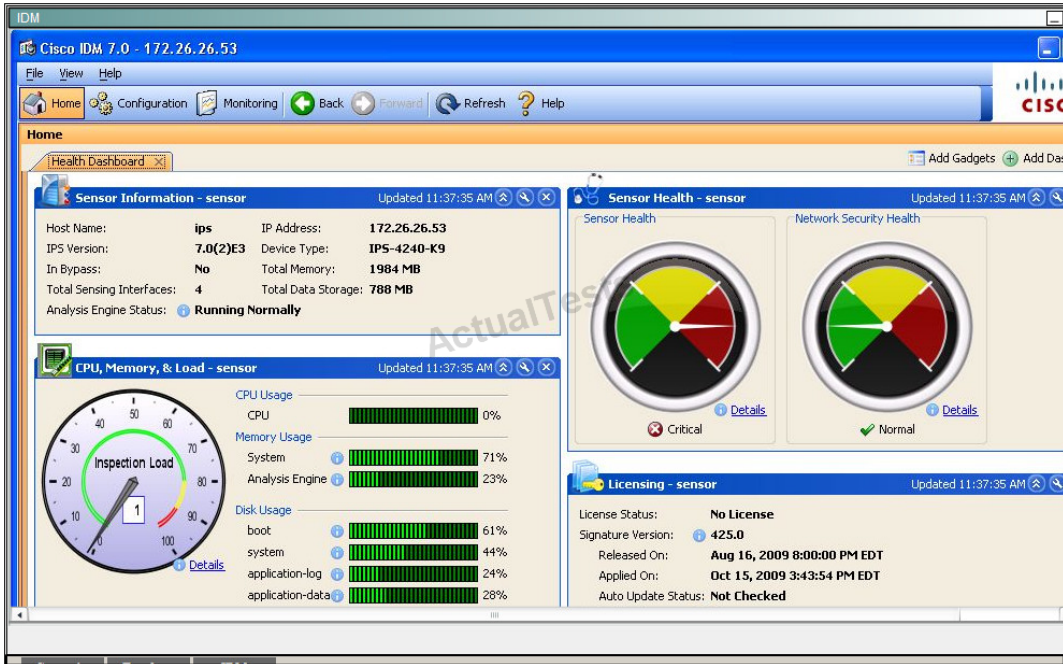

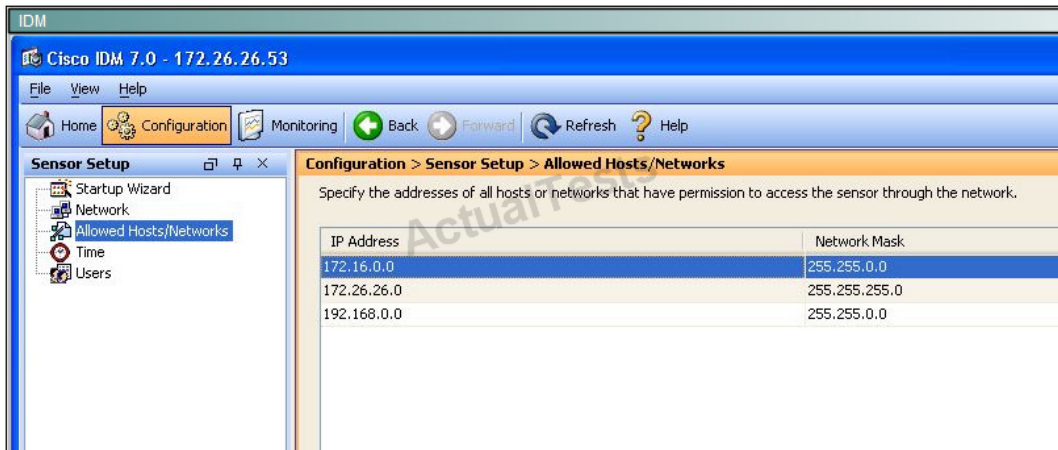

To what extent will the Cisco IPS sensor contribute data to the Cisco SensorBase network?

- A. It will not contribute to the SensorBase network.
- B. It will contribute to the SensorBase network, but will withhold some sensitive information
- C. It will contribute the victim IP address and port to the SensorBase network.
- D. It will not contribute to Risk Rating adjustments that use information from the SensorBase network.

Answer: B

Explanation:

QUESTION NO: 57

Questions

1

2

3

4

5

6

0% Complete

Instructions

You can click the grey buttons at the bottom of this frame to view the different windows.
To minimize the window, click the [-]. To move the window, click the title bar and drag the window.

Scenario

Using Cisco IPS Device Manager (IDM), answer the multiple choice questions.

Instructions

Scenario

Topology

Questions

Cisco IDM

Scenario

You are the network security administrator responsible for operation and maintenance of your organization's Cisco IPS sensor appliance. You have noticed recent malicious activity that must be more closely monitored and you have configured custom parameter tuning to detect and mitigate this activity. You will be required to perform the following tasks:

- Event Action Overrides
 - Verify and enable this feature for the rules0 instance.
- Risk Category named MYCUSTOMRISK
 - Create a custom Risk Category named MYCUSTOMRISK.
 - Assign this category a risk threshold of 80.
 - Modify the new MYCUSTOMRISK category to take the following actions:
 - Deny Attacker Inline
 - Produce Alert
 - Reset TCP Connection
- Modify the Red Threat Threshold
 - Modify value to 80 to enable the new risk category to be included in the Red threshold level for network security health statistics alert threat categorization.
- Remember to save and apply all changes as needed


To access the Cisco IPS sensor, click the client PC to launch Cisco IDM.




- userID: cisco
- password: cisco123


Scenario

Topology

IDM

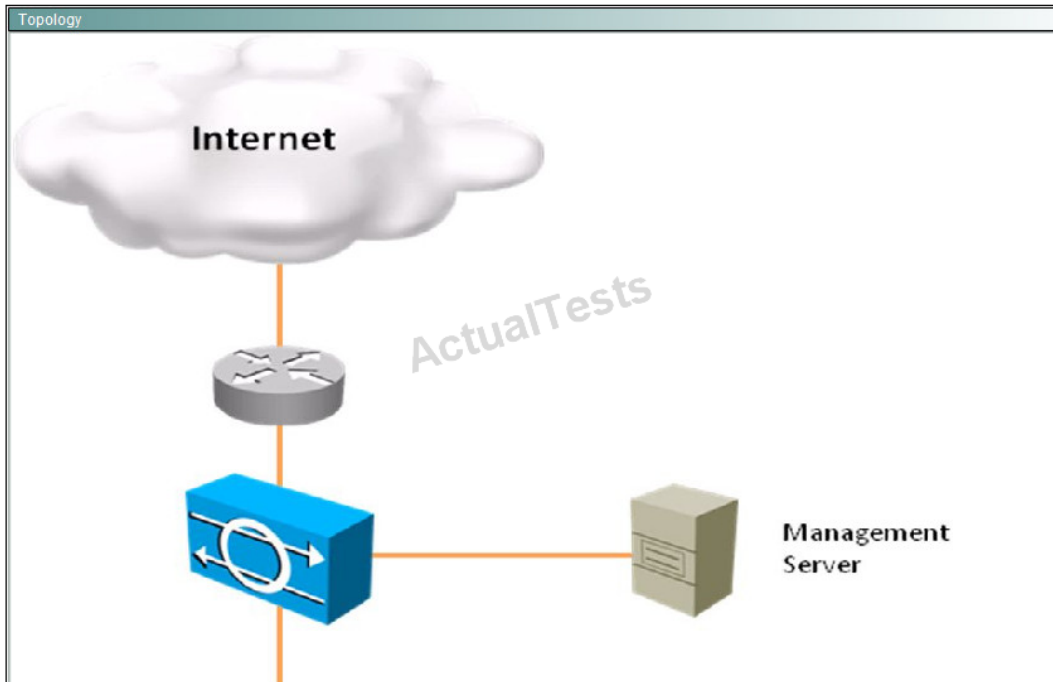

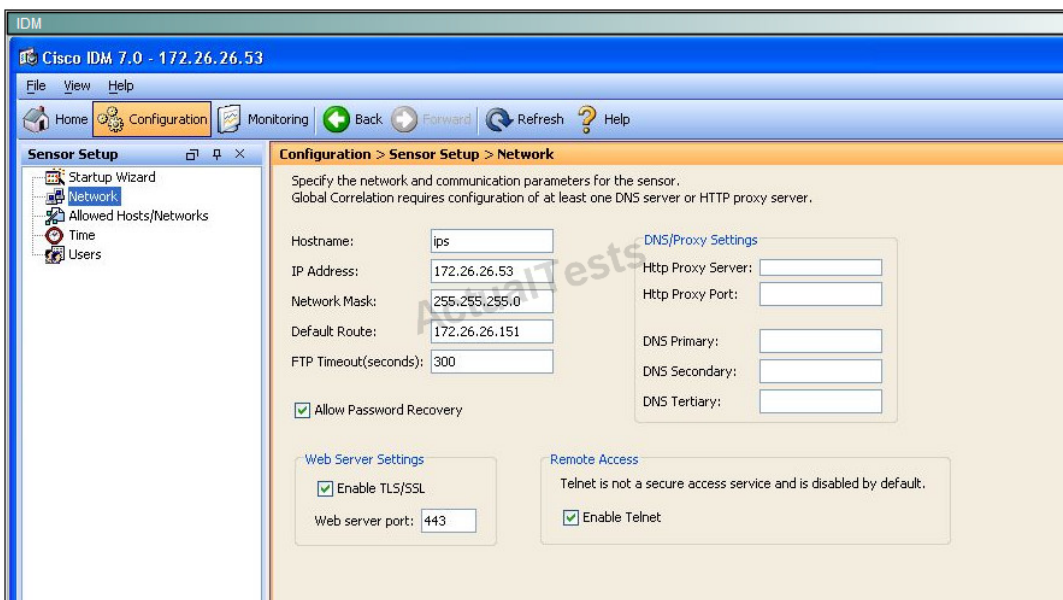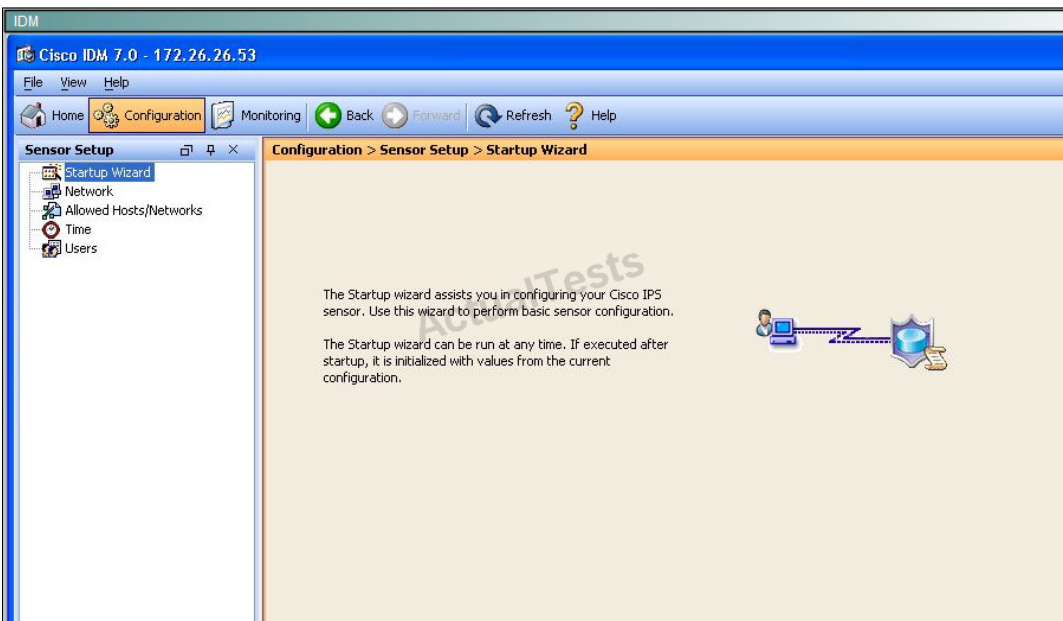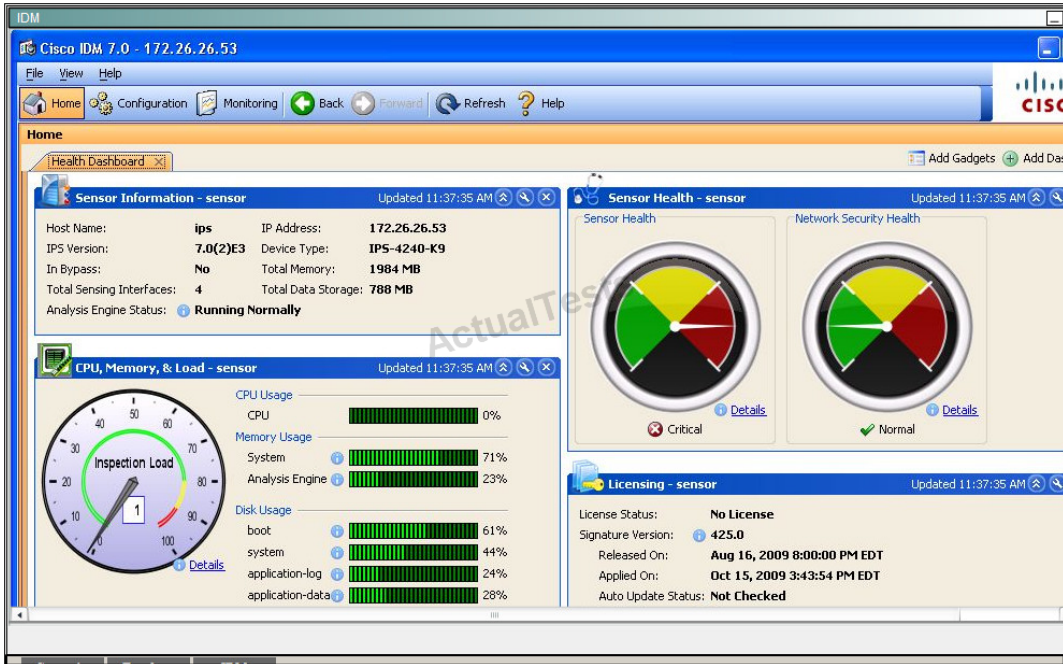

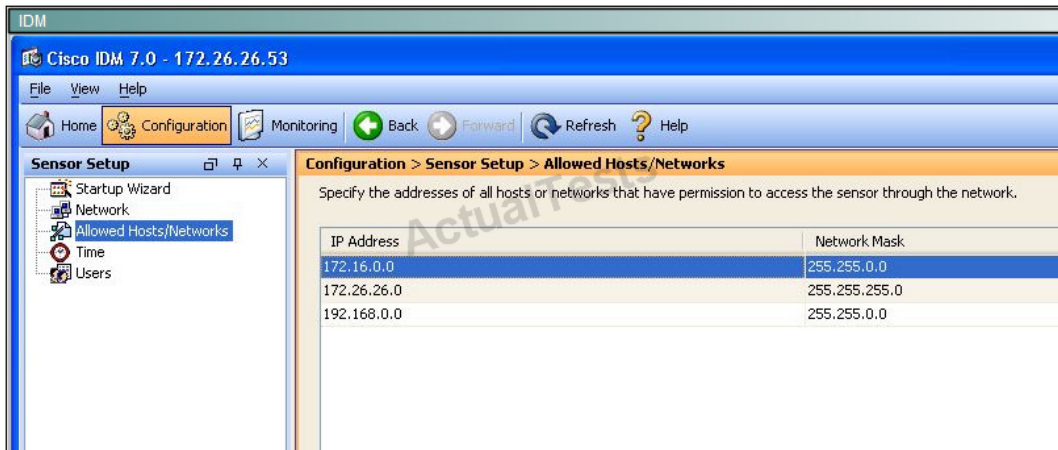

Which two statements about Signature 1104 are true? (Choose two.)

- A. This is a custom signature.
- B. The severity level is High.
- C. This signature has triggered as indicated by the red severity icon.
- D. Produce Alert is the only action defined.
- E. This signature is enabled, but inactive, as indicated by the/0 to that follows the signature number.

Answer: A,D

Explanation:

QUESTION NO: 58

Questions

1

2

3

4

5

6

0% Complete

Instructions

You can click the grey buttons at the bottom of this frame to view the different windows.
To minimize the window, click the [-]. To move the window, click the title bar and drag the window.

Scenario

Using Cisco IPS Device Manager (IDM), answer the multiple choice questions.

Instructions

Scenario

Topology

Questions

Cisco IDM

Scenario

You are the network security administrator responsible for operation and maintenance of your organization's Cisco IPS sensor appliance. You have noticed recent malicious activity that must be more closely monitored and you have configured custom parameter tuning to detect and mitigate this activity. You will be required to perform the following tasks:

- Event Action Overrides
 - Verify and enable this feature for the rules0 instance.
- Risk Category named MYCUSTOMRISK
 - Create a custom Risk Category named MYCUSTOMRISK.
 - Assign this category a risk threshold of 80.
 - Modify the new MYCUSTOMRISK category to take the following actions:
 - Deny Attacker Inline
 - Produce Alert
 - Reset TCP Connection
- Modify the Red Threat Threshold
 - Modify value to 80 to enable the new risk category to be included in the Red threshold level for network security health statistics alert threat categorization.
- Remember to save and apply all changes as needed


To access the Cisco IPS sensor, click the client PC to launch Cisco IDM.




- userID: cisco
- password: cisco123


Scenario

Topology

IDM

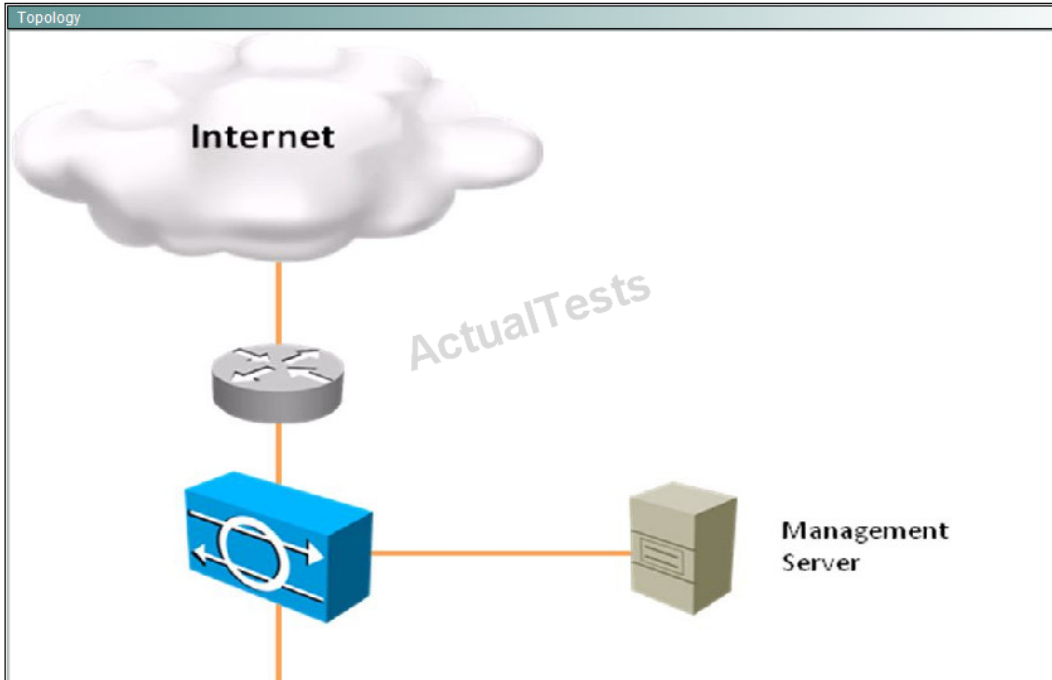

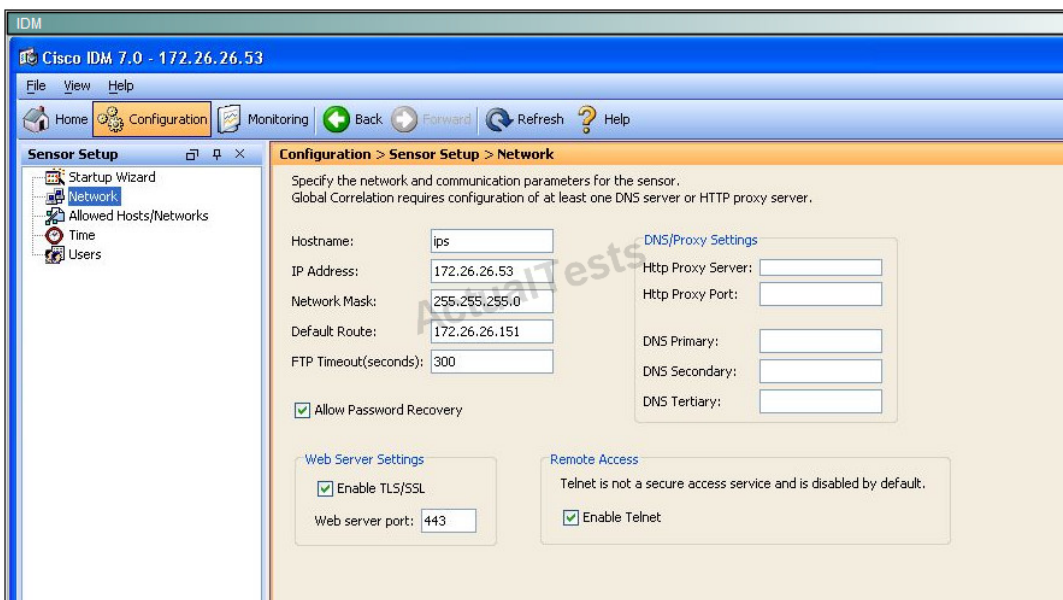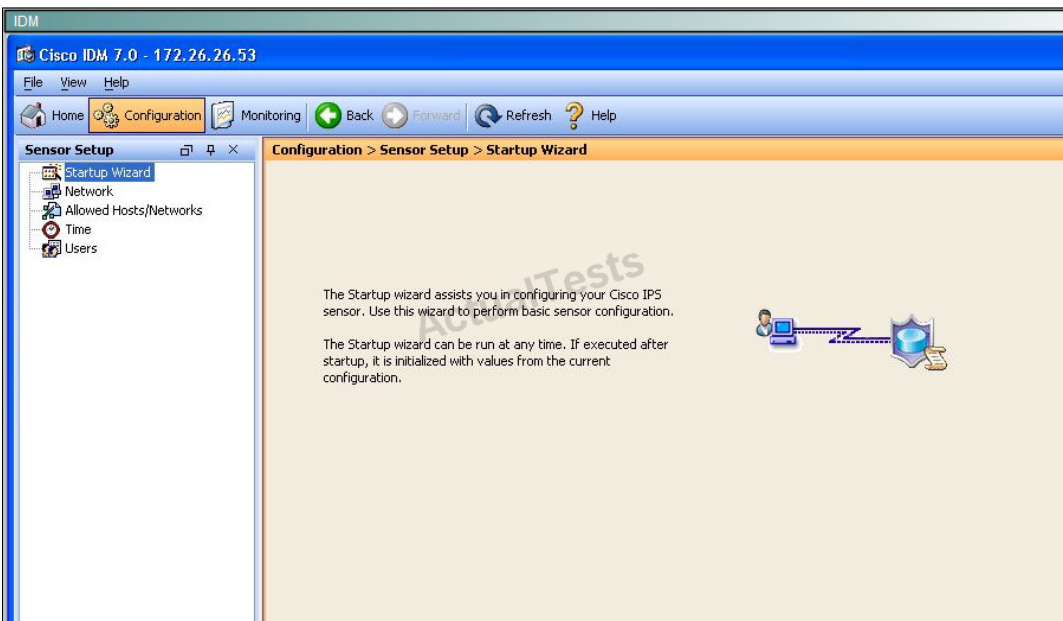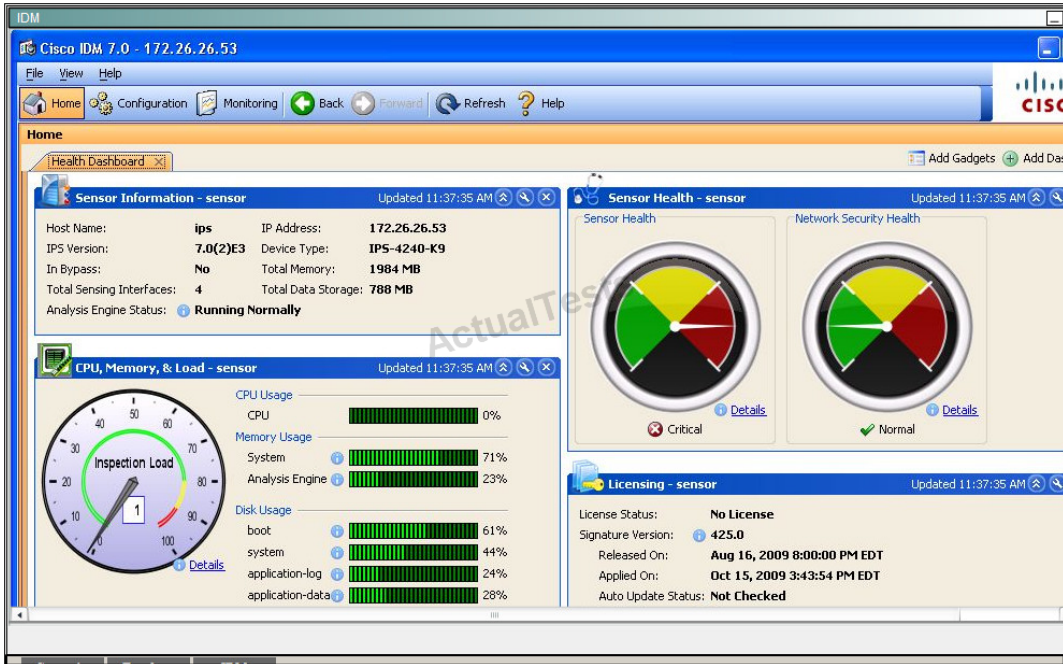

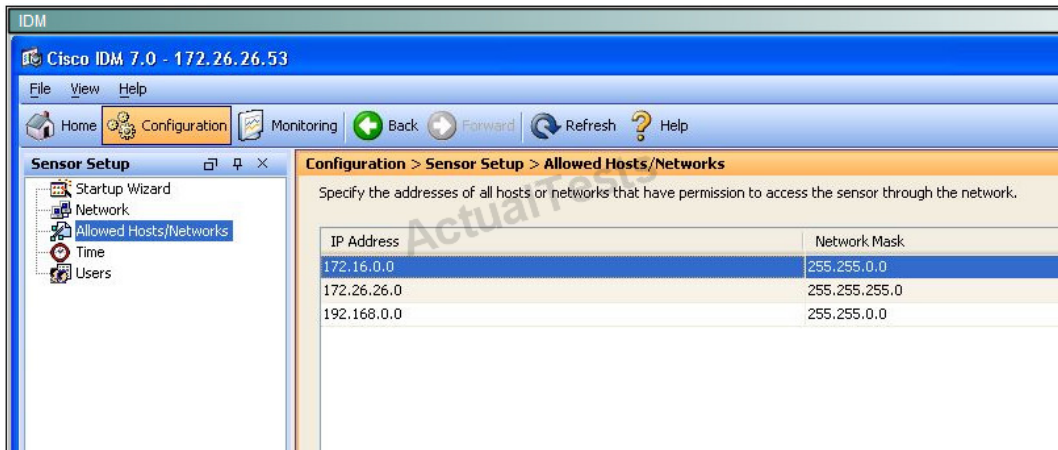

Which three statements about the Cisco IPS appliance configurations are true? (Choose three.)

- A. The maximum number of denied attackers is set to 10000.
- B. The block action duration is set to 3600 seconds.
- C. The Meta Event Generator is globally enabled.
- D. Events Summarization is globally disabled.
- E. Threat Rating Adjustment is globally disabled.

Answer: A,B,C

Explanation:

QUESTION NO: 59

Which four statements about the blocking capabilities of the Cisco IPS appliance are true? (Choose four.)

- A. The three types of blocks are: host, connection, and network.
- B. Host and connection blocks can be initiated manually or automatically when a signature is triggered.
- C. Network blocks can only be initiated manually.
- D. The Device Login Profiles pane is used to configure the profiles that the network devices use when logging into the Cisco IPS appliance
- E. Multiple Cisco IPS appliances can forward their blocking requests to the master blocking sensor.
- F. Pre-Block and Post-Block ACLs are applicable for blocking or rate limiting.

Answer: A,B,C,E

Explanation:

QUESTION NO: 60

OS mappings associate IP addresses with an OS type, which in turn helps the Cisco IPS appliance to calculate what other value?

- A. TVR
- B. SFR
- C. ARR
- D. PD
- E. ASR

Answer: C

Explanation:

QUESTION NO: 61

Which signature engine is recommended for creating a custom signature for packet header matching?

- A. MULTI-STRING
- B. FLOOD.HOST
- C. ATOMIC.IP
- D. SERVICE
- E. SWEEP
- F. META

Answer: C

Explanation:

QUESTION NO: 62

On the Cisco IPS appliance, the anomaly detection knowledge base is used to store which two types of information for each service? (Choose two.)

- A. scanner threshold
- B. packet per second rate limit
- C. anomaly detection mode
- D. histogram
- E. total bytes transferred

Answer: A,D

Explanation:

QUESTION NO: 63

Which four features are supported on the Cisco ASA AIP-SSM but are not supported on the Cisco ASA AIP-SSC? (Choose four.)

- A. multiple virtual sensors
- B. anomaly detection
- C. promiscuous mode
- D. custom signatures
- E. fail open
- F. global correlation

Answer: A,B,D,F

Explanation:

QUESTION NO: 64

Which Cisco IPS appliance TCP session tracking mode should be used if packets of the same session are coming to the sensor over different interfaces, but should be treated as a single session?

- A. interface and VLAN
- B. virtual sensor
- C. VLAN only
- D. promiscuous
- E. normalizer

Answer: B

Explanation:

QUESTION NO: 65

Which two Cisco IPS appliance features are implemented using input data from the Cisco SensorBase? (Choose two.)

- A. global correlation

- B. anomaly detection
- C. reputation filters
- D. botnet traffic filters
- E. OS fingerprinting
- F. threat detection

Answer: A,C

Explanation:

QUESTION NO: 66

Which four configuration elements can the virtual sensor of an Cisco IPS appliance have? (Choose four.)

- A. interfaces or VLAN pairs
- B. IPS reputation filters
- C. signature set definition
- D. global correlation rules
- E. event action rules (filters and overrides)
- F. anomaly detection policy

Answer: A,C,E,F

Explanation:

QUESTION NO: 67

Which value is not used by the Cisco IPS appliance in the risk rating calculation?


- A. attack severity rating
- B. target value rating
- C. signature fidelity rating
- D. promiscuous delta
- E. threat rating adjustment
- F. watch list rating

Answer: E

Explanation:

QUESTION NO: 68

Refer to the exhibit. Which General settings under the Event Action Rule affect the risk rating calculations?

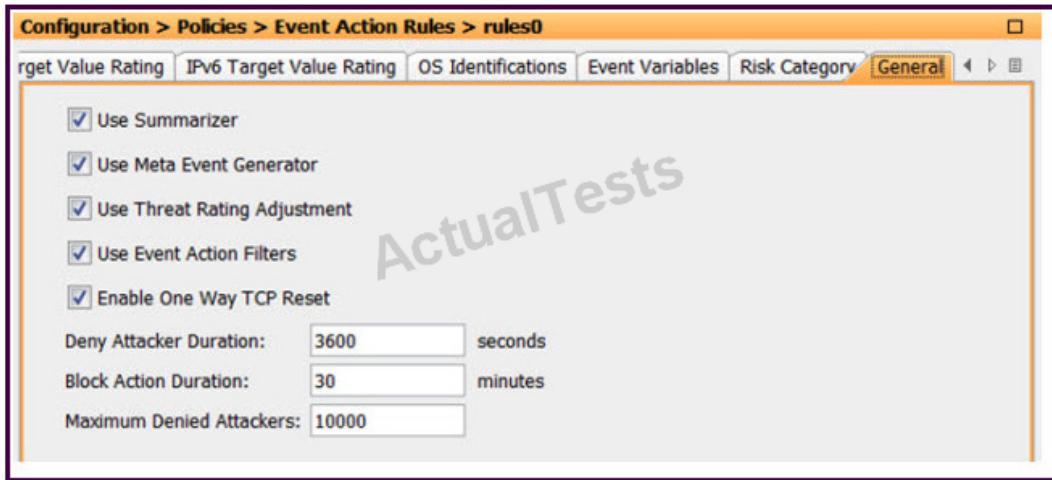

The screenshot shows the 'Configuration > Policies > Event Action Rules > rules0' configuration page. The 'General' tab is selected. The following settings are visible:

- ☒ Use Summarizer
- ☒ Use Meta Event Generator
- ☒ Use Threat Rating Adjustment
- ☒ Use Event Action Filters
- ☒ Enable One Way TCP Reset
- Deny Attacker Duration: 3600 seconds
- Block Action Duration: 30 minutes
- Maximum Denied Attackers: 10000

A large 'ActualTests' watermark is visible across the center of the configuration area.

- A. Use Summarizer
- B. Use Meta Event Generator
- C. Use Threat Rating Adjustment
- D. Use Event Action Filters
- E. Enable One Way TCP Reset

Answer: C

Explanation:

QUESTION NO: 69

In a centralized Cisco IPS appliance deployment, it may not be possible to connect an IPS appliance to every switch or segment in the network. So, an IPS appliance can be deployed to inspect traffic on ports that are located on multiple remote network switches. In this case, which two configurations required? (Choose two.)

- A. IPS promiscuous mode operations
- B. in-line IPS operations
- C. RSPAN
- D. SPAN
- E. HSRP
- F. SLB

Answer: A,C

Explanation:

QUESTION NO: 70

Which three actions does the Cisco IDM custom signature wizard provide? (Choose three.)

- A. selecting the signature engine to use or not to use any signature engine
- B. selecting the Layer 3 or Layer 4 protocol that the sensor will use to match malicious traffic
- C. selecting the attack relevancy rating
- D. selecting the signature threat rating
- E. selecting the scope of matching (for example, single packet)

Answer: A,B,E

Explanation:

QUESTION NO: 71

You want your inline Cisco IPS appliance to drop packets that pose the most severe risk to your network, especially to the servers on your DMZ. Which two parameters should you set to protect your DMZ servers in the most-time-efficient manner? (Choose two.)

- A. event action filter
- B. reputation filter
- C. target value rating
- D. signature fidelity rating
- E. global correlation
- F. event action override

Answer: C,F

Explanation:

QUESTION NO: 72

Which Cisco IPS appliance feature is best used to detect these two conditions? 1) The network starts becoming congested by worm traffic. 2) A single worm-infected source enters the network and starts scanning for other vulnerable hosts.

- A. global correlation
- B. anomaly detection
- C. reputation filtering

- D. custom signature
- E. meta signature
- F. threat detection

Answer: B

Explanation:

QUESTION NO: 73

What will happen if you try to recover the password on the Cisco IPS 4200 Series appliance on which password recovery is disabled?

- A. The GRUB menu will be disabled.
- B. The ROM monitor command to reset the password will be disabled.
- C. The password recovery process will proceed with no errors or warnings; however, the password is not reset.
- D. The Cisco IPS appliance will reboot immediately.

Answer: C

Explanation:

QUESTION NO: 74

Which four networking tools does Cisco IME include that can be invoked for specific events, to learn more about attackers and victims using basic network reconnaissance? (Choose four.)

- A. ping
- B. traceroute
- C. packet tracer
- D. nslookup
- E. whois
- F. nmap

Answer: A,B,D,E

Explanation:

QUESTION NO: 75

Which two statements are true with respect to the AIP-SSM? (Choose two.)

- A. The hosting ASA will always bypass the AIP-SSM if the AIP-SSM fails.
- B. The AIP-SSM supports up to four virtual sensors.
- C. Initial setup of the AIP-SSM is configured through its external console port.
- D. The AIP-SSM supports both promiscuous and inline analysis.
- E. The AIP-SSM must be managed by the IPS Device Manager.

Answer: B,D

Explanation:

QUESTION NO: 76

Which two statements are true with respect to the AIP-SSC? (Choose two.)

- A. The AIP-SSC is a module for the ASA 5510.
- B. The AIP-SSC supports a maximum of two virtual sensors.
- C. The AIP-SSC supports custom signatures.
- D. The AIP-SSC supports fail open.
- E. The AIP-SSC supports both promiscuous and inline analysis.

Answer: D,E

Explanation:

QUESTION NO: 77

Refer to the exhibit of a partial Cisco IPS appliance CLI configurations,

```
!  
service host  
network-settings  
host-ip 172.26.26.53/24,172.26.26.151  
host-name ips  
access-list 172.26.26.0/24  
! output omitted
```

what is the purpose of the access-list CLI command?

- A. to define network objects that are used for IPS policy application
- B. to specify which traffic will be analyzed on the sensing interfaces of the IPS sensor

- C. to configure manually blocked IP addresses
- D. to specify trusted management IP addresses for SSH and HTTPS access to the IPS appliance

Answer: D

Explanation:

QUESTION NO: 78

The AIP-SSM CLI can be accessed from the ASA CLI by using which command?

- A. connect
- B. telnet
- C. hw-module
- D. session
- E. module

Answer: D

Explanation:

QUESTION NO: 79

The Cisco IPS appliance global correlation and reputation filtering features depend on which two of these? (Choose two.)

- A. anomaly detection
- B. OS fingerprinting
- C. Cisco SensorBase
- D. watch list ratings
- E. event action overrides
- F. DNS

Answer: C,F

Explanation:

QUESTION NO: 80

Which four statements are true about the Cisco IPS global correlation and reputation filtering features? (Choose four.)

- A. Reputation filtering can adjust the risk rating of an alert.
- B. Reputation filtering can be set to permissive, standard, or aggressive.
- C. Global correlation can be trialed in with a test mode.
- D. Reputation filtering can drop packets from untrusted source IP addresses.
- E. Both global correlation and reputation filtering leverage Cisco SenderBase.
- F. Global correlation can adjust the risk rating of an alert.

Answer: C,D,E,F

Explanation:

QUESTION NO: 81

When setting up a Cisco IPS appliance in promiscuous mode, which Cisco Catalyst switch CLI command is used to configure SPAN on the switch?

- A. span source in interface configuration mode
- B. span session in global configuration mode
- C. monitor destination in interface configuration mode
- D. monitor session in global configuration mode
- E. mirror session in global configuration mode

Answer: D

Explanation:

QUESTION NO: 82

The AIP-SSC differs from the AIP-SSM in which three ways? (Choose three.)

- A. It uses the ASA backplane as its monitoring interface.
- B. It does not support fail open operation.
- C. It does not support global correlation.
- D. It does not support custom signatures.
- E. It supports only one virtual sensor.
- F. It does not support inline operation.

Answer: C,D,E

Explanation:

QUESTION NO: 83

Which ASA CLI command is used to configure the network parameters for downloading the AIP-SSM recovery image?

- A. hw-module 1 recover boot
- B. hw-module 1 recover configure
- C. sysopt ips recovery configure
- D. sysopt ips recover-location
- E. boot hw-module 1 tftp
- F. boot system tftp

Answer: B

Explanation:

QUESTION NO: 84

Which global correlation data is sent to the Cisco SensorBase Network with full network participation that is not sent with partial network participation?

- A. attack type
- B. connecting IP address and port
- C. victim IP address and port
- D. protocol attributes
- E. IPS appliance CPU and memory usage information

Answer: C

Explanation:

QUESTION NO: 85

Anomaly detection may send an alert under which two circumstances? (Choose two.)

- A. The attacker obfuscates a malicious HTTP request.
- B. Inbound traffic arrives from a source with a low reputation score.
- C. Outbound traffic is destined towards a known botnet system.
- D. A single worm-infected source enters the network and starts scanning for other vulnerable hosts.
- E. Benign traffic is misinterpreted as an attack.
- F. The network starts becoming congested by worm traffic.

Answer: D,F

Explanation:

QUESTION NO: 86

Which Cisco IPS feature is most likely to respond to a zero-day attack?

- A. reputation filtering
- B. botnet filtering
- C. anomaly detection
- D. meta-engine
- E. de-obfuscation
- F. threat detection

Answer: C

Explanation:

QUESTION NO: 87

Which two interface modes can be implemented with a single physical sensing interface on the Cisco IPS 4200 Series appliance? (Choose two.)

- A. inline interface pair
- B. inline VLAN groups
- C. inline VLAN pair
- D. promiscuous
- E. hardware bypass

Answer: C,D

Explanation:

QUESTION NO: 88

Which Cisco IDM pane is used to add the public keys of all the SSH clients that are allowed to connect to the IPS appliance SSH server using RSA authentication?

- A. Configuration > Sensor Management > SSH > Authorized Keys
- B. Configuration > Sensor Management > SSH > Known Host Keys

- C. Configuration > Sensor Management > SSH > Sensor key
- D. Configuration > Sensor Management > Certificates > Trusted Hosts
- E. Configuration > Sensor Management > Certificates > Server Certificate
- F. Configuration > Sensor Management > Certificates > Known Host Keys

Answer: A

Explanation:

QUESTION NO: 89

Refer to the exhibit of a Cisco IPS CLI configuration, which statement is true?

```
!  
service host  
network-settings  
host-ip 172.26.26.1/24,172.26.26.2  
host-name ips  
telnet-option enabled  
access-list 172.26.26.2/32  
exit  
exit  
!
```

- A. The IPS administrator should be able to use Telnet to connect to the IP appliance 172.26.26.1 IP address.
- B. The IPS administrator should be able to use Telnet to connect to the IP appliance 172.26.26.2 IP address.
- C. The IP appliance default gateway IP address is 172.26.26.1.
- D. The IPS administrator will not be able to use Telnet to connect to the IP appliance.
- E. The IP appliance primary IP address is 172.26.26.1 with a secondary IP address of 172.26.26.2.

Answer: D

Explanation:

QUESTION NO: 90

Which two statements are true with respect to IPS false negatives? (Choose two.)

- A. A false negative is the failure of the IPS to create an alert on malicious activity.
- B. Increasing event count thresholds can lead to false negatives.
- C. A false negative results in an IPS alert that is associated with an unsuccessful denial of service attack.
- D. Disabling anti-evasion features of the IPS can reduce false negatives.
- E. False negatives can only occur when an IPS sensor is in promiscuous mode.

Answer: A,B

Explanation:

QUESTION NO: 91

You are tasked to create a custom IPS signature using the IDM Custom Signature Wizard to detect a network reconnaissance attack in which one system makes connections to multiple hosts on multiple TCP ports. Which Cisco IPS signature engine should be selected to configure this custom IPS signature?

- A. Atomic IP
- B. Atomic IP Advanced
- C. String TCP
- D. Sweep
- E. Meta

Answer: D

Explanation:

QUESTION NO: 92

All signatures in the Cisco IPS signature set include which three parameters that can be tuned according to the environment? (Choose three.)

- A. vulnerable OS list
- B. alert severity rating
- C. inline mode delta
- D. signature fidelity rating
- E. threat rating

Answer: A,B,D

Explanation:

QUESTION NO: 93

Which Cisco IPS signature parameter cannot be edited using IDM?

- A. signature name
- B. signature engine type
- C. signature type
- D. vulnerable OS list
- E. event count key

Answer: B

Explanation:

QUESTION NO: 94

Which two IPS appliance configuration options are used in conjunction with the attack relevance rating feature? (Choose two.)

- A. OS mappings
- B. OS risk category levels
- C. passive OS fingerprinting
- D. OS target value rating
- E. OS event action filter
- F. OS event action override

Answer: A,C

Explanation:

QUESTION NO: 95

Which three of these are true with respect to the numeric values associated with the target value rating? (Choose three.)

- A. Mission Critical = 100
- B. Mission Critical = 200
- C. High = 75
- D. Medium = 50
- E. Low = 75
- F. 100 is the default target value rating

Answer: B,E,F

Explanation:

QUESTION NO: 96

The threat rating is calculated using which two factors? (Choose two.)

- A. event action overrides
- B. attack severity rating
- C. risk rating
- D. preventative actions taken by the Cisco IPS sensor
- E. target value rating
- F. attack relevancy rating

Answer: C,D

Explanation:

QUESTION NO: 97

Which of these depicts the correct process order of the Cisco IPS reputation filters and global correlation operations?

- A. IPS reputation filters > signature inspection > global correlation
- B. IPS reputation filters > global correlation > signature inspection
- C. global correlation > IPS reputation filters > signature inspection
- D. signature inspection > IPS reputation filters > global correlation

Answer: A

Explanation:

QUESTION NO: 98

What are the three valid options for configuring Cisco SensorBase participation? (Choose three.)

- A. off
- B. test
- C. manual
- D. automatic
- E. partial

F. full

Answer: A,E,F

Explanation:

QUESTION NO: 99

Refer to the exhibit.

Name	Value
Signature Definition	
Signature ID	3108
SubSignature ID	0
Alert Severity	High
Sig Fidelity Rating	85
Promiscuous Delta	10
Sig Description	
Signature Name	SMTP MIME Content Overflow
Alert Notes	
User Comments	
Alert Traits	0
Release	\$2
Signature Creation Date	20010202
Signature Type	Vulnerability
Engine	State
Event Action	Produce Alert
State Machine	SMTP
State Name	Mail Header
Specify Min Match Length	Yes
Min Match Length	200
Regex String	[Cc][Oo][Nn][Tt][Ee][Nn][Tt][-].*\n
Direction	To Service
Service Ports	25-25
Swap Attacker Victim	No
Specify Exact Match Offset	No
Specify Max Match Offset	No
Specify Min Match Offset	No
Event Counter	
☒ Event Count	3
Event Count Key	Attacker and victim addresses and ports
☒ Specify Alert Interval	Yes
Alert Interval	60
Alert Frequency	
Summary Mode	Fire Once
Summary Key	Attacker and victim addresses and ports
Specify Global Summary Threshold	No
Status	
☒ Enabled	Yes
Retired	Yes
Obsoletes	(Click to view or edit the details)
Vulnerable OS List	Windows NT/2K/XP

Which statement is true about the IPS signature shown?

- A. To match a string, the regular expression requires zero or more period characters (.) to immediately precede the newline character.
- B. A summary alert is sent once during each interval for each unique Summary Key entry.
- C. An alert is generated each time the signature triggers.
- D. This signature does not fire until three events are seen during 60 minutes with the same attacker and victim IP addresses and ports.


E. This signature does not analyze traffic that is sent from the SMTP server to the client.

Answer: E

Explanation:

QUESTION NO: 100

Refer to the exhibit.

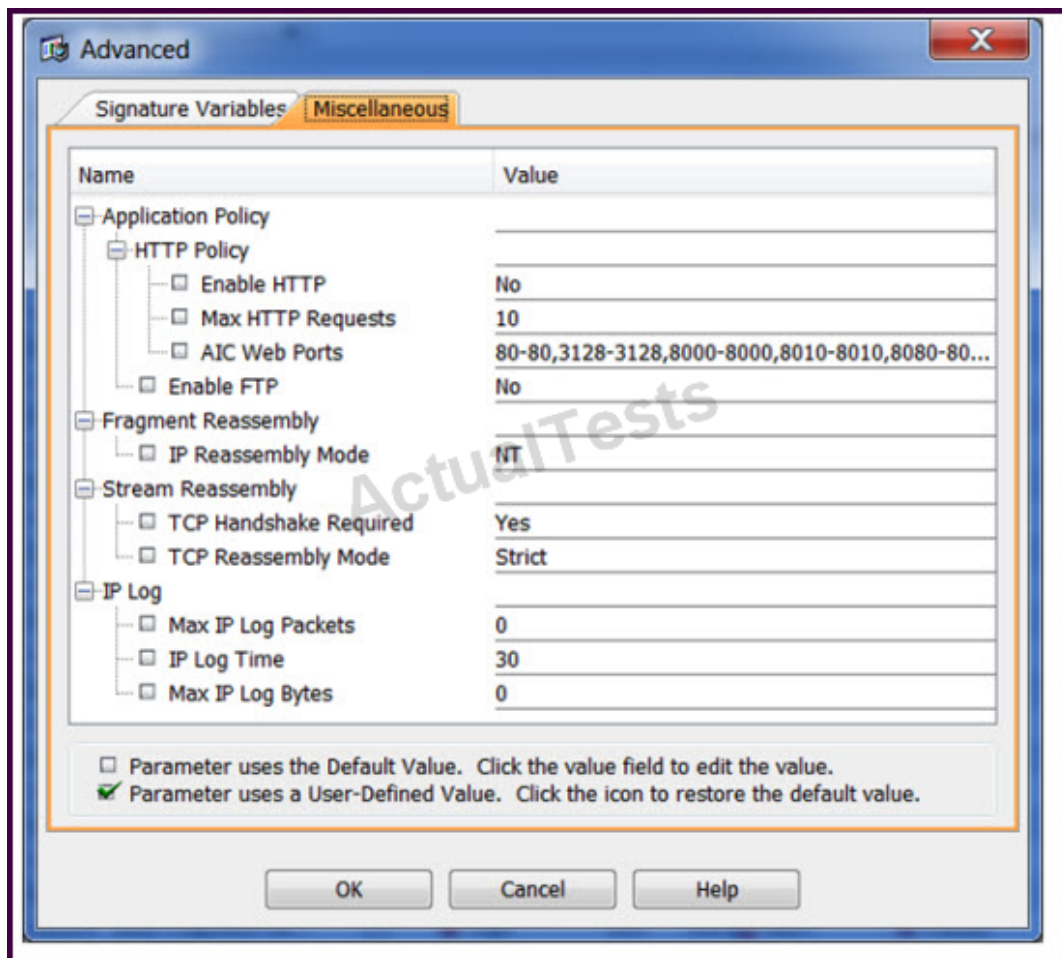

Which statement is true?


- A. The Service HTTP engine is disabled.
- B. The Cisco IPS sensor will send an alert if an attacker makes more than 10 HTTP requests to a single target server.
- C. The IP logging feature has been disabled by setting the Max IP Log Packets and Max IP Log Bytes to 0.
- D. Application inspection and control for HTTP is disabled.
- E. Automatic IP Log actions will capture the specified traffic for 30 minutes.

Answer: D

Explanation:

QUESTION NO: 101

Refer to the exhibit.

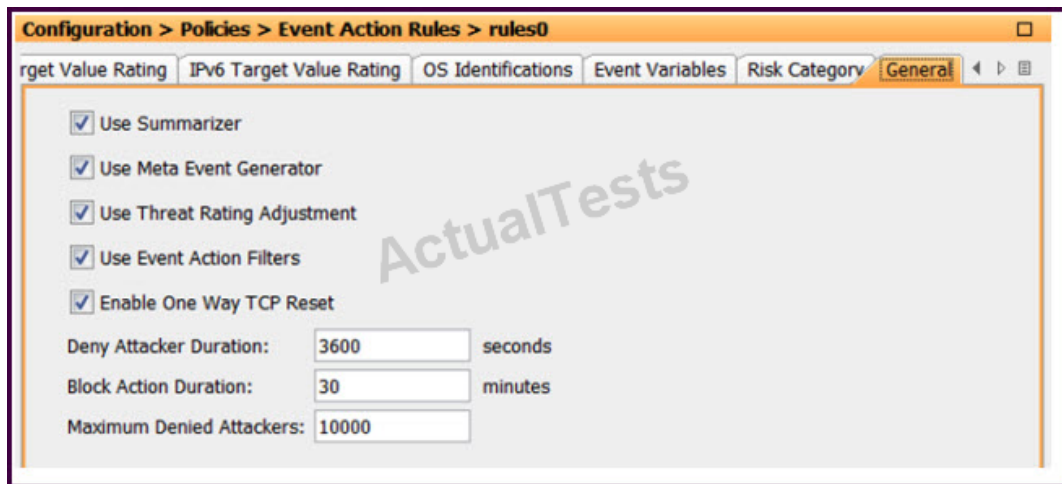

Which three statements are true? (Choose three.)

- A.** Triggered inline blocks will last for 1 hour while triggered requests for external systems to block will last for 30 minutes.
- B.** Triggered inline blocks will last for 30 minutes while triggered requests for external systems to block will last for 1 hour.
- C.** TCP Resets will only be sent to the victim IP address.
- D.** TCP Resets will only be sent to the attacker IP address.
- E.** The IPS appliance can be configured to ignore scanning events sourced from the organization network management system.
- F.** An alert risk rating will be calculated from the base value of the threat rating reduced by a value corresponding to the preventative actions taken by the IPS appliance.

Answer: A,C,E

Explanation:

QUESTION NO: 102

The default virtual sensor on all IPS appliances is vs0. Which three components are assigned to vs0 by default? (Choose three.)

- A. sig0
- B. engine0
- C. rules0
- D. ad0
- E. filters0
- F. gc0

Answer: A,C,D

Explanation:

QUESTION NO: 103

Which three statements about the Cisco IPS appliance anomaly detection feature are true? (Choose three.)

- A. The scanner threshold is used to detect a single scanner.
- B. Once the multiple scanners alert is triggered, the learning period will begin.
- C. The histogram is used to detect multiple scanners.
- D. Once a scanner threshold is violated, an alert is triggered for the multiple scanner signature.
- E. The illegal zone should contain non-allocated internal IP addresses.
- F. The traffic anomaly signature engine contains only two anomaly detection signatures (signature ID 13000 and 13001).

Answer: A,C,E

Explanation:

QUESTION NO: 104

Which four data strings will match the regular expression `c[a-z]*sc[0-4]+?` (Choose four.)

- A. Cisc0
- B. Francisc0123456789
- C. Ciscocisc0
- D. SanFrancisco44
- E. SanFranciscosc00L
- F. csc0123456780

Answer: B,C,E,F

Explanation:

QUESTION NO: 105

The Cisco IDM Custom Signature Wizard asks you to select between the protocol types IP, ICMP, UDP, and TCP under which circumstance?

- A. when you specify the String engine
- B. when you specify the Service engine
- C. when you specify the Atomic engine
- D. when you specify the String or Service engine
- E. when you do not select a specific engine

Answer: E

Explanation:

QUESTION NO: 106

Regarding the Cisco IPS NME, when should the heartbeat reset be disabled on the ISR?

- A. when performing an upgrade on the ISR
- B. when the NME is used in inline mode
- C. when the NME is used in promiscuous mode
- D. when the NME is used in fail-open mode
- E. when the NME is used in fail-closed open mode
- F. when performing an upgrade on the NME

Answer: F

Explanation:

QUESTION NO: 107

Which three IPS alert actions are available in promiscuous mode? (Choose three.)

- A. reset tcp connection
- B. request block host
- C. deny packet
- D. deny connection
- E. send snmp inform
- F. log pair packets

Answer: A,B,F

Explanation:

QUESTION NO: 108

Which Cisco IPS appliance feature uses profile-based intrusion detection?

- A. profiler
- B. anomaly detection
- C. threat detection
- D. netflow
- E. reputation filter
- F. senderbase

Answer: B

Explanation:

QUESTION NO: 109

Which two statements are true regarding the Cisco IPS appliance traffic normalizer? (Choose two.)

- A. It only operates in inline mode.
- B. It operates in one of three modes: symmetric, loose, or asymmetric.
- C. It can help prevent false negatives that are caused by evasions.
- D. It can help ensure that Layer 7 traffic conforms to its protocol specifications.
- E. It will not modify fragmented IP traffic.

Answer: A,C

Explanation:

QUESTION NO: 110

Numerous attacks using duplicate packets, changed packets, or out-of-order packets are able to successfully evade and pass through the Cisco IPS appliance when it is operating in inline mode. What could be causing this problem?

- A. The IPS Application Inspection and Control is disabled.
- B. All the DoS signatures are disabled.

- C. All the reconnaissance signatures are disabled.
- D. TCP state bypass is enabled.
- E. The normalizer is set to asymmetric mode.

Answer: E

Explanation:

QUESTION NO: 111

Refer to the exhibit.

The screenshot shows the 'All Signatures' pane in the Cisco IPS configuration interface. The table lists various signatures with their IDs, names, enabled status, severity, fidelity, base rate, and actions. The 'Advanced...' button is highlighted at the bottom of the pane.

ID	Name	Enabled	Severity	Fidelity Rating	Base RR	Signature Actions
						Alert and Log Deny Other
1000/0	IP options-Bad Option List	☒	Inform	75	18	Alert
1001/0	IP options-Record Packet Route	☐	Inform	100	25	Alert
1002/0	IP options-Timestamp	☐	Inform	100	25	Alert
1003/0	IP options-Provide s,c,h,tcc	☐	Inform	100	25	Alert
1004/0	IP options-Loose Source Route	☐	High	100	100	Alert
1005/0	IP options-SATNET ID	☐	Inform	100	25	Alert
1006/0	IP options-Strict Source Route	☒	High	100	100	Alert
1007/0	IPv6 over IPv4 or IPv6	☐	Inform	100	25	Alert
1101/0	Unknown IP Protocol	☒	Inform	75	18	Alert
1102/0	Impossible IP Packet	☒	High	100	100	Alert
1104/0	IP Localhost Source Spoof	☒	High	100	100	Alert
1107/0	RFC 1918 Addresses Seen	☐	Inform	100	25	Alert
1108/0	IP Packet with Proto 11	☐	High	100	100	Alert
1109/0	Cisco IOS Interface DoS	☐	Medium	75	56	Alert
1109/1	Cisco IOS Interface DoS	☐	Medium	75	56	Alert
1109/2	Cisco IOS Interface DoS	☐	Medium	75	56	Alert
1109/3	Cisco IOS Interface DoS	☐	Medium	75	56	Alert
1200/0	IP Fragmentation Buffer Full	☒	Inform	100	25	Alert Packet
1201/0	IP Fragment Overlap	☐	Inform	100	25	Alert Packet
1202/0	IP Fragment Overrun - Datagram Too Long	☒	High	100	100	Alert Packet
1203/0	IP Fragment Overwrite - Data is Overwritten	☒	High	100	100	Alert Packet
1204/0	IP Fragment Missing Initial Fragment	☒	Inform	100	25	Alert Packet

Total Signatures: 4739 Enabled Signatures: 2077

Buttons: Apply, Reset, Advanced...

When viewing the All Signatures pane, clicking on the Advanced option can be used to enable which two IPS configurations? (Choose two.)

- A. normalizer mode
- B. signature variables
- C. HTTP and FTP AIC
- D. network participation mode
- E. event action overrides
- F. event action filters

Answer: B,C

Explanation:

QUESTION NO: 112

The Cisco IPS appliance anomaly detection signatures cover which three protocols? (Choose three.)

- A. TCP
- B. ICMP
- C. UDP
- D. NETBIOS
- E. IP
- F. other

Answer: A,C,F

Explanation:

QUESTION NO: 113

When the Cisco IPS appliance is operating in inline mode, what is the default event actions rule?

- A. All alert events with a risk rating of 75 or higher will have a default action of deny packet inline.
- B. All alert events with a risk rating of 75 or higher will have a default action of deny attacker inline.
- C. High risk category attacks will have a default action of deny packet inline.
- D. High risk category attacks will have a default action of deny attacker inline.
- E. Attacks to any of the mission critical resources will have a default action of deny packet inline.
- F. Attacks to any of the mission critical resources will have a default action of deny attacker inline.

Answer: C

Explanation:

QUESTION NO: 114

In tuning a Cisco IPS signature, you need to edit the regexp string of the Cisco IPS signature, but when editing the signature, the regexp string of the signature cannot be edited. What should you do?

- A. Create a new custom signature, then disable the original signature.

- B.** Log in to the IPS appliance using a service account, which allows you to edit the regexp string of the signature.
- C.** Clone the signature, then edit the cloned signature, then disable the original signature.
- D.** Disable the signature first; then you can edit the regexp string of the signature and then re-enable the signature.

Answer: C

Explanation:

QUESTION NO: 115

Which three Cisco IPS sensor features are configured within an event action rule? (Choose three.)

- A.** event action overrides
- B.** target value rating
- C.** use global correlation
- D.** use reputation filter
- E.** event action filters
- F.** enable TCP state bypass
- G.** blocking properties

Answer: A,B,E

Explanation:

QUESTION NO: 116

Which three statements about the Cisco IPS appliance Event Store are true? (Choose three.)

- A.** The Event Store is accessible through the CLI, Cisco IDM, Cisco ASDM, or SDEE.
- B.** The Event Store is a circular, first-in first-out buffer.
- C.** The Event Store can be configured to be located on a remote server.
- D.** The size of the Event Store depends on the Cisco IPS appliance platform.
- E.** Each virtual sensor has its own Event Store.
- F.** If the Event Store is full, the Cisco IPS appliance performs an automatic graceful shutdown.

Answer: A,B,D

Explanation:

QUESTION NO: 117

Which application within the Cisco IPS appliance can modify the configurations of other devices on the network?

- A. SDEE
- B. POSFP
- C. ARC
- D. global correlation
- E. reputation filter
- F. anomaly detection

Answer: C

Explanation:

QUESTION NO: 118

Refer to the exhibit.

```
switch#show monitor
```

```
Session 1
```

```
-----
```

```
Type : Local Session
```

```
Source Ports :
```

```
Both : Fa1/0/10-15
```

```
Destination Ports : Fa1/0/1
```

```
Encapsulation : Native
```

```
Ingress : Disabled
```

```
switch#show interface FastEthernet 1/0/1
```

```
FastEthernet1/0/1 is up, line protocol is down (monitoring)
```

```
Hardware is Fast Ethernet, address is 0026.0011.2233
```

```
Description: *** IPS 4240 port ***
```

```
MTU 1500 bytes, BW 100000 Kbit, DLY 100 usec,
```

```
reliability 255/255, txload 8/255, rxload 1/255
```

```
Encapsulation ARPA, loopback not set
```

```
Keepalive set (10 sec)
```

```
Full-duplex, 100Mb/s, media type is 10/100BaseTX
```

```
input flow-control is off, output flow-control is unsupported
```

```
ARP type: ARPA, ARP Timeout 04:00:00
```

```
Last input never, output 1w1d, output hang never
```

```
Last clearing of "show interface" counters never
```

```
Input queue: 0/75/0/0 (/max/drops/flushes); Total output drops: 854183
```

```
Queueing strategy: fifo
```

```
Output queue: 0/0 (/max)
```

```
5 minute input rate 0 bits/sec, 0 packets/sec
```

```
5 minute output rate 3169000 bits/sec, 904 packets/sec
```

```
0 packets input, 0 bytes, 0 no buffer
```

```
Received 0 broadcasts (0 multicasts)
```

```
0 runts, 0 giants, 0 throttles
```

```
0 input errors, 0 CRC, 0 frame, 0 overrun, 0 ignored
```

```
0 watchdog, 0 multicast, 0 pause input
```

```
0 input packets with dribble condition detected
```

```
14551920935 packets output, 6904895972614 bytes, 0 underruns
```

```
0 output errors, 0 collisions, 1 interface resets
```

```
0 babbles, 0 late collision, 0 deferred
```

```
0 lost carrier, 0 no carrier, 0 PAUSE output
```

```
0 output buffer failures, 0 output buffers swapped out
```

A Cisco IPS appliance is connected to the FastEthernet 1/0/1 switch port. Referring to the switch show outputs shown below, what can be determined about the Cisco IPS appliance operations?

- A. The Cisco IPS appliance is operating in inline interface mode.
- B. A lot of traffic is bypassing the IPS appliance.
- C. The IPS appliance is dropping a lot of traffic inline.
- D. The IPS appliance is experiencing many false positive alerts.

E. The IPS appliance sensing interface that is connected to the FastEthernet 1/0/1 switch port is shut down.

Answer: B

Explanation:

QUESTION NO: 119

A Cisco IPS appliance running in a network environment with asymmetrical traffic flow is experiencing many false positive alerts that are triggered by the 13000 signature ID. What can the IPS administrator tune on the IPS to reduce the false positives?

- A. set the normalizer mode to strict mode
- B. set the AD operational mode to inactive
- C. enable TCP state bypass
- D. increase the default scanner threshold
- E. disable the uRPF check

Answer: B

Explanation:

QUESTION NO: 120

Which Cisco IPS appliance signature engine uses signature events as input to correlate different signatures into a higher level event?

- A. Atomic signature engine
- B. Service signature engine
- C. Meta signature engine
- D. Sweep signature engine
- E. Multistring signature engine
- F. Normalizer signature engine

Answer: C

Explanation:

QUESTION NO: 121

Referring to the monitor session 1 destination GigabitEthernet0/47 ingress Cisco Catalyst switch

command, what does the "ingress" command option enable?

- A. Allow the capture of bidirectional traffic on the GigabitEthernet0/47 switch port.
- B. Add .1Q headers on the SPAN port (GigabitEthernet0/47) to indicate the source VLAN to the Cisco IPS appliance in promiscuous mode.
- C. Allow the SPAN port (GigabitEthernet0/47) to be a source of traffic (for TCP resets).
- D. Enable flow-based SPAN session.
- E. Limit (filter) SPAN source traffic.

Answer: C

Explanation:

QUESTION NO: 122

The Cisco IPS sensor can obtain operating system identification data from which two sources? (Choose two.)

- A. passive operating system fingerprinting
- B. imported from Cisco SensorBase
- C. imported from Cisco Security MARS
- D. manual operating system mappings configured on the Cisco IPS appliance
- E. imported from Cisco Secure Desktop OS scan

Answer: A,D

Explanation:

QUESTION NO: 123

From Cisco Security Manager, which external component or service is used to access in-depth signature information?

- A. Cisco SensorBase
- B. Cisco Security MARS
- C. Cisco IntelliShield Service
- D. ScanSafe Service

Answer: C

Explanation:

QUESTION NO: 124

Which mode consolidates alarms where the Cisco IPS appliance will generate an alert the first time that a signature fires on an address set and then only send a summary alert for all address sets over a given time interval?


- A. Fire Once
- B. Fire All
- C. Fire Summarize
- D. Summarize
- E. Global Summarize

Answer: E

Explanation:

QUESTION NO: 125

Refer to the exhibit.

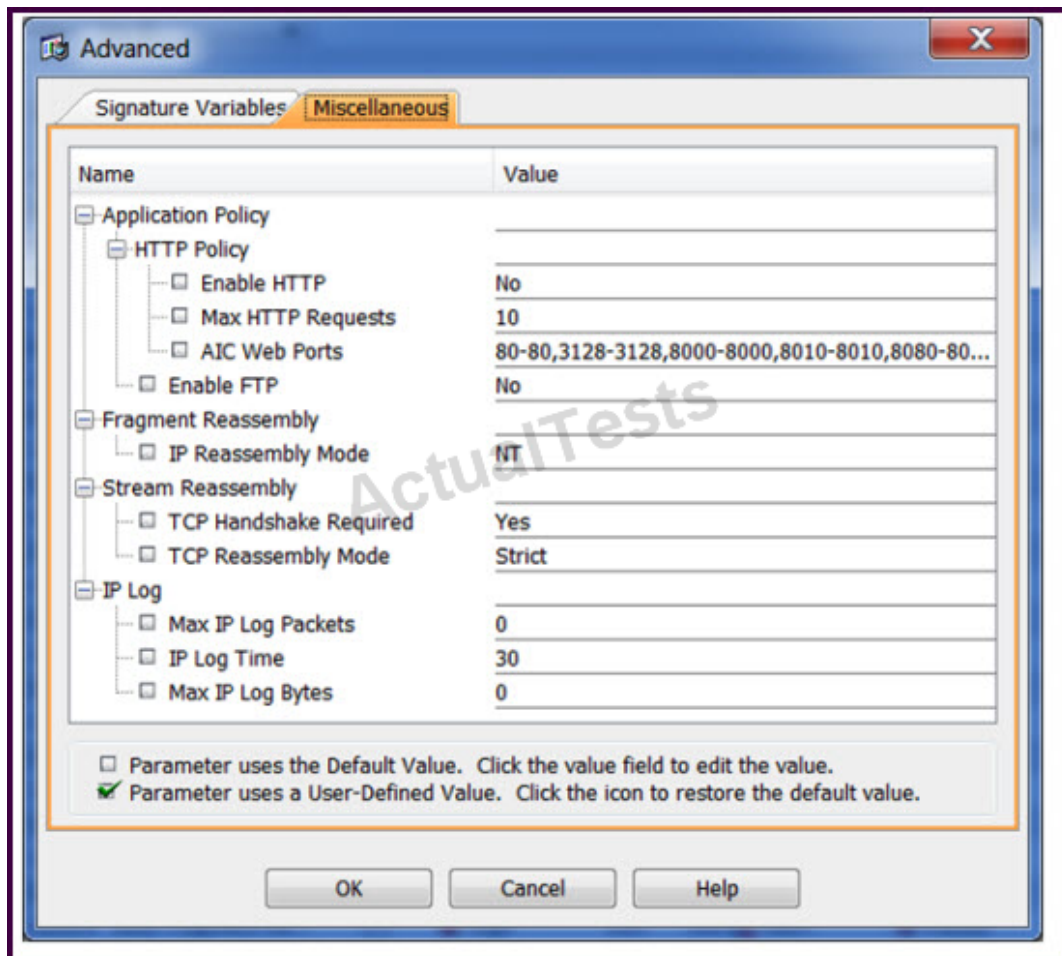

Which option is affected by the IP Log parameters?

- A. the syslog operations of the Cisco IPS appliance
- B. the signature logging action
- C. SNMP trap operations
- D. the signature produce verbose alert action
- E. the SDEE operations of the Cisco IPS appliance

Answer: B

Explanation:

QUESTION NO: 126

Refer to the exhibit.

The screenshot shows a web-based configuration interface for a Cisco IPS appliance. The breadcrumb navigation at the top reads "Configuration > Interfaces > Traffic Flow Notifications". Below this, a descriptive paragraph explains the sensor's function: "You can configure the sensor to monitor the flow of packets across an interface and send notification if that flow changes during a specified interval. The sensor monitors the percentage of missed packets during a specified notification interval and issues a status event if the percentage of missed packets exceeds the Missed Packets Threshold. The sensor also issues a status event if the interface remains idle and does not receive packets for a specified amount of time." Below the text are three configuration fields: "Missed Packets Threshold:" with a value of "2" and unit "percent"; "Notification Interval:" with a value of "30" and unit "seconds"; and "Interface Idle Threshold:" with a value of "30" and unit "seconds". At the bottom of the form are two buttons: "Apply" and "Reset". A large, semi-transparent watermark "ActualTests" is overlaid diagonally across the center of the configuration area.

Configuring traffic flow notifications on the Cisco IPS appliance is most useful in what situation?

- A. to determine the IPS throughput rate when using inline mode
- B. to detect IPS performance issues
- C. to enable bypass mode when the Cisco IPS appliance fails
- D. to prevent DoS attacks

Answer: B

Explanation:

QUESTION NO: 127

When setting up a Cisco IPS appliance in promiscuous mode, which Cisco Catalyst switch command is used to display information about all SPAN and remote SPAN sessions on the switch?

- A. show span
- B. show sessions
- C. show interface
- D. show monitor

Answer: D

Explanation:

QUESTION NO: 128

What about this configuration command is true: ips inline fail-open sensor sensor_name?

- A. will enable fail-open hardware bypass on the Cisco IPS 4200 Series appliance
- B. will enable inline operation on the Cisco IPS 4200 Series appliance
- C. will enable inline operation on the Cisco IDSM-2, IPS AIM, or IPS NME
- D. will enable the desired traffic to be diverted from the Cisco ASA to one of the Cisco ASA AIP-SSM virtual sensors

Answer: D

Explanation:

QUESTION NO: 129

Which parameter is used to configure a signature to fire if the activity it detects happens a certain number of times for the same address set within a specified period of time?

- A. event action
- B. event counter
- C. summary count
- D. summary key

Answer: B

Explanation:

QUESTION NO: 130

What is the maximum number of virtual sensors that a Cisco IPS 4200 Series appliance can support?


- A. depends on the Cisco IPS 4200 Series appliance model
- B. 2
- C. 3
- D. 4
- E. 5
- F. 6

Answer: D

Explanation:

QUESTION NO: 131

Refer to the exhibit.

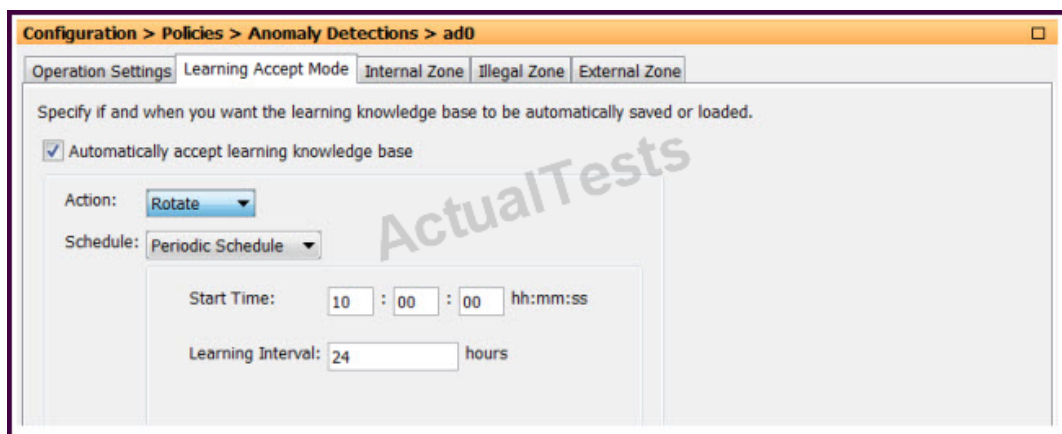

What does an action of Rotate indicate?

- A. A new knowledge base is created, but is not loaded. You can view it to decide if you want to load it.
- B. A new knowledge base is created and loaded.
- C. The knowledge base is rolled back to the previous version.

D. The knowledge base is rotated on a periodic schedule using the different existing knowledge bases.

Answer: B

Explanation:

QUESTION NO: 132

Reports generated by Cisco IME can be saved in which two formats? (Choose two.)

- A.** PDF
- B.** XLS
- C.** RTF
- D.** HTML
- E.** XML
- F.** DOC

Answer: A,C

Explanation:

QUESTION NO: 133

Which three configurations are the defaults on the Cisco IPS 4200 Series appliance? (Choose three.)

- A.** IPS appliance default IP address = 192.168.1.2 and default gateway = 192.168.1.1
- B.** password recovery enabled
- C.** TLS and SSL access disabled
- D.** Telnet access disabled
- E.** Web Server Port = 80

Answer: A,B,D

Explanation:

QUESTION NO: 134

Which Cisco IPS appliance CLI command is used to display information in the IPS Event Store?

- A. show config
- B. show events
- C. show database
- D. show sdee
- E. show log
- F. show event-store
- G. show alerts

Answer: B

Explanation:

QUESTION NO: 135

With a Cisco IPS appliance running v7.0, which three event actions support IPv4 and IPv6?
(Choose three.)

- A. log attacker/victim pair packets
- B. request block connection
- C. request rate limit
- D. reset TCP connection
- E. modify packet inline
- F. request block host

Answer: A,D,E

Explanation:

QUESTION NO: 136

Which two statements accurately describe virtual sensor operations on the Cisco IPS appliance?
(Choose two.)

- A. You must create a new instance of a signature set for each new virtual sensor.
- B. The packet processing policy is virtualized.
- C. Creating a new virtual sensor creates a "virtual" machine on the Cisco IPS appliance.
- D. vs0 can be cloned then deleted.
- E. Each virtual sensor can have its own unique event action rules.

Answer: B,E

Explanation:

QUESTION NO: 137

When using the Cisco IPS signature and engine auto updates feature from Cisco.com, which password must be configured on the IDM Auto/Cisco.com Update pane?

- A. the IPS appliance "cisco" user account password
- B. the IPS appliance "service" user account password
- C. the IPS appliance "support" user account password
- D. the IPS appliance enable password
- E. the CCO user account password

Answer: E

Explanation:

QUESTION NO: 138

Which three statements are true with respect to IPS false positives? (Choose three.)

- A. An example of a false positive is when the IPS appliance produces an alert in response to the normal activities of the company's network management system.
- B. Increasing the set of TCP ports that a signature matches on may reduce false positives.
- C. False positives may be reduced by disabling certain signatures.
- D. Event action filters can be implemented to reduce false positives.
- E. An example of a false positive is the IPS not reacting to a successful denial of service attack.

Answer: A,C,D

Explanation:

QUESTION NO: 139

Which rating is determined by adjusting the risk rating with respect to preventative actions taken by the sensor?

- A. attack severity rating
- B. attack relevancy rating
- C. damage assessment rating
- D. hazard rating
- E. threat rating
- F. event action delta

Answer: E

Explanation:

QUESTION NO: 140

Passive operating system fingerprinting can be used to determine which aspect of the event risk rating?

- A. target value rating
- B. watch list rating
- C. signature fidelity rating
- D. attack severity rating
- E. promiscuous delta
- F. attack relevancy rating

Answer: F

Explanation:

QUESTION NO: 141

What is the maximum number of virtual sensors that can be configured on a Cisco IPS 4260 Sensor appliance?

- A. 2
- B. 4
- C. 6
- D. 8
- E. 16
- F. There is no fixed limit.

Answer: B

Explanation:

QUESTION NO: 142

Which Cisco IPS appliance feature has the following three potential settings: off, partial, and full?

- A. anomaly detection
- B. POSFP
- C. reputation filtering
- D. global correlation network participation
- E. event action overrides

Answer: D

Explanation:

QUESTION NO: 143

Defining the internal zone, external zone, and illegal zone is associated with which Cisco IPS appliance feature?

- A. reputation filtering
- B. threat detection
- C. event action overrides
- D. global correlation network participation
- E. threat rating adjustments
- F. anomaly detection

Answer: F

Explanation:

QUESTION NO: 144

Which two are the functions of the learning feature of anomaly detection within a Cisco IPS appliance? (Choose two.)

- A. observes actual traffic patterns to the zones
- B. retrieves zero-day attack information from the Cisco SIO
- C. dynamically populates the host operating system database
- D. allows false-positive training by an IPS administrator
- E. builds the host reputation histogram
- F. learns which legitimate services have a scanning behavior

Answer: A,F

Explanation:

QUESTION NO: 145

Regarding the Cisco IPS appliance anomaly detection feature, which two of these would be considered scan events? (Choose two.)

- A. an unacknowledged TCP SYN
- B. an online dictionary password attack
- C. exhaustive directory tree traversal on an FTP server
- D. a scan of all TCP ports on a single destination IP address
- E. a unidirectional UDP session

Answer: A,E

Explanation:

QUESTION NO: 146

Which two are valid examples of String engines? (Choose two.)

- A. String HTTP
- B. String FTP
- C. String TCP
- D. String UDP
- E. String Trojan
- F. String IP

Answer: C,D

Explanation:

QUESTION NO: 147

Which two operations would put an inline Cisco IPS sensor in detection mode? (Choose two.)

- A. subtract all aggressive actions using event action filters
- B. decrease the event count using event action filters
- C. increase the maximum inter-event interval using event action overrides
- D. remove the default event action override, which drops traffic with a risk rating of 90 to 100
- E. enable anomaly detection in detection mode only

Answer: A,D

Explanation:

QUESTION NO: 148

What are the five possible values for the event count key parameter of an IPS signature? (Choose five.)

- A. attacker address
- B. victim address
- C. attacker and victim address
- D. victim address and port
- E. attacker and victim addresses and ports
- F. attacker address and victim port
- G. attacker and victim port

Answer: A,B,C,E,F

Explanation:

QUESTION NO: 149

Which protocol or protocols does the Cisco Security Manager use to communicate with the Cisco IPS appliance?

- A. HTTPS only
- B. SSH only
- C. SNMPv3 only
- D. HTTPS and SNMPv3
- E. HTTPS and SSH
- F. HTTPS, SSH, and SNMPv3

Answer: A

Explanation:

QUESTION NO: 150

The Cisco IPS appliance passive OS fingerprinting feature can use which three sources to determine the OS mappings information? (Choose three.)

- A. manually configured OS mappings

- B. OS mappings that are dynamically learned by the sensor through the fingerprinting of TCP packets with the SYN control bit set
- C. OS mappings information received from the Cisco Security Manager
- D. imported OS mappings from the Management Center for Cisco Security Agents
- E. OS mappings information learned by running Nessus scans

Answer: A,B,D

Explanation:

QUESTION NO: 151

Which Cisco IPS signature parameter can be tuned to reduce the volume of the alerts that are written to the event store?

- A. alert action
- B. alert frequency
- C. alert fidelity rating
- D. alert severity
- E. alert firing mode
- F. alert logging

Answer: B

Explanation:

QUESTION NO: 152

Which IPS appliance inline deployment mode should be used to support the following requirements?

- The IPS appliance will be installed in inline mode, on a dot1q trunk.
- VLANs 10, 20, 30, 40, and 50 exist on the dot1q trunk.
- Requirement is to inspect all VLANs except VLAN 50 with the IPS appliance.

- A. inline VLAN pair mode
- B. inline interface mode
- C. inline VLAN group mode
- D. inline trunk mode
- E. inline subinterface mode

Answer: C

Explanation: