


Cisco 642-883

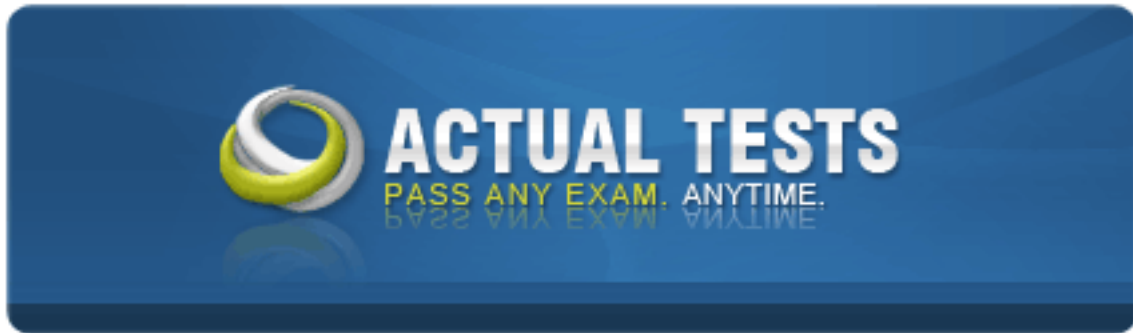

**Deploying Cisco Service Provider Network Routing
(SPROUTE)
Version: 4.1**

QUESTION NO: 1

Refer to the OSPF command exhibit.

```
RP/0/RSP0/CPU0:P1(config-ospf)#area 1 stub no-summary
```

Which effect does the no-summary command option have?

- A. It will cause area 1 to be able to receive non-summarized inter-area routes.
- B. It will cause area 1 to not receive any inter-area routes and will use a default route to reach networks in other areas.
- C. It will cause area 1 to not receive any external routes and will use a default route to reach the external networks.
- D. It will convert the NSSA area into a NSSA totally stubby area.
- E. It will convert the stubby area into a NSSA.
- F. It will disable OSPF auto-summary.

Answer: B

Explanation:

QUESTION NO: 2

When troubleshooting OSPF neighbor errors, which three verification steps should be considered? (Choose three.)

- A. Verify if neighboring OSPF interfaces are configured in the same area.
- B. Verify if neighboring OSPF interfaces are configured with the same OSPF process ID.
- C. Verify if neighboring OSPF interfaces are configured with the same OSPF priority.
- D. Verify if neighboring OSPF interfaces are configured with the same hello and dead intervals.
- E. Verify if neighboring OSPF interfaces are configured with the same area type.

Answer: A,D,E

Explanation:

QUESTION NO: 3

On Cisco IOS XR Software, which set of commands is used to enable the gi0/0/0/1 interface for OSPF in area 0?

A. interface gi0/0/0/0
ip address 10.1.1.1 255.255.255.0
!
router ospf 1
network 10.1.1.1 0.0.0.0 area 0

B. interface gi0/0/0/0
ip address 10.1.1.1 255.255.255.0
!
router ospf 1
network 10.1.1.1 255.255.255.255 area 0

C. router ospf 1
area 0
interface GigabitEthernet0/0/0/1

D. interface gi0/0/0/0
ip address 10.1.1.1 255.255.255.0
ip ospf 1 area 0

E. router ospf 1
address-family ipv4 unicast
interface GigabitEthernet0/0/0/1 area 0

F. router ospf 1
address-family ipv4 unicast
interface GigabitEthernet0/0/0/1
area 0

Answer: C

Explanation:

QUESTION NO: 4

Which three statements are true regarding the OSPF router ID? (Choose three.)

- A.** The OSPF routing process chooses a router ID for itself when it starts up.
- B.** The router-id command is the preferred procedure to set the router ID.
- C.** If a loopback interface is configured, its address will always be preferred as the router ID over any other methods.
- D.** After the router ID is set, it does not change, even if the interface that the router is using for the router ID goes down. The router ID changes only if the router reloads or if the OSPF routing process restarts.
- E.** In OSPF version 3, the OSPF router ID uses a 128-bit number.

Answer: A,B,D

Explanation:

QUESTION NO: 5

Which two OSPF network scenarios require OSPF virtual link configuration? (Choose two.)

- A. to connect an OSPF non-backbone area to area 0 through another non-backbone area
- B. to connect an NSSA area to an external routing domain
- C. to connect two parts of a partitioned backbone area through a non-backbone area
- D. to enable route leaking from Level 2 into Level 1
- E. to enable route leaking from Level 1 into Level 2
- F. to enable OSPF traffic engineering

Answer: A,C

Explanation:

QUESTION NO: 6

What is function of the RP/0/RSP0/CPU0:PE1(config-ospf)#distance Cisco IOS-XR command?

- A. To modify the administrative distance of the OSPF routes
- B. To modify the default seed metric of the OSPF external routes
- C. To modify the OSPF default reference bandwidth
- D. To modify the OSPF cost

Answer: A

Explanation:

QUESTION NO: 7

Which four statements are correct regarding IS-IS operations? (Choose four.)

- A. By default, Level 1 routers within an IS-IS area do not carry any routing information external to the area to which they belong. They use a default route to exit the area.
- B. Summarization should be configured on the Level 2 routers, which injects the Level 2 routes into Level 1.
- C. IS-IS supports "route leaking" in which selected Level 2 routes can be advertised by a Level 1/Level 2 router into Level 1.
- D. The IS-IS backbone is a contiguous collection of Level 1 capable routers, each of which can be in a different area.

- E.** With IS-IS, an individual router is in only one area, and the border between areas is on the link that connects two routers that are in different areas.
- F.** Cisco IOS XR Software supports multitopology for IPv6 IS-IS unless single topology is explicitly configured in IPv6 address-family configuration mode.

Answer: A,C,E,F

Explanation:

QUESTION NO: 8

When configuring IPv4 and IPv6 IS-IS routing on Cisco IOS XR routers, which three statements are correct? (Choose three.)

- A.** By default, a single SPF is used for both IPv4 and IPv6, so the IPv4 and IPv6 topology should be the same.
- B.** By default, the IS-IS router type is Level 1 and Level 2.
- C.** All IS-IS routers within the same IS-IS area must be configured with the same IS-IS routing process instance ID.
- D.** By default, metric-style narrow is used.
- E.** By default, the IS-IS interface circuit type is Level 1 and Level 2.
- F.** The area IS-IS address-family configuration command is used to specify the IS-IS area address.

Answer: B,D,E

Explanation:

QUESTION NO: 9

Refer to the PE1 router routing table output exhibit.

```
RP/0/RSP0/CPU0:PE1#show route ipv4 isis
```

```
<output omitted>
```

```
i su 10.1.10.0/24 [115/30] via 0.0.0.0, 00:40:34, Null0
```

```
i L1 10.1.10.1/32 [115/30] via 192.168.101.11, 00:42:39, GigabitEthernet0/0/0/0
```

```
i L1 10.1.10.2/32 [115/24] via 192.168.112.21, 00:44:40, GigabitEthernet0/0/0/1
```

```
i L1 10.1.10.3/32 [115/32] via 192.168.113.22, 00:38:23, GigabitEthernet0/0/0/2
```

```
i L1 10.1.10.4/32 [115/22] via 192.168.114.23, 00:14:10, GigabitEthernet0/0/0/3
```

```
<output omitted>
```

What is causing the

i su 10.1.10.0/24 [115/30] via 0.0.0.0, 00:40:34, Null0 entry on the PE1 router routing table?

- A.** The PE1 router is receiving the 10.1.10.0/24 summary route from the upstream L1/L2 IS-IS router.
- B.** The PE1 router has been configured to summarize the 10.1.10.x/32 IS-IS routes to 10.1.10.0/24.
- C.** The 10.1.10.0/24 has been suppressed because IS-IS auto-summary has been disabled on the PE1 router.
- D.** The 10.1.10.0/24 has been suppressed because of a route policy configuration on the PE1 router.
- E.** The 10.1.10.0/24 has been suppressed because the more specific 10.1.10.x/32 IS-IS routes have been configured to leak into the IS-IS non-backbone area.

Answer: B

Explanation:

QUESTION NO: 10

In comparing IS-IS with OSPF, a Level-1-2 IS-IS router is similar to which kind of OSPF router?


- A.** ASBR on a normal OSPF area
- B.** ASBR on NSSA
- C.** ABR on totally stubby OSPF area
- D.** ABR on stubby OSPF area
- E.** ABR on a normal OSPF area

Answer: C

Explanation:

QUESTION NO: 11

Refer to the topology diagram in the exhibit.

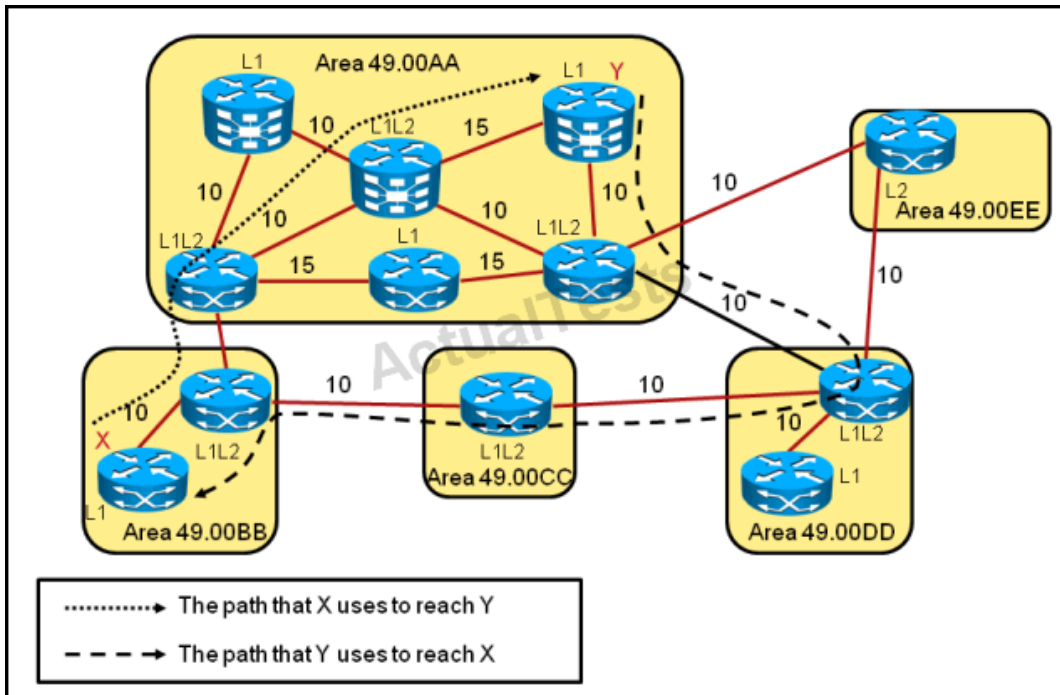

Which IS-IS feature could be implemented so that the return path for the packets from router Y in area 49.00AA to router X in area 49.00BB will use the more optimal path?


- A. Enable route leaking to pass Level 2 information into the Level 1 routers.
- B. Change the area 49.00AA type from a stub area to a regular area.
- C. Change the IS-IS administrative distance on router Y in area 49.00AA.
- D. Change the IS-IS metric type from narrow to wide on all IS-IS routers.

Answer: A

Explanation:

QUESTION NO: 12

Refer to the exhibit.

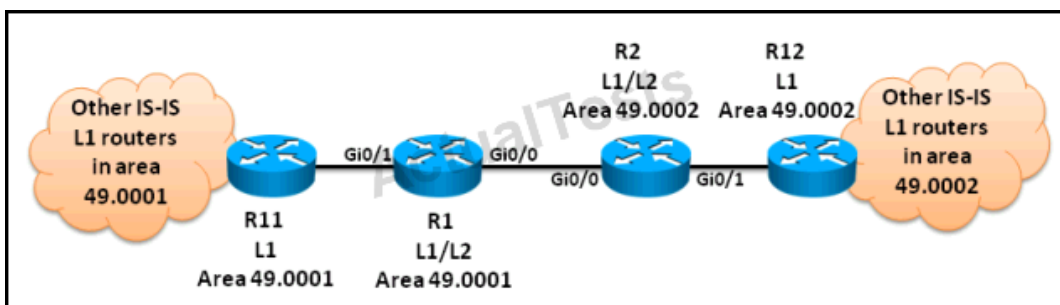

Which two configuration options can be used to optimize the IS-IS network scenario? (Choose

two.)

- A. Change the R1 and R2 IS type to Level 2.
- B. Change the R1 and R2 IS type to Level 1.
- C. Change the gi0/0 interface IS-IS circuit type on R1 and R2 to Level 2 only.
- D. Change the gi0/1 interface IS-IS circuit type on R1 and R2 to Level 1.
- E. Change the IS type for all the routers to Level-1-2.
- F. Change the IS-IS network type for all the routers to point-to-point.

Answer: C,D

Explanation:

QUESTION NO: 13

The Cisco IOS XE Software summary-address router IS-IS configuration command can be used to send a summarized route into which IS-IS hierarchy?

- A. Level 1 only
- B. Level 2 only
- C. Level-1-2 only
- D. Level 1 or Level 2 or Level-1-2

Answer: D

Explanation:

QUESTION NO: 14

Refer to the Cisco IOS XE IS-IS configuration exhibit.


```
interface GigabitEthernet0/0/0
ip address 192.168.104.40 255.255.255.0
ip router isis
ipv6 address 2001:DB8:192:168:104::40/80
ipv6 enable
ipv6 router isis
!
interface GigabitEthernet0/0/1
ip address 192.168.134.40 255.255.255.0
ip router isis
ipv6 address 2001:DB8:192:168:134::40/80
ipv6 enable
ipv6 router isis
!
router isis 1
net 49.0004.0100.0400.1001.00
summary-address 10.4.10.0 255.255.255.0
!
```

What are two problems with the configuration that are causing the IPv4, or the IPv6, or the IPv4 and IPv6 IS-IS operations to fail? (Choose two.)

- A. The configuration is missing the interface gi0/0 and interface gi0/0 commands under router isis 1.
- B. The configuration is missing the address-family ipv4 unicast and address-family ipv6 unicast commands under router isis 1.
- C. IPv6 unicast routing has not been enabled globally on the Cisco IOS XE router.
- D. The gi0/0 and gi0/1 interfaces are not participating in the router isis 1 routing instance.
- E. Multitopology IS-IS must be enabled to support both IPv4 and IPv6.
- F. Another router isis instance must be enabled to support IPv6.

Answer: C,D

Explanation:

QUESTION NO: 15

In which network environment is IS-IS adjacency check important?

- A. in a multitopology environment where there are different instances of IS-IS running on the same router
- B. in an IPv4/IPv6 environment and running single-topology IS-IS

- C. when a level L1/L2 IS-IS router is neighboring with a Level 1 only or Level 2 only router
- D. when IS-IS neighbors are in an NBMA environment like over Frame Relay
- E. when IS-IS neighbors are in a broadcast environment like an Ethernet LAN

Answer: B

Explanation:

QUESTION NO: 16

Refer to the IS-IS configuration exhibit.

```
router isis 1
 net 49.0001.0100.0100.1001.00
 address-family ipv4 unicast
 !
 address-family ipv6 unicast
 single-topology
 !
 interface gi0/0/0/0
 address-family ipv4 unicast
 !
 address-family ipv6 unicast
```

This is the typical IS-IS configuration of the routers in an AS using IS-IS as the IGP. This AS is in the transition phase of integrating IPv6 into the network. During this transition phase, some of the routers within the AS might be running IPv4 only, some might be running IPv6 only, and others might be running both IPv4 and IPv6. To avoid any black holes for the IPv6 traffic, which configuration change can be made?

- A. Disable IS-IS adjacency checks.
- B. Enable IPv6 adjacency over IPv4 IS-IS peering.
- C. Enable multi-topology IS-IS.
- D. Disable the IPv4 unicast address-family.
- E. Enable IS-IS wide metric to support the single-topology mode.

Answer: C

Explanation:

QUESTION NO: 17

When implementing OSPF, which type of networks require DR/BDR election?

- A. point-to-point networks
- B. multi-access broadcast networks
- C. non-broadcast multi-access networks (Hub and Spoke Frame Relay) using point-to-multipoint OSPF network type
- D. All networks type

Answer: B

Explanation:

QUESTION NO: 18

The S bit in the MPLS header is used for what purpose?

- A. To indicate the bottom level in the label stack
- B. To indicate if LDP is sync to the IGP
- C. To indicate if LDP is sync to the IGP
- D. To indicate the status of the LSP

Answer: A

Explanation:

QUESTION NO: 19

When implementing LDP, what is liberal label retention mode?

- A. To reduce the convergence time, the LSR will retain all the received labels in its LIB even if all the neighbor LSRs go down temporary
- B. The LSR can assign its own label for each destination network even though it has not been assigned a next hop label from the neighbor LSR
- C. The LSR will store the label received from the downstream LSRs in its LIB even if the downstream LSRs are not the next hop for the destination
- D. The LSR will not perform PHP if it is operating in liberal label retention mode

Answer: C

Explanation:

QUESTION NO: 20

When using the show bgp ipv6 unicast summary command to verify the IPv6 BGP session status with the IPv6 BGP peers, you noticed the "St/PfxRcd" status for one of the IPv6 BGP peers is in the "Active" state. What does the "Active" state indicate?

- A. The IPv6 BGP session has been established with the IPv6 BGP peer.
- B. The router is in the process of sending BGP routing updates to the IPv6 BGP peer.
- C. The router is in the process of establishing the IPv6 BGP session with the IPv6 BGP peer.
- D. The router is exchanging BGP notification messages with its IPv6 BGP peer.

Answer: C

Explanation:

QUESTION NO: 21

Which three BGP configuration groupings are supported on Cisco IOS XR Software? (Choose three.)

- A. peer-group
- B. af-group
- C. bgp-group
- D. session-group
- E. neighbor-group
- F. as-group

Answer: B,D,E

Explanation:

QUESTION NO: 22

Which AS path access list is used by a multihomed customer to only announce their own address space to their service providers to prevent the multihomed customer from becoming a transit AS?

- A. ip as-path access-list permit.*
- B. ip as-path access-list permit^\$
- C. ip as-path access-list permit _\$
- D. ip as-path access-list permit _^
- E. ip as-path access-list permit local-as
- ip as-path access-list deny *
- F. ip as-path access-list deny.*

ip as-path access-list permit *

Answer: B

Explanation:

QUESTION NO: 23

What is recursive lookup in BGP and how does it work?

- A.** The router looks up the EBGp route and the EBGp next hop to reach a destination in the remote AS. Then the router looks up the route to reach the EBGp next hop using the IBGP.
- B.** The router looks up the IBGP route and the IBGP next hop to reach a destination in the remote AS. Then the router looks up the route to reach the IBGP next hop using the EBGp.
- C.** The router looks up the BGP route and the BGP next hop to reach a destination in the remote AS. Then the router looks up the route to reach the BGP next hop using the IGP.
- D.** The router looks up the route and the next hop to reach a destination in the remote AS using the IGP. Then the router looks up the route to reach the next hop using BGP.
- E.** The router perform three routing lookups to determine the route to reach a destination in the remote AS. The first lookup is done using EBGp, the second lookup is done using IBGP, and the third lookup is done using the IGP.

Answer: C

Explanation:

QUESTION NO: 24

Which reserved AS number or range of numbers is used for backward compatibility between old BGP peers using 16-bit AS number and new BGP peers using 32-bit AS number?

- A.** AS 65001 to 65535
- B.** AS 65512 to 65535
- C.** AS 12345
- D.** AS 23456
- E.** AS 64001

Answer: D

Explanation:

QUESTION NO: 25

Which BGP attribute is a set of generic tags that can be used to signal various routing policies between BGP routers?

- A. AS path
- B. MED
- C. weight
- D. communities
- E. route tags

Answer: D

Explanation:

QUESTION NO: 26

Which of the following is a characteristic of dual-multihomed connectivity between an enterprise network and the service provider network or networks?

- A. An enterprise network that is connected to two or more different service providers with two or more links per service provider and using BGP to exchange routing updates with the service providers.
- B. Each service provider announces a default route on each of the links that connect to the customer with a different metric.
- C. An enterprise network announces a default route to each service provider.
- D. Load balancing can be achieved using the maximum-paths command.

Answer: A

Explanation:

QUESTION NO: 27

What are two ways to advertise networks into BGP? (Choose two.)


- A. using the neighbor router BGP command
- B. using a route policy in Cisco IOS XR Software or using a route map in Cisco IOS Software or Cisco IOS XE Software
- C. using route redistribution into BGP
- D. using the network router BGP command
- E. enabling an interface to run BGP using the interface router BGP command

Answer: C,D

Explanation:

QUESTION NO: 28

Refer to the network diagram in the exhibit.

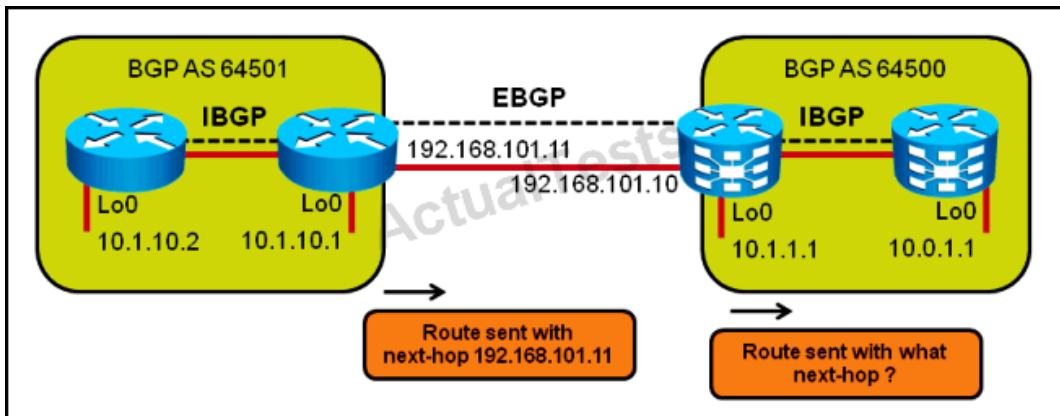

Assuming the IBGP session within AS 64500 was established using the loopback 0 interface between the two routers, by default, what will be the next hop of the routes from AS 64501 when the routes appear on the router running IBGP only in AS 64500?

- A. 192.168.101.11
- B. 192.168.101.10
- C. 10.1.1.1
- D. 10.0.1.1
- E. 10.1.10.1

Answer: A

Explanation:

QUESTION NO: 29

When configuring BGP on Cisco IOS XR Software, which address-family is enabled by default?

- A. IPv4 unicast
- B. IPv6 unicast
- C. VPNv4
- D. IPv4 unicast and IPv6 unicast

- E. IPv4 unicast and IPv6 unicast and VPNv4
- F. No address-family is enabled by default.

Answer: F

Explanation:

QUESTION NO: 30

What are two characteristics of the multihomed customers to service providers connection option? (Choose two.)

- A. Multihomed customers must use a private AS number.
- B. The traffic load can be shared for different destination networks between service providers.
- C. Multihomed customers must receive a full routing table from the service providers.
- D. The routing methodology must be capable of reacting to dynamic changes. BGP is used to achieve this flexibility.
- E. Multihomed customers must use a provider-assigned address space.

Answer: B,D

Explanation:

QUESTION NO: 31

Referring to the partial Cisco IOS-XR BGP configuration exhibit, when trying to commit this configuration, the following error is displayed:

% Failed to commit one or more configuration items during a pseudo-atomic operation. All changes made have been reverted. Please issue 'show configuration failed' from this session to view the errors.


```
router bgp 65111
!
neighbor 10.1.1.1
remote-as 65111
update-source Loopback0
address-family ipv4 unicast
!
neighbor 2001:db8:10:1:1::1
remote-as 65111
update-source Loopback0
address-family ipv6 unicast
!
```

What is wrong with the configuration?

- A. IPv6 unicast routing has not been enabled globally using the ipv6 unicast-routing command
- B. The configuration is missing the required network command
- C. The update-source loopback 0 commands must be configured under the respective neighbor address-family
- D. The configuration is missing the address-family ipv4 unicast and address-family ipv6 unicast commands under router bgp 65111

Answer: D

Explanation:

QUESTION NO: 32

When using the Cisco IOS-XR show bgp command to examine the BGP table, the Metric value being displayed is used to represent which BGP attribute?

- A. Weight
- B. Local Preference
- C. MED
- D. Cost Community

Answer: C

Explanation:

QUESTION NO: 33

Refer to the Cisco IOS-XR route policy exhibit.

```
route-policy setcomm  
if community matches-any (11:11, 44:44) then  
set community (55:55) additive  
elseif community matches-any (22:22) then  
set community (77:77) additive  
endif
```

Which statement correctly describes this route policy?

- A. The pass action is required after each of the set community statements to make this route policy functional.
- B. If a route has both the 11:11 and 22:22 communities (or 44:44 and 22:22), the router adds the 55:55 community only.
- C. If a route contains the 11:11 or 44:44 community, the router adds the 55:55 community and continues. Additionally, if the same route also contains the 22:22 community, the router also adds another 77:77 community to the same route.
- D. If a route only has the 22:22 community, then no community will be added by the router.
- E. If a route only has the 11:11 or 44:44 community, then no community will be added by the router.

Answer: B

Explanation:

QUESTION NO: 34

Refer to the BGP and route map configurations exhibit.

```
router bgp 65001
 neighbor 10.1.1.2 remote-as 65023
 neighbor 10.1.1.2 route-map setas out
 !
 route-map setas permit 10
  match ip address test1
  set as-path prepend 65111 65112
 !
 route-map setas permit 20
  match ip address test2
  set as-path prepend 65202 65203 65204
 !
!end of the route-map configuration
```

When the "setas" route map is applied to the 10.1.1.2 neighbor, the 10.1.1.2 neighbor is not able to receive all the required BGP routes from this router. What could be the problem?

- A. The BGP session was cleared using the clear ip bgp command after the route map was applied.
- B. The test1 or test2 prefix-list is misconfigured.
- C. There is no pass action configured within the route map.
- D. The route map is missing the route-map setas permit 30 statement.

Answer: D

Explanation:

QUESTION NO: 35

In Cisco IOS and Cisco IOS XE Software images, when redistributing routes from other routing protocols into OSPF, what is a common reason why some of the routes might not be redistributed into OSPF?

- A. The OSPF external metric type (E1 or E2) is not defined.
- B. The OSPF seed metric is not defined.
- C. The OSPF level (Level 1, Level 2, or Level-1-2) to which the routes will be redistributed into is not defined.
- D. The subnets option in the redistribute command is missing.

Answer: D

Explanation:

QUESTION NO: 36

Refer to the exhibit.

```
route-policy OSPFintoISIS
  if tag eq xxx then
    drop
  else
    set tag yyy
  endif
end-policy
```

Based on the Cisco IOS XR route policy configuration, when redistributing OSPF routes into IS-IS, to which of the following does the "tag" value correspond?

- A. The tag value represents the OSPF metric.
- B. The tag value represents the IS-IS metric.
- C. The tag value identifies a route or set of routes.
- D. The tag value is used to match whether the IS-IS route is an external or internal IS-IS route.
- E. The tag value represents the administrative distance.

Answer: C

Explanation:

QUESTION NO: 37

When configuring Cisco IOS route maps, which command allows the route map processing to jump to another statement instead of exiting?

- A. jump
- B. next
- C. set
- D. continue
- E. goto

Answer: D

Explanation:

QUESTION NO: 38

Refer to the Cisco IOS route map configuration exhibit.

```
route-map test permit 10
match ip address prefix-list PL1 PL2
match as-path APACL1
set local-preference 200
set metric 1000
!
route-map test permit 100
```

Which two statements are correct? (Choose two.)

- A.** The match prefix-list condition is a logical OR: match prefix list PL1 OR PL2.
- B.** All match conditions are logical OR: match prefix list PL1 OR PL2 OR match the APACL1 AS path access list.
- C.** The three match conditions are logical AND: match prefix list PL1 AND PL2 AND match the APACL1 AS path access list.
- D.** The local preference AND the metric will be set to 100 IF the route matches the PL1 OR PL2 prefix list AND the route must also match the APACL1 AS path access list.
- E.** All routes that are not matched by the sequence 10 route map statement will be dropped.

Answer: A,D

Explanation:

QUESTION NO: 39

Refer to the route policies exhibit.

```
route-policy one
end-policy
!
route-policy two
pass
end-policy
!
route-policy three
drop
end-policy
!
route-policy four
set weight 100
end-policy
!
route-policy five
pass
drop
pass
end-policy
!
```

Which five route policies will cause the routes to be dropped or passed? (Choose five)

- A. route-policy one will cause the routes to be dropped.
- B. route-policy two will cause the routes to be dropped.
- C. route-policy three will cause the routes to be dropped.
- D. route-policy four will cause the routes to be dropped.
- E. route-policy five will cause the routes to be dropped.
- F. route-policy one will cause the routes to be passed.
- G. route-policy two will cause the routes to be passed.
- H. route-policy three will cause the routes to be passed.
- I. route-policy four will cause the routes to be passed.
- J. route-policy five will cause the routes to be passed.

Answer: A,C,E,G,I

Explanation:

QUESTION NO: 40

When using the Cisco IOS XR route policy language to define a logical if-then-else condition, which logical operator has the highest precedence?

- A. AND
- B. OR
- C. NOT
- D. IS
- E. IN

Answer: C

Explanation:

QUESTION NO: 41

When configuring Cisco IOS XR route policy nesting, which command is used within a route policy to call another route policy?

- A. apply
- B. continue
- C. jump
- D. goto
- E. call

Answer: A

Explanation:

QUESTION NO: 42

Refer to the Cisco IOS XR route policy exhibit.

```
route-policy SetLP
if med eq 10 then
set local-preference 200
endif
if local-preference eq 100 then
set weight 100
endif
if local-preference eq 200 then
set weight 200
endif
end-policy
```

If the original incoming routing update has an MED of 10 and a local preference of 100, how will the routing update be modified?

- A. The local preference will be set to 100, the MED will be set to 10, and the weight will be set to 100.
- B. The local preference will be set to 100, the MED will be set to 10, and the weight will be set to 200.
- C. The local preference will be set to 200, the MED will be set to 10, and the weight will be set to 100.
- D. The local preference will be set to 200, the MED will be set to 10, and the weight will be set to 200.

Answer: C

Explanation:

QUESTION NO: 43

What is defined by using the Cisco IOS XR policy-global configuration command?

- A. the default BGP route policy
- B. global variables that can be referenced by any route policy
- C. the global default route policy
- D. hierarchical route policy
- E. nested route policy

Answer: B

Explanation:

QUESTION NO: 44

What is the default OSPF seed metric and type?

- A. 10 and E1
- B. 10 and E2
- C. 20 and E1
- D. 20 and E2
- E. 0 and E1
- F. 0 and E2

Answer: D

Explanation:**QUESTION NO: 45**

When redistributing routes into OSPF, which kind of routes will be redistributed by default on Cisco IOS XR Software but will not be automatically redistributed by default on Cisco IOS Software and Cisco IOS XE Software?

- A. Type 1 external routes
- B. Type 2 external routes
- C. subnetted routes
- D. /32 host routes
- E. tagged static routes

Answer: C

Explanation:**QUESTION NO: 46**

Refer to the Cisco IOS XR route policy exhibit.

```
route-policy new
  if community matches-any test then
    set local-preference 10
  elseif community matches-every foo then
    set local-preference 20
  else
    pass
  endif
end-policy
```

Which two statements are correct? (Choose two.)

- A. "test" and "foo" are references to the community sets.
- B. The "match-any" option indicates matching either the standard community or extended community.
- C. Routes that match both the "test" and "foo" conditions will have their local preference set to 20.
- D. All non-matching routes will be permitted.

Answer: A,D

Explanation:

QUESTION NO: 47

When redistributing EIGRP routes into OSPF as type E2 external OSPF routes, what is the default OSPF seed metric?


- A.** Infinite
- B.** 0
- C.** 1
- D.** 10
- E.** 20

Answer: E

Explanation:

QUESTION NO: 48

Refer to the exhibit.

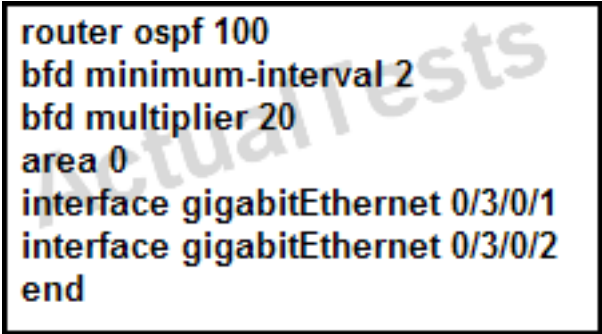

```
router ospf 100
bfd minimum-interval 2
bfd multiplier 20
area 0
interface gigabitEthernet 0/3/0/1
interface gigabitEthernet 0/3/0/2
end
```

Which Cisco IOS XR configuration is missing to complete the configuration task of enabling BFD with only the OSPF peer over the gi0/3/0/1 interface in area 0?

- A.** bfd fast-detect also needs to be enabled globally under router ospf 100.
RP/0/RSP0/CPU0:P1(config-ospf)#bfd fast-detect
- B.** bfd fast-detect also needs to be enabled for the OSPF area under area 0.
RP/0/RSP0/CPU0:P1(config-ospf-ar)#bfd fast-detect
- C.** bfd fast-detect also needs to be enabled for the OSPF interface under area 0 interface gi0/3/0/1.

RP/0/RSP0/CPU0:P1(config-ospf-ar-if)#bfd fast-detect

D. bfd fast-detect also needs to be enabled globally on the router.

RP/0/RSP0/CPU0:P1(config)#bfd fast-detect

E. bfd fast-detect also needs to be enabled on the gi0/3/0/1 interface under interface gi0/3/0/1.

RP/0/RSP0/CPU0:P1(config-if)#bfd fast-detect

Answer: C

Explanation:

QUESTION NO: 49

Which high-availability routing feature requires the neighbor router to support the graceful restart capability?

- A. BFD
- B. NSR
- C. NSF
- D. MTR

Answer: C

Explanation:

QUESTION NO: 50

Which high-availability mechanism is a detection protocol that is enabled at the interface and at the routing protocol levels?

- A. NSF
- B. SSO
- C. NSR
- D. BFD
- E. SDR

Answer: D

Explanation:

QUESTION NO: 51

Which OSPF feature allows a router with redundant route processors to maintain its OSPF state

and adjacencies across planned and unplanned RP switchovers and does this by checkpointing state information from OSPF on the active RP to the standby RP? This feature does not require the OSPF neighbor to support graceful restart.

- A. NSR
- B. NSF
- C. BFD
- D. MTR
- E. SDR

Answer: A

Explanation:

QUESTION NO: 52

Refer to the Cisco IOS show command output shown in the exhibit.

```
R1# show ip bgp 10.2.10.1
BGP routing table entry for 10.2.10.1/32, version 32
Paths: (2 available, best #2, table default)
  Advertised to update-groups:
    2
  64500 64500 64502
    192.168.103.30 from 192.168.103.30 (10.3.1.1)
      Origin IGP, localpref 100, weight 100, valid, external
  64500 64500 64502
    192.168.134.40 (metric 11) from 192.168.134.40 (10.4.1.1)
      Origin IGP, localpref 100, weight 200, valid, external, best

R1# show ip bgp
BGP table version is 89, local router ID is 11.0.0.1
Status codes: s suppressed, d damped, h history, * valid, > best, i - internal,
               r RIB-failure, S Stale
Origin codes: i - IGP, e - EGP, ? - incomplete
   Network        Next Hop        Metric LocPrf Weight Path
*> 10.2.10.1/32    192.168.201.20      200 64500 64500 64500 64500 64502 i
                   192.168.101.10      100 64500 64500 64502 i
```

Which of the following statements is correct?

- A. The best path to 10.2.10.1/32 was chosen because of the AS path.
- B. The best path to 10.2.10.1/32 was chosen because of the weight.
- C. The best path to 10.2.10.1/32 was chosen because of the local preference.
- D. The best path to 10.2.10.1/32 was chosen because of the MED.
- E. The best path to 10.2.10.1/32 was chosen because of the route origin.

Answer: B

Explanation:

QUESTION NO: 53

Which two statements regarding OSPFv2 or OSPFv3 authentication are correct? (Choose two.)

- A. OSPFv2 supports MD5 authentication.
- B. OSPFv2 supports MD5 or SHA authentication.
- C. OSPFv2 relies on the native security stack that uses IPsec.
- D. OSPFv3 supports MD5 authentication.
- E. OSPFv3 supports MD5 or SHA authentication.
- F. OSPFv3 relies on the native security stack that uses IPsec.

Answer: A,F

Explanation:

QUESTION NO: 54

What are three common problems that can cause a BGP neighbor state to toggle between the idle state and the active state? (Choose three.)

- A. BGP network command misconfiguration
- B. route policy misconfiguration
- C. AS number misconfiguration
- D. route map misconfiguration
- E. BGP neighbor peering to wrong IP address
- F. IGP routing problem: not able to reach the source IP address of the BGP open packet

Answer: C,E,F

Explanation:

QUESTION NO: 55

BGP peerings can be secured using which protection mechanism?

- A. SHA authentication
- B. MD5 authentication
- C. SSH
- D. SSL
- E. AAA

F. digital certificates

Answer: B

Explanation:

QUESTION NO: 56

In an AS with 10 routers running IBGP, how many IBGP sessions will be required to establish fully meshed IBGP peerings?

- A. 10
- B. 20
- C. 45
- D. 50
- E. 99
- F. 100

Answer: C

Explanation:

QUESTION NO: 57

You are implementing OSPF as the IGP using a single OSPF area design. The router memory usage for OSPF is too high. Which two methods can lower the OSPF memory usage? (Choose two.)

- A. enable OSPF synchronization
- B. implement multi-area OSPF
- C. enable OSPF sham links to reduce the number of LSAs
- D. implement route summarization on the ABRs
- E. enable route leaking between Level 1 and Level 2 areas

Answer: B,D

Explanation:

QUESTION NO: 58

Routes that are received from an IBGP peer will be propagated to which other routers by default?

- A. to the EBGp peers only
- B. to the IBGP peers only
- C. to both EBGp and IBGP peers
- D. to no other peers

Answer: A

Explanation:

QUESTION NO: 59

What are two consequences of having constant link flaps, resulting in the OSPF neighbor adjacencies going up and down repeatedly? (Choose two.)

- A. routes getting into the "Stuck In Active" state
- B. constant flooding of LSAs
- C. OSPF route dampening to occur
- D. many SPF recalculations
- E. routing loops may temporarily be introduced into the network

Answer: B,D

Explanation:

QUESTION NO: 60

When monitoring the OSPF operations in the network, you notice that the OSPF process is not load balancing traffic across multiple OSPF links. Which configuration adjustment could be made to enable the OSPF process to load balance traffic across multiple OSPF links?


- A. Enable BFD on the OSPF interfaces and on the OSPF routing process.
- B. Enable NSR on the OSPF routing process.
- C. Enable NSF on the OSPF routing process.
- D. Adjust the OSPF cost on the OSPF interfaces.
- E. Adjust the OSPF variance parameter.
- F. Use the wide-style OSPF metric instead of the narrow-style OSPF metric.

Answer: D

Explanation:

QUESTION NO: 61

Refer to the network diagram in the exhibit.

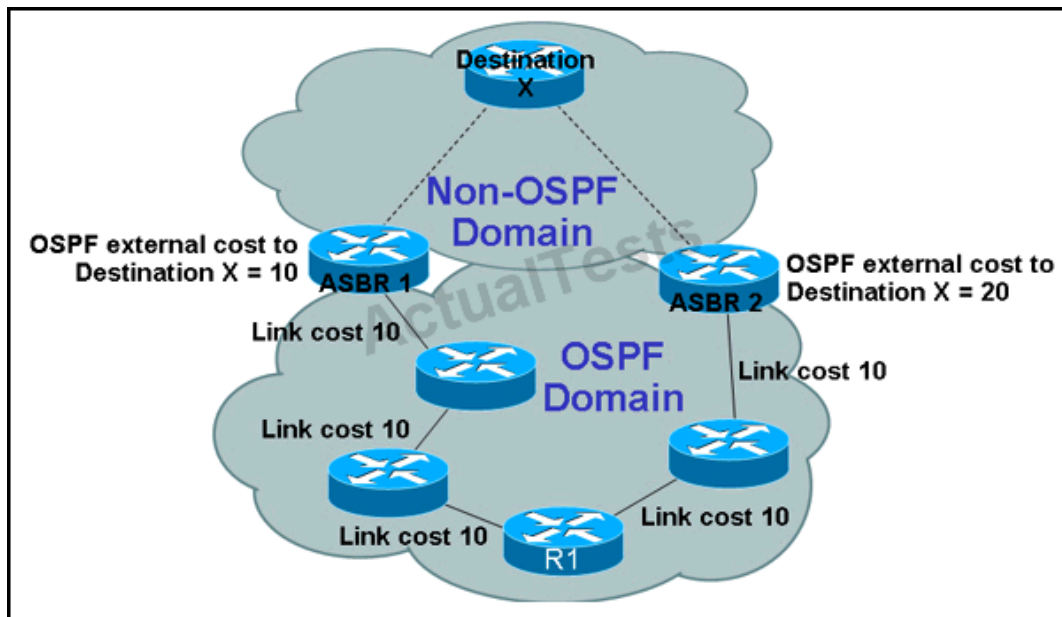

If both ASBRs are advertising the external Destination X network as OSPF E2 route, what is the best path for the R1 router to reach Network X?

- A. R1 will use the path via ASBR 2 as the best path.
- B. R1 will use the path via ASBR 1 as the best path.
- C. R1 will load balance between two equal cost paths via ASBR 1 and ASBR 2.
- D. R1 will see two equal costs and will choose the path through the ASBR with the lower OSPF router ID.

Answer: B

Explanation:

QUESTION NO: 62

Refer to the show command output in the exhibit.


```

Router#show ip route
Codes: C - connected, S - static, I - IGRP, R - RIP, M - mobile, B - BGP
       D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
       N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
       E1 - OSPF external type 1, E2 - OSPF external type 2, E - EGP
       i - IS-IS, L1 - IS-IS level-1, L2 - IS-IS level-2, ia - IS-IS inter area
       * - candidate default, U - per-user static route, o - ODR

Gateway of last resort is not set

  4.0.0.0/24 is subnetted, 1 subnets
D    4.4.4.0 [90/409600] via 161.108.0.4, 00:49:24, Ethernet0/0
  5.0.0.0/24 is subnetted, 1 subnets
C    5.5.5.0 is directly connected, Loopback0
 162.108.0.0/16 is variably subnetted, 2 subnets, 2 masks
C    162.108.10.0/24 is directly connected, Serial1/0
C    162.108.4.0/22 is directly connected, Serial2/0
C    161.108.0.0/16 is directly connected, Ethernet0/0
Router#
Router#show ip bgp
BGP table version is 6, local router ID is 5.5.5.5
Status codes: s suppressed, d damped, h history, * valid, > best, i - internal,
               S Stale
Origin codes: i - IGP, e - EGP, ? - incomplete

   Network        Next Hop           Metric LocPrf Weight Path
*  i1.1.1.0/24     132.108.10.1         0      100      0 1 i
*  i131.108.0.0    132.108.10.1         0      100      0 1 i
*>i161.108.0.0     4.4.4.4              0      100      0 i
Router#

```

For which reason will this router drop all traffic that is destined to the 1.1.1.0/24 network?

- A. The 1.1.1.0/24 route is not synchronized.
- B. The BGP next hop for reaching the 1.1.1.0/24 network is not reachable.
- C. The metric of the 1.1.1.0/24 route is set to 0.
- D. The weight of the 1.1.1.0/24 route is set to 0.
- E. The 1.1.1.0/24 route is an incomplete route.
- F. The IBGP split-horizon rule is preventing the router to use the IBGP route.

Answer: B

Explanation:

QUESTION NO: 63

Which of the following is used by an IS-IS router to detect other IS-IS neighbor routers and to form adjacencies?

- A. ESH
- B. ISH
- C. IIH
- D. PSNP
- E. CSNP

Answer: C

Explanation:**QUESTION NO: 64 DRAG DROP**

Drag the BGP attributes on the left to match the correct description on the right.

Weight	Only used within an AS and has a default value of 100.
MED	Can use the prepending feature to influence inbound traffic flow.
Local Preference	The lower of this value is the more desirable value. Used to influence the incoming traffic flow from the neighbor autonomous systems.
AS-Path	Proprietary to Cisco and not sent to any BGP peers. It is local to the router only.

Answer:

Drag the BGP attributes on the left to match the correct description on the right.

Weight	Local Preference
MED	AS-Path
Local Preference	MED
AS-Path	Weight

Explanation: Only used within an AS and has a default value of 100 – Local Preference

Can use the prepending feature to influence inbound traffic flow – AS_Path

The lower of this value is the more desirable value .Used to influence the incoming traffic flow from the neighbor autonomous systems. -- MED

Proprietary to cisco and no sent to any BGP peers. Its local to router only -Weight

QUESTION NO: 65 DRAG DROP

Drag the regular expression special character used in AS-Path access-list configuration on the left to match the correct description on the right.

^	Matches the end of the AS path string
\$	Matches the start of the AS path string
.	Matches any single character
	Matches any delimiter

Answer:

Drag the regular expression special character used in AS-Path access-list configuration on the left to match the correct description on the right.

^	\$
\$	^
_	.
.	-

Explanation: Matches the end of the AS Path String ---\$

Matches the Start of the AS Path String ----^

Matches any single character --- .

Matched any delimiter ---- -

QUESTION NO: 66 DRAG DROP

Drag the list of OSPF route type on the left to match the correct OSPF area type on the right. Not all options on the left are used.

Can contain the O, O IA and O*IA type of OSPF routes	NSSA Totally Stubby
Can contain the O, O IA, O N1 or O N2 type of OSPF routes	Stubby OSPF Area
Can contain the O and O*IA type of OSPF routes	Totally Stubby Area
Can contain the O, O N1 or O N2 type of OSPF routes	NSSA
Can contain the O, O IA, O E1 or O E2 type of OSPF routes	
Can contain the O, O E1 or O E2 type of OSPF routes	

Answer:

Drag the list of OSPF route type on the left to match the correct OSPF area type on the right. Not all options on the left are used.

Can contain the O, O IA and O*IA type of OSPF routes	Can contain the O and O*IA type of OSPF routes
Can contain the O, O IA, O N1 or O N2 type of OSPF routes	Can contain the O, O IA and O*IA type of OSPF routes
Can contain the O and O*IA type of OSPF routes	Can contain the O, O IA, O E1 or O E2 type of OSPF routes
Can contain the O, O N1 or O N2 type of OSPF routes	Can contain the O, O N1 or O N2 type of OSPF routes
Can contain the O, O IA, O E1 or O E2 type of OSPF routes	
Can contain the O, O E1 or O E2 type of OSPF routes	


Explanation: Totally Stubby Area – O,OIA , OE1 or OE2 types of OSPf routes

NSSA Totally Stubby – O, and O*IA types of OSPF routes

Stubby OSPF Area - O, OIA and O*IA types of OSPF routes

NSSA – O,OIA , ON1 or ON2 types of OSPF Routes


QUESTION NO: 67 DRAG DROP

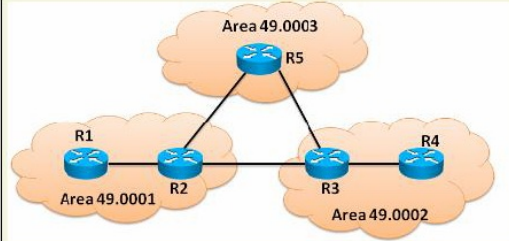

Refer to the IS-IS topology diagram. You are tasked with troubleshooting IS-IS configurations errors. Drag the router on the left to match the most optimal IS-IS router type it should use on the right.

R1
R2
R3
R4
R5

L1
Target
Target
L2
Target
L1/L2
Target
Target

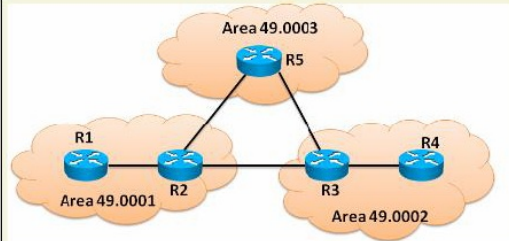Answer:


Refer to the IS-IS topology diagram. You are tasked with troubleshooting IS-IS configurations errors. Drag the router on the left to match the most optimal IS-IS router type it should use on the right.

R1
R2
R3
R4
R5

L1
R1
R4
L2
R5
L1/L2
R2
R3

Explanation:

L1 – R1 and R4

L1/L2 – R2 and R3

L2 – R5

QUESTION NO: 68 DRAG DROP

Drag the prefix list configuration on the left to match the correct description on the right. Not all options on the left are used.

ipv4 prefix-list one permit 255.255.255.255/32	Match the default route
ipv4 prefix-list one permit 0.0.0.0/0	Match any /25 to /32 prefixes
ipv4 prefix-list one permit 0.0.0.0/32	Match all routes
ipv4 prefix-list one permit 0.0.0.0/0 le 32	Match any host routes
ipv4 prefix-list one permit 0.0.0.0/0 ge 25	
ipv4 prefix-list one permit 0.0.0.255/24	
ipv4 prefix-list one permit 0.0.0.128/25 le 32	

Answer:

Drag the prefix list configuration on the left to match the correct description on the right. Not all options on the left are used.

ipv4 prefix-list one permit 255.255.255.255/32	ipv4 prefix-list one permit 0.0.0.0/0
ipv4 prefix-list one permit 0.0.0.0/0	ipv4 prefix-list one permit 0.0.0.0/0 ge 25
ipv4 prefix-list one permit 0.0.0.0/32	ipv4 prefix-list one permit 0.0.0.0/0 le 32
ipv4 prefix-list one permit 0.0.0.0/0 le 32	ipv4 prefix-list one permit 0.0.0.0/32
ipv4 prefix-list one permit 0.0.0.0/0 ge 25	
ipv4 prefix-list one permit 0.0.0.255/24	
ipv4 prefix-list one permit 0.0.0.128/25 le 32	

Explanation: Match the default Route – ipv4 prefix-list one permit 0.0.0.0/0

Match all routes – ipv4 prefix-list permit 0.0.0.0/0 le 32

Match any host routes - ipv4 prefix-list permit 0.0.0.0/32

Match any /25 to /32 prefixes - ipv4 prefix-list permit 0.0.0.0/0 ge 25

QUESTION NO: 69 DRAG DROP

Drag the BGP attributes on the left to the boxes on the right in the correct order. The attribute that is used first during the BGP route selection process should be the top box on the right, and the attribute that is used last should be the bottom box on the right.

MED	Target
Weight	Target
AS-Path Length	Target
Local Preference	Target

Answer:

Drag the BGP attributes on the left to the boxes on the right in the correct order. The attribute that is used first during the BGP route selection process should be the top box on the right, and the attribute that is used last should be the bottom box on the right.

MED	Weight
Weight	Local Preference
AS-Path Length	AS-Path Length
Local Preference	MED

Explanation: Weight

Local-Preference

As-Path

MED

QUESTION NO: 70

Instructions

Enter the proper CLI commands and analysis the outputs on the Cisco routers to answer the multiple-choice questions.

From the network topology diagram, click on each of the router icon to gain access to the console of each router.

No console or enable passwords are required.

There are four multiple-choice questions with this task. Be sure to answer all four questions before selecting the Next button.

Not all the CLI commands or commands options are supported or required for this simulation.


For example, the show running-config and the ping commands are **NOT** supported in this simulation.


All the devices in this simulation have been pre-configured and you are not required to enter in any configurations.

Scenario

Referring to the multiarea IPv4 and IPv6 OSPF network topology diagram shown in the exhibit, use the proper CLI commands on the CE5, PE5 and PE6 routers and interpret the supported CLI commands outputs to answer the four multiple choice questions.

Note: The CE5 router is an IOS router, the PE5 router is an IOS-XR router, and the PE6 router is an IOS-XE router.

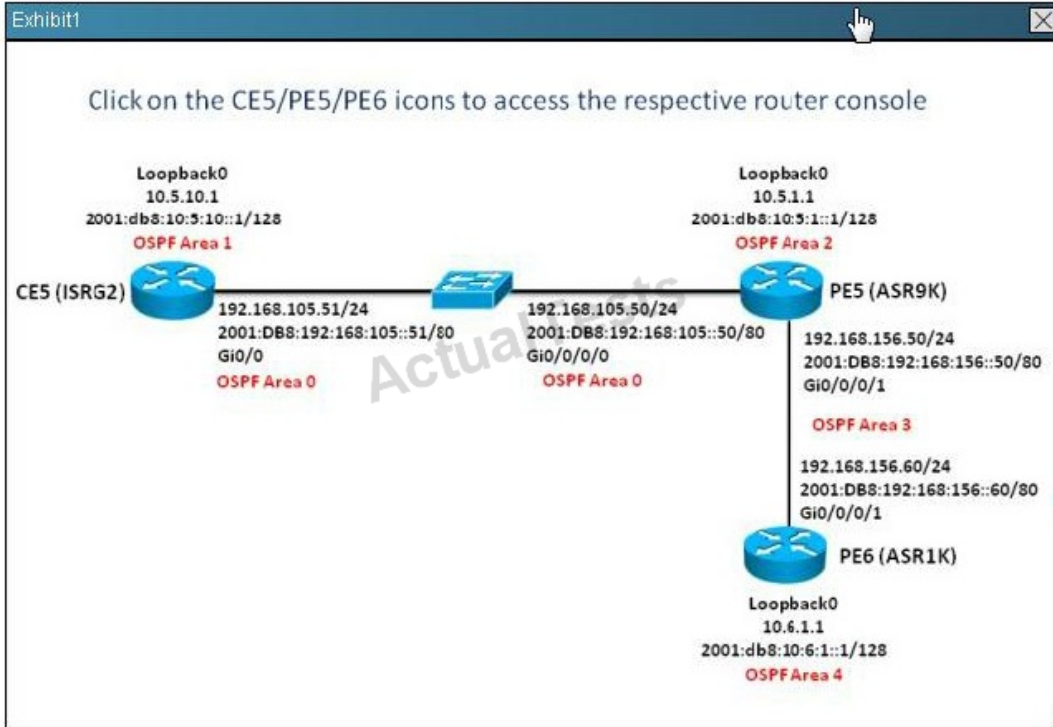

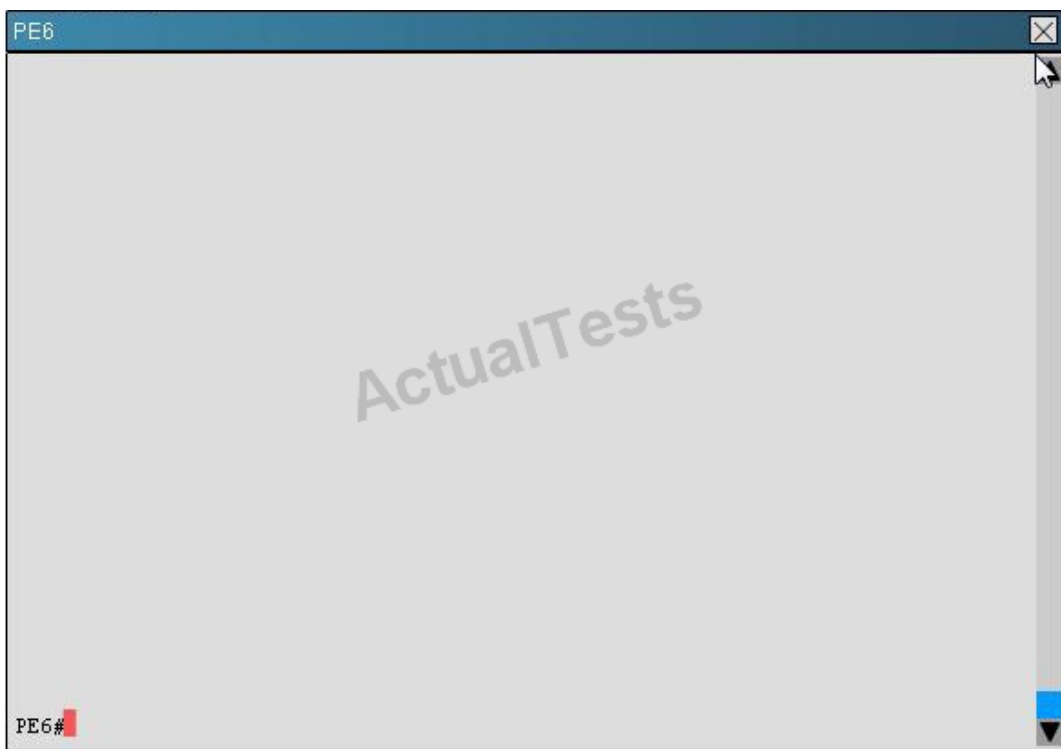

How many total OSPF virtual links are configured in this multiarea OSPF network which supports both OSPFv2 and OSPFv3 for IPv4 and IPv6 routing?

- A. 1
- B. 2
- C. 3
- D. 4

Answer: B**Explanation:**

#Show running-config | include virtual – check how many router having “virtual “ entry

QUESTION NO: 71

Instructions

Enter the proper CLI commands and analysis the outputs on the Cisco routers to answer the multiple-choice questions.

From the network topology diagram, click on each of the router icon to gain access to the console of each router.

No console or enable passwords are required.

There are four multiple-choice questions with this task. Be sure to answer all four questions before selecting the Next button.

Not all the CLI commands or commands options are supported or required for this simulation.


For example, the show running-config and the ping commands are **NOT** supported in this simulation.

All the devices in this simulation have been pre-configured and you are not required to enter in any configurations.


Scenario

Referring to the multiarea IPv4 and IPv6 OSPF network topology diagram shown in the exhibit, use the proper CLI commands on the CE5, PE5 and PE6 routers and interpret the supported CLI commands outputs to answer the four multiple choice questions.

Note: The CE5 router is an IOS router, the PE5 router is an IOS-XR router, and the PE6 router is an IOS-XE router.

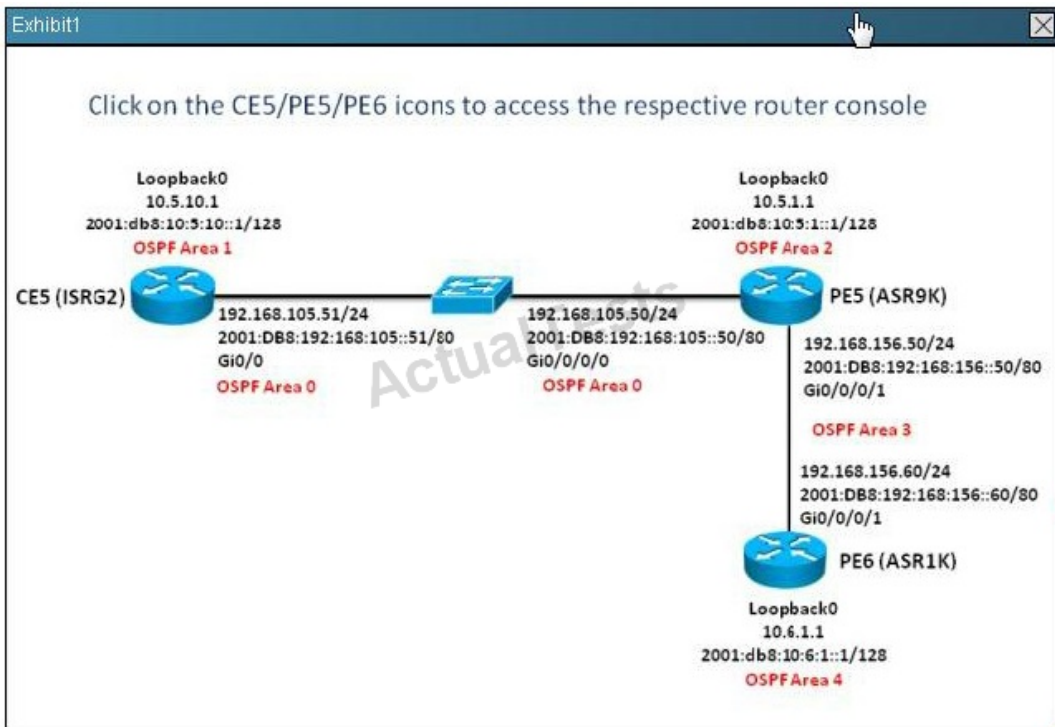



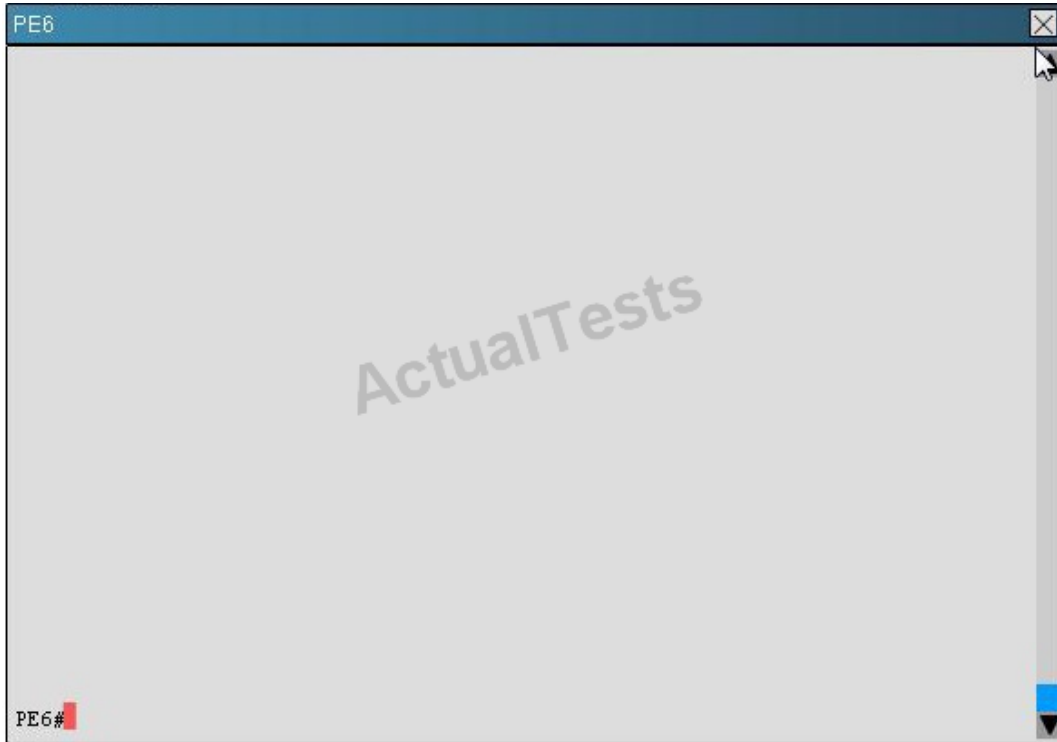

Which statement is correct regarding the DR election process in this OSPF implementation?

- A. Both the CE5 and PE6 routers are DROTHERs
- B. PE5 is the OSPFv2 DR for the GigabitEthernet link between PE5 and PE6
- C. PE6 is the OSPFv2 and OSPFv3 DR for the GigabitEthernet link between PE5 and PE6
- D. PE6 is the DR for the GigabitEthernet link between PE5 and PE6 because it has a higher OSPF priority

Answer: A

Explanation: # show ip ospf neighbor

show ipv6 ospf neighbor

QUESTION NO: 72

Instructions

Enter the proper CLI commands and analysis the outputs on the Cisco routers to answer the multiple-choice questions.

From the network topology diagram, click on each of the router icon to gain access to the console of each router.

No console or enable passwords are required.

There are four multiple-choice questions with this task. Be sure to answer all four questions before selecting the Next button.

Not all the CLI commands or commands options are supported or required for this simulation.

For example, the show running-config and the ping commands are **NOT** supported in this simulation.

All the devices in this simulation have been pre-configured and you are not required to enter in any configurations.


Scenario

Referring to the multiarea IPv4 and IPv6 OSPF network topology diagram shown in the exhibit, use the proper CLI commands on the CE5, PE5 and PE6 routers and interpret the supported CLI commands outputs to answer the four multiple choice questions.


Note: The CE5 router is an IOS router, the PE5 router is an IOS-XR router, and the PE6 router is an IOS-XE router.

Exhibit1

Click on the CE5/PE5/PE6 icons to access the respective router console

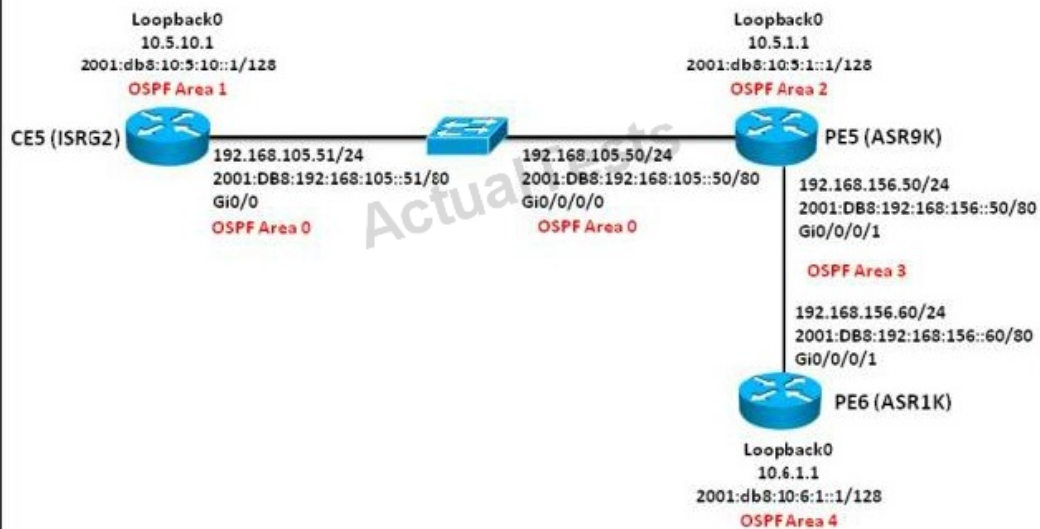



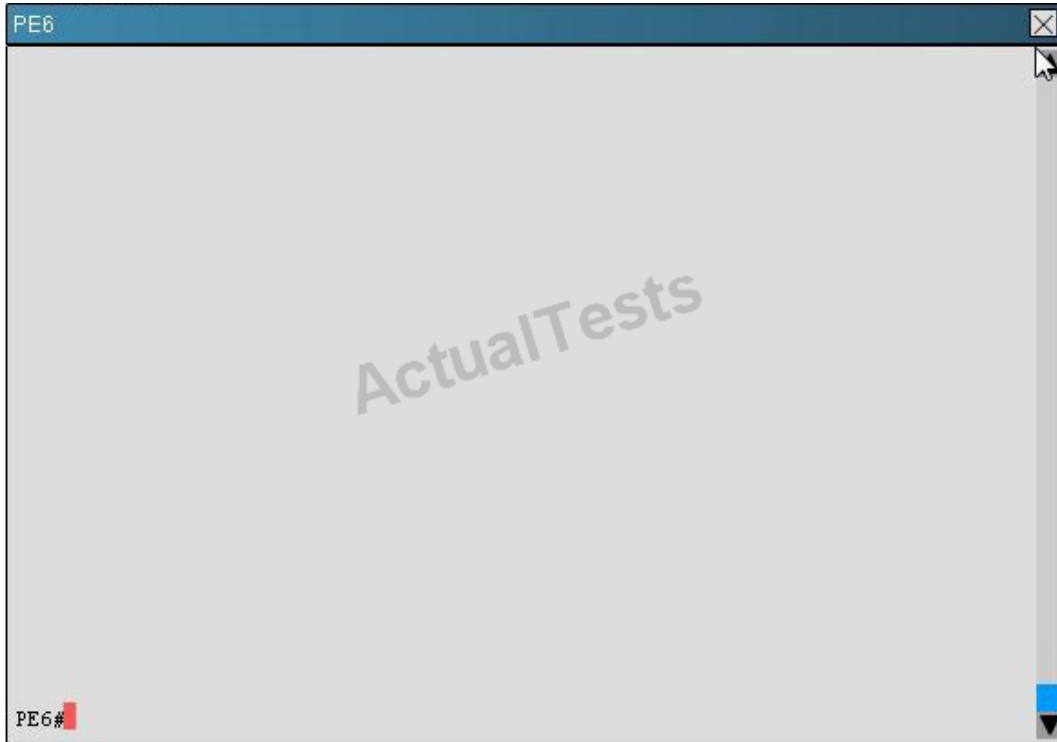

On the PE5 router, there are how many IPv4 and IPv6 OSPF neighbors and how many IPv4 OSPF interfaces? (Choose three)

- A. two ipv4 ospf neighbors
- B. three ipv4 ospf neighbors
- C. two ipv6 ospf neighbors
- D. three ipv6 ospf neighbors
- E. three ipv4 ospf interfaces
- F. four ipv4 ospf interfaces

Answer: A,E,F

Explanation:

show ip ospf neighbor

show ipv6 ospf neighbor

QUESTION NO: 73

Instructions

Enter the proper CLI commands and analysis the outputs on the Cisco routers to answer the multiple-choice questions.

From the network topology diagram, click on each of the router icon to gain access to the console of each router.

No console or enable passwords are required.

There are four multiple-choice questions with this task. Be sure to answer all four questions before selecting the Next button.

Not all the CLI commands or commands options are supported or required for this simulation.

For example, the show running-config and the ping commands are **NOT** supported in this simulation.

All the devices in this simulation have been pre-configured and you are not required to enter in any configurations.


Scenario

Referring to the multiarea IPv4 and IPv6 OSPF network topology diagram shown in the exhibit, use the proper CLI commands on the CE5, PE5 and PE6 routers and interpret the supported CLI commands outputs to answer the four multiple choice questions.


Note: The CE5 router is an IOS router, the PE5 router is an IOS-XR router, and the PE6 router is an IOS-XE router.

Exhibit1

Click on the CE5/PE5/PE6 icons to access the respective router console

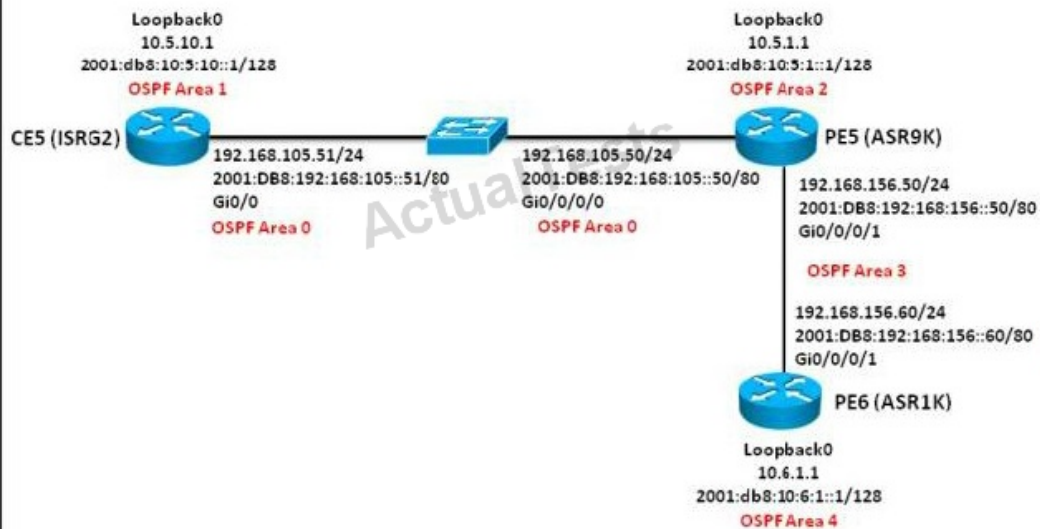



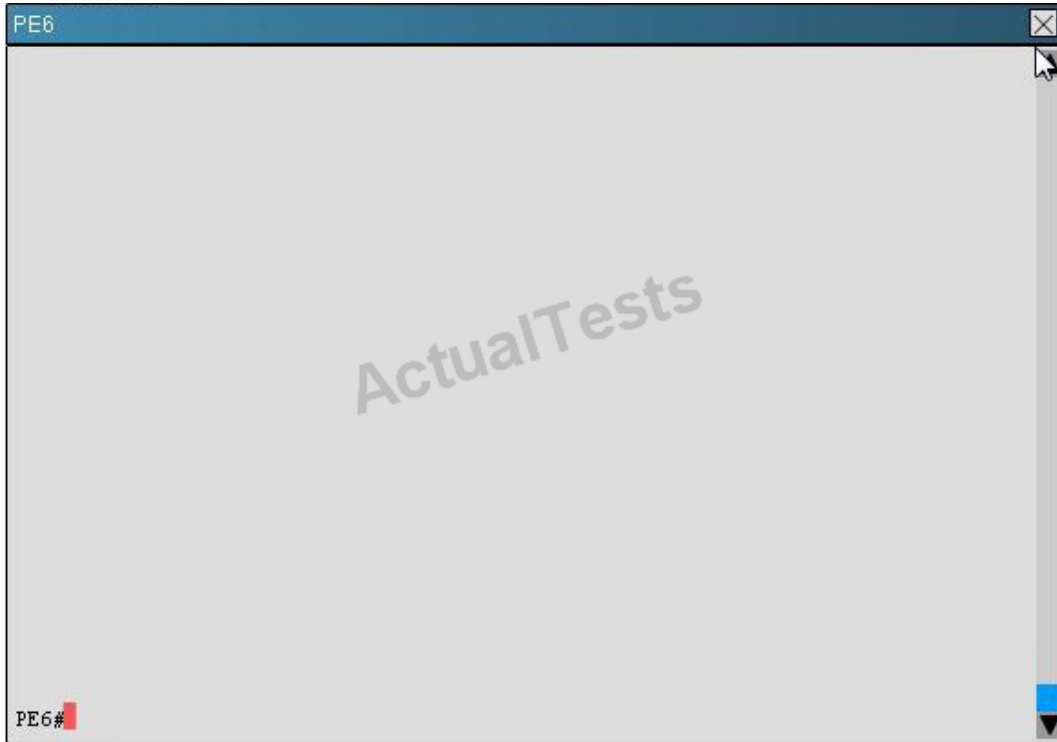

Which three statements are correct regarding the OSPF operations? line (Choose three.)

- A. PE5 OSPFv2 and OSPFv3 router id is 10.5.1.1
- B. The OSPF virtual-link cost is 1
- C. Area 3 is a transit area
- D. Area 4 is using MD5 authentication
- E. Area 1 IPv4 and IPv6 networks are not reachable from PE6

Answer: C,D,E

Explanation: #show ip protocols

#show ip route ospf

#show ip ospf interfaces

#show ip ospf neighbors

#show ip ospf database

#show ip ospf border-routers

#show ip ospf

#show ip route

#show ip protocols

QUESTION NO: 74

Instructions

- Enter the proper CLI commands and analysis the outputs on the Cisco routers to answer the multiple-choice questions.
- From the network topology diagram, click on each of the router icon to gain access to the console of each router.
- No console or enable passwords are required.
- There are four multiple-choice questions with this task. Be sure to answer all four questions before selecting the Next button.
- Not all the CLI commands or commands options are supported or required for this simulation.
- For example, the show running-config and the ping commands are **NOT** supported in this simulation.
- All the devices in this simulation have been pre-configured and you are not required to enter in any configurations.


Scenario



Referring to the network topology diagram shown in the exhibit, use the proper CLI commands on the CE5, PE5 and PE6 routers and interpret the supported CLI commands outputs to answer the four multiple choice questions.

Note: The CE5 router is an IOS router, the PE5 router is an IOS-XR router, and the PE6 router is an IOS-XE router.

Topology

Click on the CE5/PE5/PE6 icons to access the respective router console

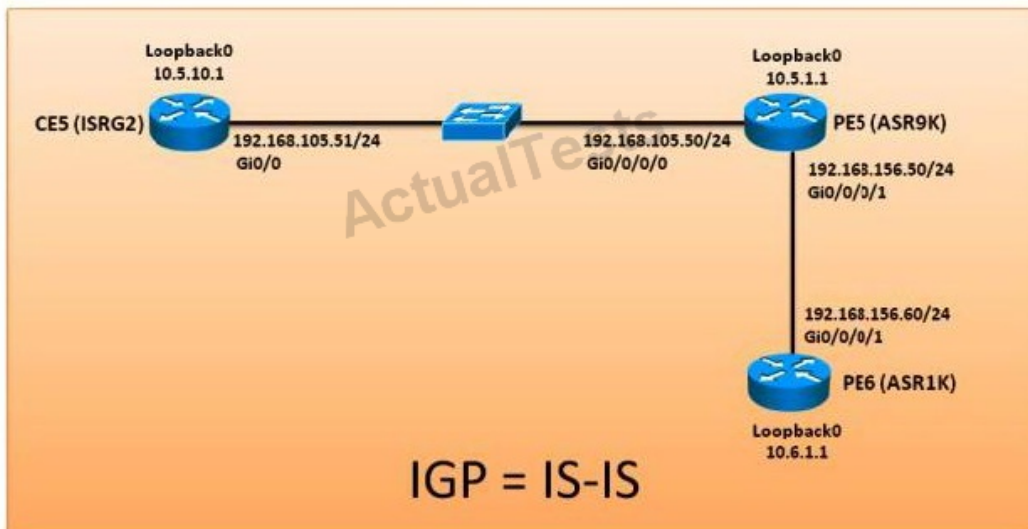

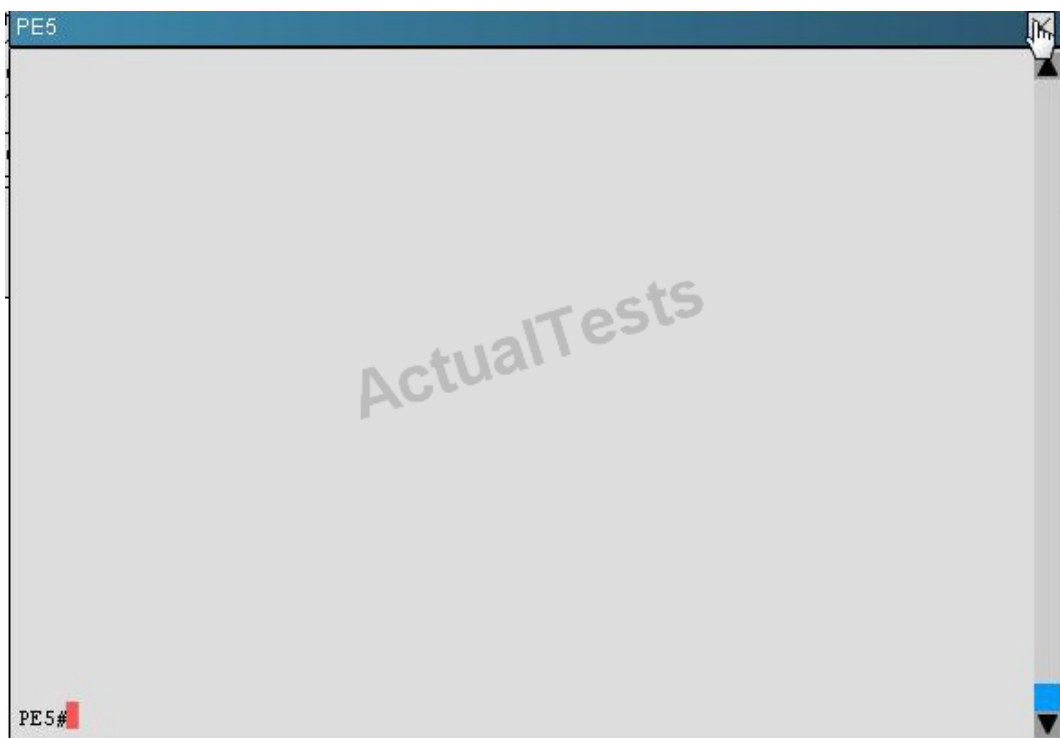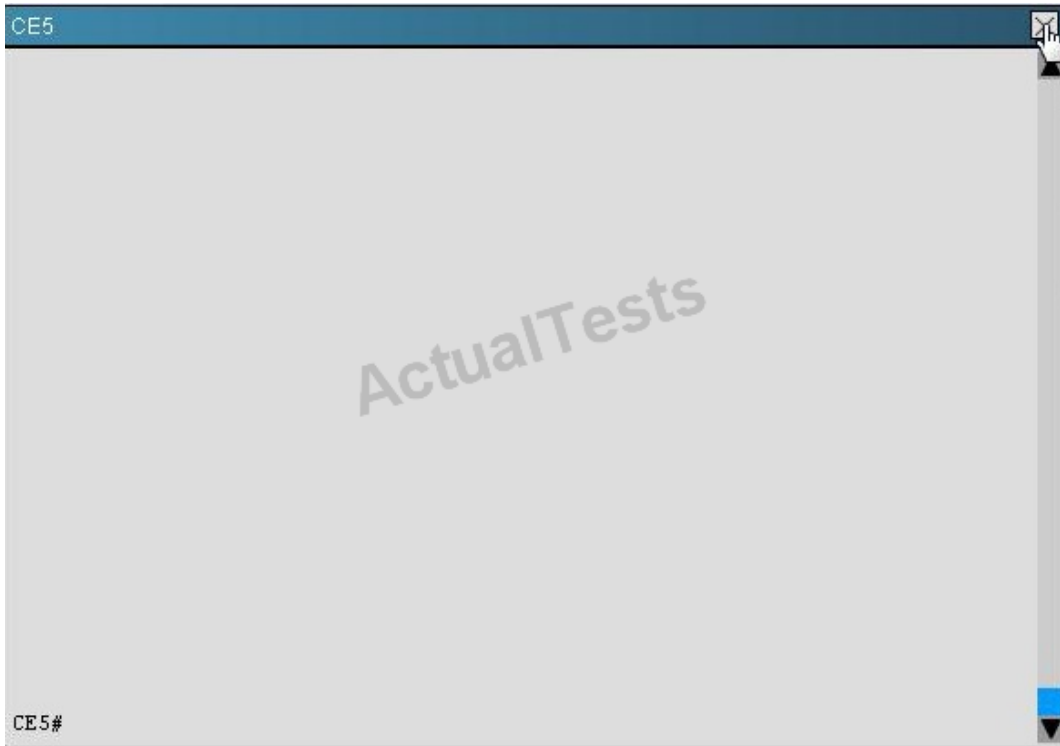



What is the configured IS-IS circuit-type between the CE5 and PE5 routers and between the PE5 and PE6 routers? (Choose two.)

- A. Circuittype L1 between CE5 and PE5
- B. Circuittype L1/L2 between CE5 and PE5
- C. Circuittype L2 between CE5 and PE5
- D. Circuittype L1 between PE5 and PE6
- E. Circuittype L1/L2 between PE5 and PE6
- F. Circuittype L2 between PE5 and PE6

Answer: A,F

Explanation:

#show clns neighbor

QUESTION NO: 75

Instructions

- Enter the proper CLI commands and analysis the outputs on the Cisco routers to answer the multiple-choice questions.
- From the network topology diagram, click on each of the router icon to gain access to the console of each router.
- No console or enable passwords are required.
- There are four multiple-choice questions with this task. Be sure to answer all four questions before selecting the Next button.
- Not all the CLI commands or commands options are supported or required for this simulation.
- For example, the show running-config and the ping commands are **NOT** supported in this simulation.
- All the devices in this simulation have been pre-configured and you are not required to enter in any configurations.


Scenario



Referring to the network topology diagram shown in the exhibit, use the proper CLI commands on the CE5, PE5 and PE6 routers and interpret the supported CLI commands outputs to answer the four multiple choice questions.

Note: The CE5 router is an IOS router, the PE5 router is an IOS-XR router, and the PE6 router is an IOS-XE router.

Topology

Click on the CE5/PE5/PE6 icons to access the respective router console

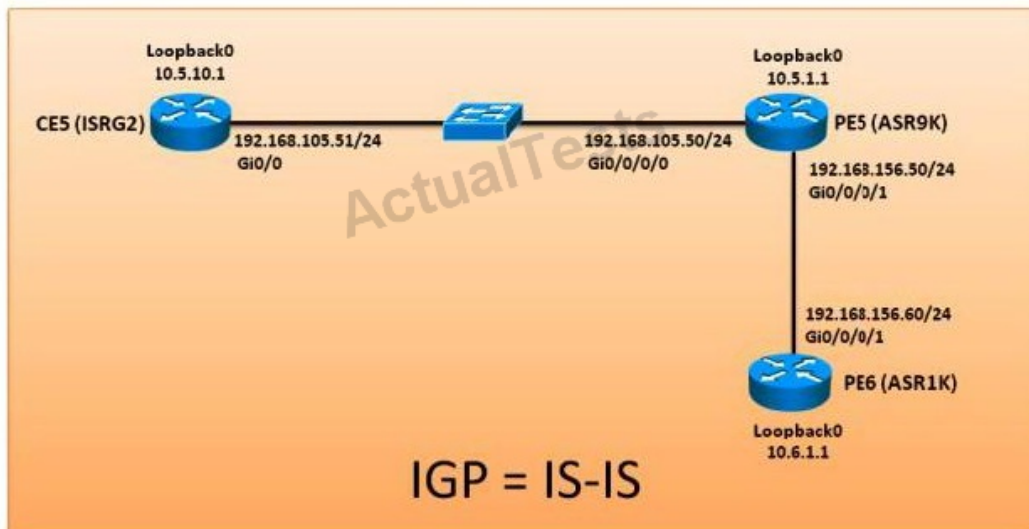

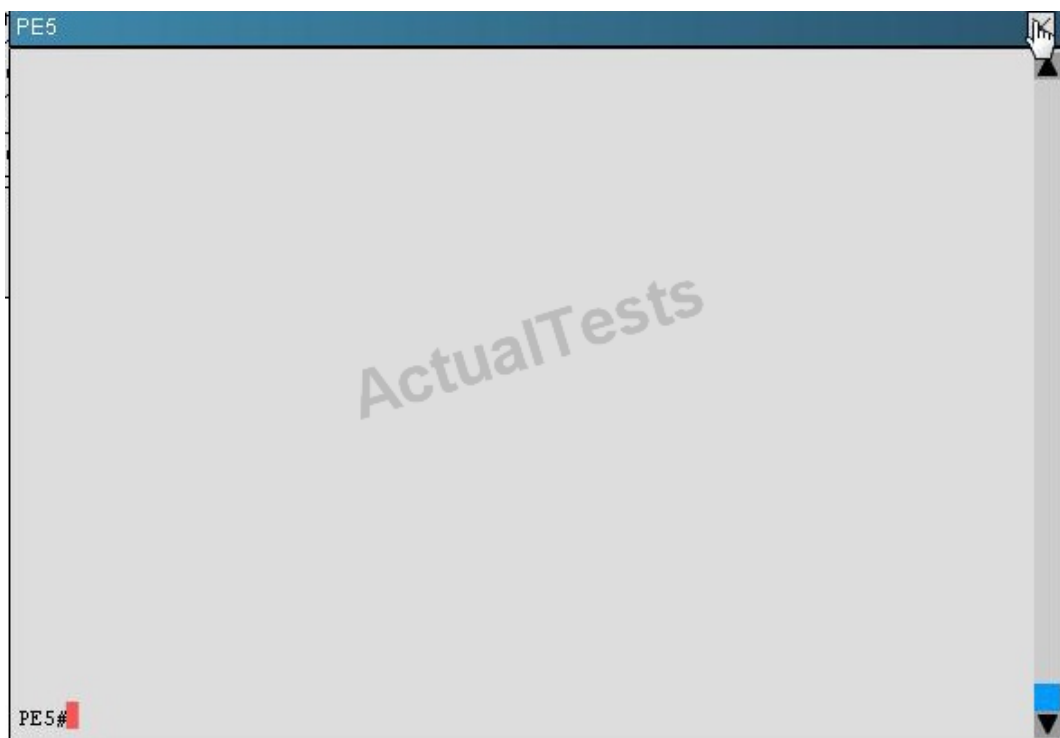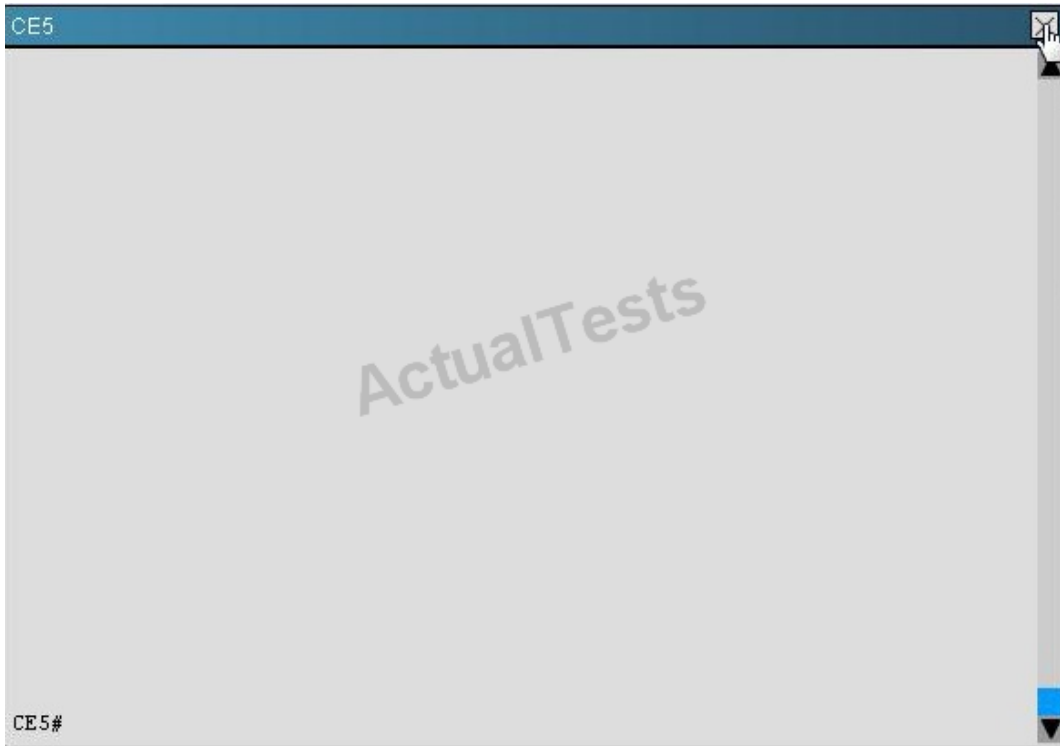



Which router(s) is/are IS-Type L1/L2 IS-IS router?

- A. CE5 only
- B. PE6 only
- C. CE5 and PE6 only
- D. PE5 and PE6 only
- E. CE5, PE5 and PE6

Answer: D

Explanation:

#show clns neighbor

QUESTION NO: 76

Instructions

- Enter the proper CLI commands and analysis the outputs on the Cisco routers to answer the multiple-choice questions.
- From the network topology diagram, click on each of the router icon to gain access to the console of each router.
- No console or enable passwords are required.
- There are four multiple-choice questions with this task. Be sure to answer all four questions before selecting the Next button.
- Not all the CLI commands or commands options are supported or required for this simulation.
- For example, the show running-config and the ping commands are **NOT** supported in this simulation.
- All the devices in this simulation have been pre-configured and you are not required to enter in any configurations.


Scenario



Referring to the network topology diagram shown in the exhibit, use the proper CLI commands on the CE5, PE5 and PE6 routers and interpret the supported CLI commands outputs to answer the four multiple choice questions.

Note: The CE5 router is an IOS router, the PE5 router is an IOS-XR router, and the PE6 router is an IOS-XE router.

Topology

Click on the CE5/PE5/PE6 icons to access the respective router console

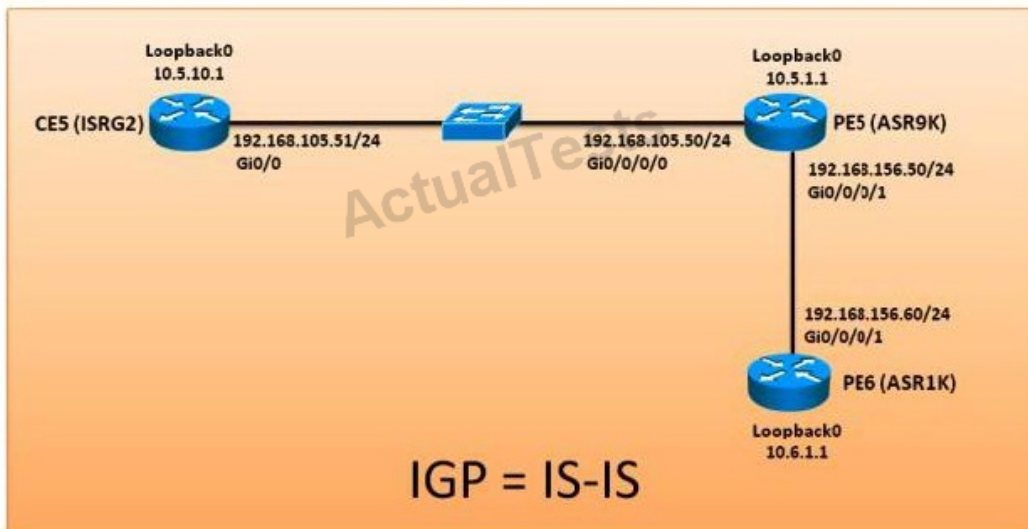

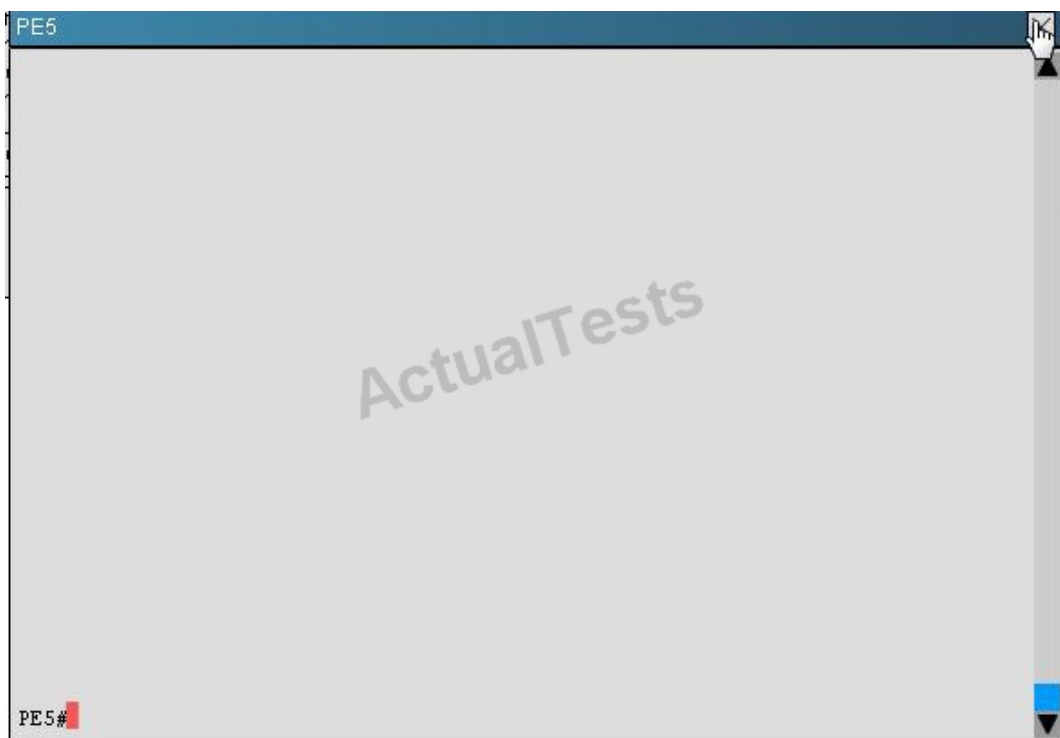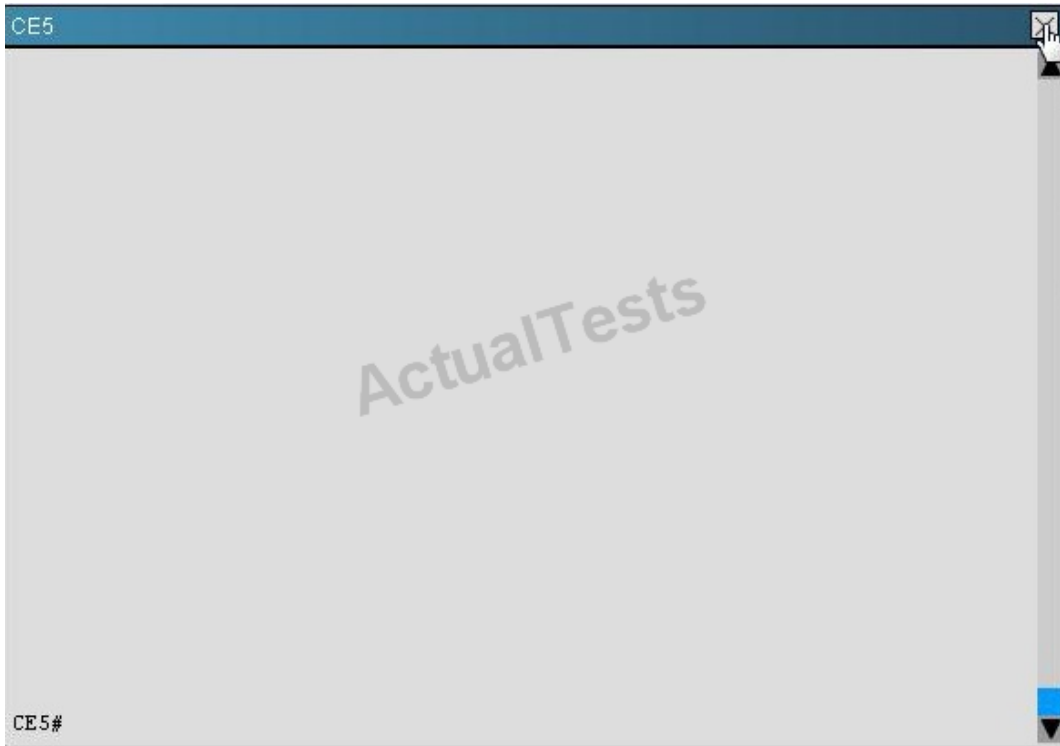



There are how many IS-IS area(s) defined in this network Scenario?

- A. 1
- B. 2
- C. 3
- D. 4

Answer: C

Explanation: #show clns

QUESTION NO: 77

Instructions

- Enter the proper CLI commands and analysis the outputs on the Cisco routers to answer the multiple-choice questions.
- From the network topology diagram, click on each of the router icon to gain access to the console of each router.
- No console or enable passwords are required.
- There are four multiple-choice questions with this task. Be sure to answer all four questions before selecting the Next button.
- Not all the CLI commands or commands options are supported or required for this simulation.
- For example, the show running-config and the ping commands are **NOT** supported in this simulation.
- All the devices in this simulation have been pre-configured and you are not required to enter in any configurations.


Scenario

Referring to the network topology diagram shown in the exhibit, use the proper CLI commands on the CE5, PE5 and PE6 routers and interpret the supported CLI commands outputs to answer the four multiple choice questions.

Note: The CE5 router is an IOS router, the PE5 router is an IOS-XR router, and the PE6 router is an IOS-XE router.

Topology



Click on the CE5/PE5/PE6 icons to access the respective router console

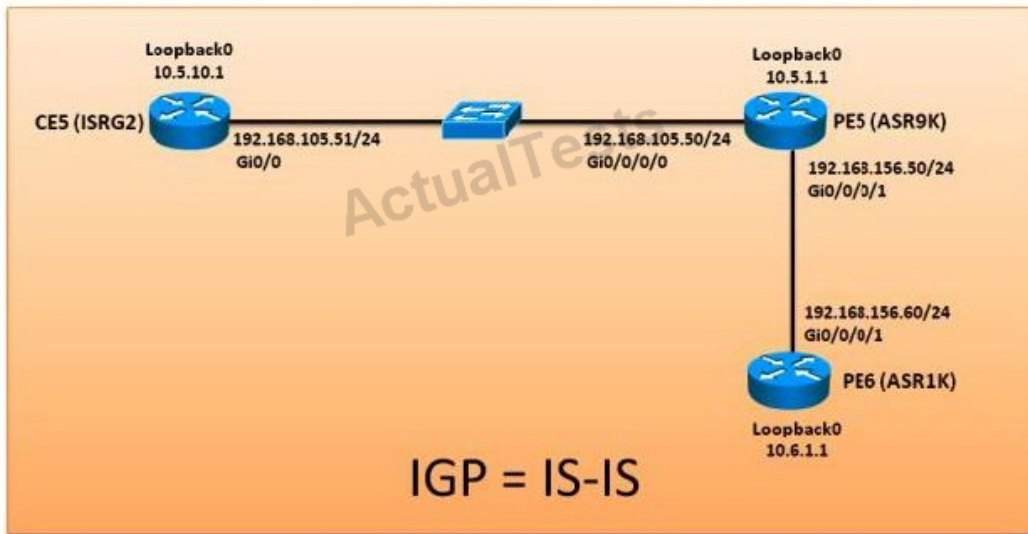

CE5

ActualTests

CE5#

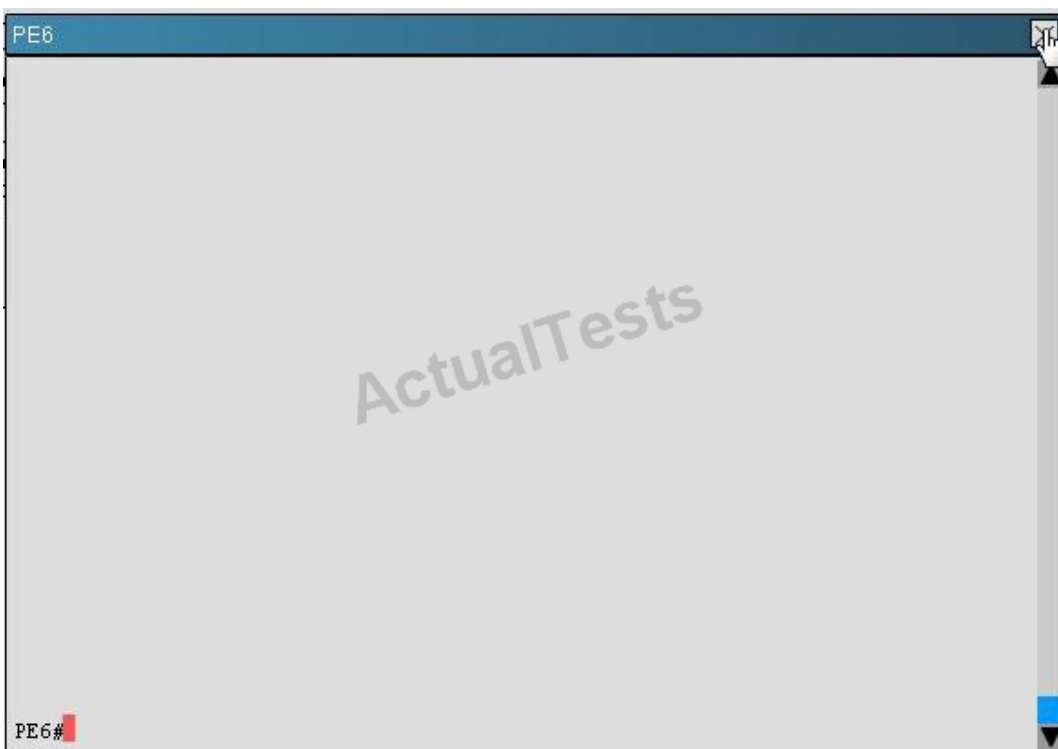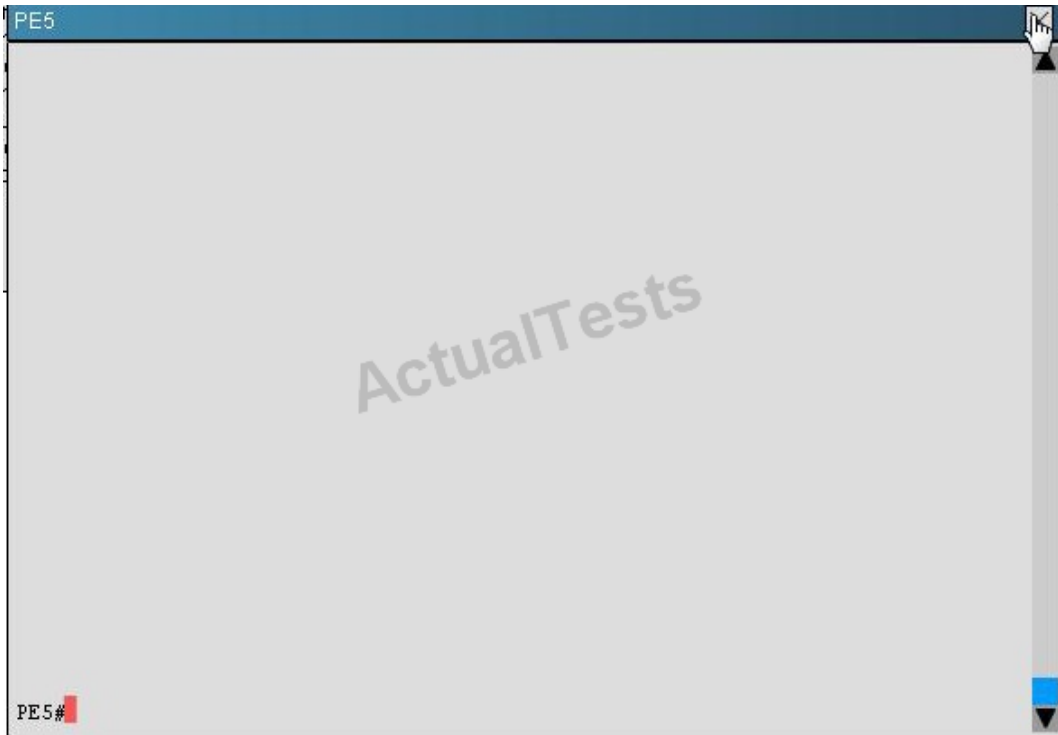

Which router has the su 10.5.10.0/24 [20/115] entry pointing to Null0 in its routing table and why? (Choose two.)

- A. CE5
- B. PE5
- C. PE6
- D. The router is summarizing 10.5.10.1/32 into 10.5.10.0/24

- E. The router is suppressing the 10.5.10.0/24 route
- F. The L2/L1 IS-IS router is blocking the 10.5.10.0/24 interarea route to the L1-only router

Answer: D,F

Explanation:

show clns route