


Cisco 642-770

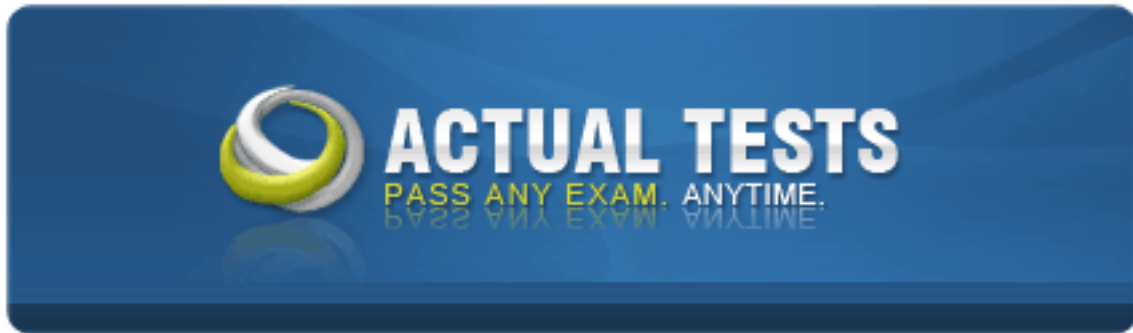

**Operational Foundations for Cisco Service Provider
Core Networks (OFCN)
Version: 5.0**

QUESTION NO: 1

Which two-stage configuration process is correct in Cisco IOS XR Software?

- A. Enter configuration mode, then make configuration changes.
- B. Make configuration changes, then enter "commit" to make configuration changes persist.
- C. Make configuration changes, then enter "copy run start" to make configuration changes persist.
- D. Enter admin mode, then make configuration changes.

Answer: B

Explanation:

QUESTION NO: 2

Which command displays the target configuration in Cisco IOS XR Software?

- A. show config
- B. show running-config
- C. show config running
- D. show config merge

Answer: A

Explanation:

QUESTION NO: 3

What will happen if a new version of Cisco IOS XR Software is installed and activated, and then the router reloads?

- A. When the router comes back, the new version is loaded and the old and new versions are on disk0.
- B. When the router comes back, the new version is loaded and only the new version is on disk0.
- C. When the router comes back, the old version is loaded and the old and new versions are on disk0.
- D. When the router comes back, the old version is loaded and only the old version is on disk0.

Answer: C

Explanation:

QUESTION NO: 4

When is it appropriate to use the commit replace command?

- A. When you want to replace the existing configuration for an ipv4 address on an interface.
- B. When you want to replace all configurations under router ospf.
- C. When you want to replace the entire running configuration with the target configuration.
- D. The commit replace command does the same as the commit command.

Answer: C

Explanation:

QUESTION NO: 5

Refer to the exhibit.

```
control-plane
management-plane
inband
interface GigabitEthernet0/2/0/0
  allow Telnet
  allow SNMP peer
  address ipv4 192.168.0.0/16
interface GigabitEthernet0/2/0/1
  allow SSH peer
  address ipv4 192.168.0.0/16
  allow Telnet
```

If all else are good, where could the problem be if a user in the 192.168.0.0/16 subnet reports that they are not able to connect to the router using Telnet?

- A. MPP should be configured as out-of-band.
- B. Interface GigabitEthernet0/2/0/1 should allow 192.168.0.0/16 address space when using Telnet.
- C. Telnet traffic is going through other interfaces that are not configured in MPP.
- D. Interface GigabitEthernet0/2/0/0 should allow 192.168.0.0/16 address space.

E. SNMP peer is not configured to "allow" on interface GigabitEthernet0/2/0/1 which prohibits Telnet

Answer: C

Explanation:

QUESTION NO: 6

At which SONET layer would you expect to see B3 errors?

- A. physical
- B. segment
- C. line
- D. path

Answer: D

Explanation:

QUESTION NO: 7

What is a common cause of increasing NEWPTR errors on a POS interface?

- A. dirty fiber
- B. incorrect timing
- C. Tx and Rx swapped
- D. wrong fiber type

Answer: B

Explanation:

QUESTION NO: 8

What is the range of DLCIs that are available for subscribers to configure on a Cisco IOS Frame Relay subinterface?

- A. 0-1024
- B. 1-2048
- C. 0-991

D. 16-1007

Answer: D

Explanation:

QUESTION NO: 9

What is the acronym commonly used to identify a prearranged agreement between a service team and an external service provider?

- A. SLA**
- B. OLA**
- C. UC**
- D. SLM**
- E. CICS**

Answer: C

Explanation:

QUESTION NO: 10

According to the ITIL® v3 framework, a change that has an "approved" status has met which criteria?

- A. The lab testing and operational assessments have been completed, and the change has been approved and committed to the change scheduler.**
- B. The operational testing and technical assessments have been completed, and the change has been approved and committed to the change scheduler.**
- C. The business and technical assessments have been completed, and the change has been approved and committed to the change scheduler.**
- D. The lab testing and technical assessments have been completed, and the change has been approved but is not yet committed to the change scheduler.**

Answer: C

Explanation:

QUESTION NO: 11

What is the primary purpose of the change approval process?

- A. provide a common forum for users and the technical community
- B. achieve continuous improvement in the change control process
- C. assess and mitigate risk
- D. knowledge capture and documentation accuracy

Answer: C

Explanation:

QUESTION NO: 12

What do you call a process that collects and compiles a series of measurements, taken at regular intervals that are representative of a current status and health of the network?

- A. trend analysis
- B. baselining
- C. exception reporting
- D. SNMP monitoring

Answer: B

Explanation:

QUESTION NO: 13

According to the ITIL® v3 framework, what is the primary purpose of knowledge management?

- A. to gather, analyze, store, and share knowledge and information within an organization
- B. to maintain information about the configuration items needed to deliver a service
- C. to improve efficiency by reducing the need to rediscover knowledge
- D. to track problems

Answer: C

Explanation:

QUESTION NO: 14

According to the ITIL® v3 framework, which service transition process is responsible for planning and coordinating the resources to deploy a major release within predicted cost, time, and quality estimates?

- A. change management
- B. transition planning and support
- C. release and deployment management
- D. service validation and testing
- E. knowledge management
- F. transition architecture and engineering

Answer: B

Explanation:

QUESTION NO: 15

You have just solved a troublesome network event. From a troubleshooting perspective, what is your next step?

- A. Secure the device you performed the change on.
- B. Document the problem and what you did to correct it.
- C. Close the ticket.
- D. Notify the service desk.

Answer: B

Explanation:

QUESTION NO: 16

What is the best way to mitigate a problem using any process or troubleshooting method?

- A. Always start with an accurate description of the problem and as much supporting information as possible.
- B. Always use a divide and conquer approach to eliminate possibilities until you reach the correct solution.
- C. Be proactive, identify problems and remedy them before you have to troubleshoot them.
- D. Always have a positive approach.

Answer: C

Explanation:

QUESTION NO: 17

You need to add a new DNS server to your Linux server. Where would you have to add the new DNS entry in the operating system?

- A. /etc/hosts
- B. /etc/hosts.conf
- C. /etc/sysconfig/network
- D. /etc/nsswitch.conf
- E. /etc/dns.conf
- F. /etc/resolv.conf

Answer: F

Explanation:

QUESTION NO: 18

You are troubleshooting a P1 outage and need to capture traffic between your Cisco core and data center switches. What must be enabled before the capture of packets can be done?

- A. portspan
- B. capture port
- C. spanport
- D. snoop port
- E. portsnoop

Answer: C

Explanation:

QUESTION NO: 19

You are troubleshooting a DNS problem and need to capture and analyze UDP packets on an IBM server running AIX 6.1 software.

Which built-in utility can you use to capture and view packets that enter and exit this server?

- A. tcpdump
- B. udpdump
- C. snoop
- D. sniff
- E. capture
- F. Wireshark

Answer: A

Explanation:

QUESTION NO: 20

According to the ITIL® v3 framework, how should special types of incidents, such as redundant power supply failure, be handled?

- A. Treat the incident as an outage and follow the appropriate process.
- B. Treat the incident as an operational issue and follow the appropriate process.
- C. Treat the incident as a service issue and use the appropriate escalation guidelines.
- D. Treat the incident as a critical issue and trigger management escalation.

Answer: B

Explanation:

QUESTION NO: 21

According to the ITIL® v3 framework, which event status is given the highest priority?

- A. warning
- B. informational
- C. exception
- D. critical

Answer: C

Explanation:

QUESTION NO: 22

How are unauthorized devices installed in the network identified?

- A. by running change management reports
- B. by generating incident management reports
- C. by generating service asset and configuration reports
- D. by generating service level reports

Answer: C

Explanation:

QUESTION NO: 23

How would you identify and assign change risk?

- A. by reviewing impact and probability
- B. by reviewing impact and priority
- C. by reviewing severity and impact
- D. by reviewing severity and probability

Answer: A

Explanation:

QUESTION NO: 24

According to ITIL® v3 framework, which of these is a standard change?

- A. a pre-authorized change
- B. a medium-impact change
- C. a change that needs CAB authorization
- D. a change that needs senior management approval

Answer: A

Explanation:

QUESTION NO: 25

According to the ITIL® v3 framework, who should review the incident reports?

- A. the incident manager
- B. the operations team
- C. the incident and problem manager
- D. the incident, problem, and change manager

Answer: D

Explanation:

QUESTION NO: 26

According to the ITIL® v3 framework, what is the objective of the release and deployment process?

- A. reduce unpredicted impact on the production services
- B. ensure releases are deployed on time
- C. reduce network outages
- D. ensure that devices are configured appropriately

Answer: A

Explanation:

QUESTION NO: 27

According to the ITIL® v3 framework, what is the most important change success criteria?

- A. The device responds to a ping command.
- B. The service(s) are accessible.
- C. The change is completed as per change record.
- D. A user acceptance test is successful.

Answer: D

Explanation:

QUESTION NO: 28

According to the ITIL® v3 framework, why is application profiling critical?

- A. It will give everyone an opportunity to understand how the application will behave on the network.
- B. It will give everyone an opportunity to know the application.
- C. It is good to know what applications are running on the network.
- D. It will help identify unused or outdated applications.

Answer: A

Explanation:

QUESTION NO: 29

You have been asked to configure an Ethernet flow point on a Cisco ASR 9000. The encapsulation for the Ethernet flow point should include VLANs 20, 30, and 40 to 50. Pop the VLAN tag with the symmetric option. Add an output service policy. Add an Ethernet egress filter in strict mode. Why are these requirements not possible?

- A. Multiple VLANs cannot be used with the symmetric option.
- B. Service policies are only supported on the inbound direction for Ethernet flow points.
- C. The maximum supported VLANs on a single Ethernet flow point is 8.
- D. An Ethernet egress filter in strict mode is only for packets with double VLAN tags.

Answer: A

Explanation:

QUESTION NO: 30

Failure of which NMS component can cause the network administrator to not be able to login to any network routers due to authentication errors?

- A. CNR
- B. CAR
- C. ANA
- D. NetCool
- E. ISC
- F. NCM

Answer: B

Explanation:

QUESTION NO: 31

Which native Solaris utility can be used to capture packet flow data entering and exiting the network interface?

- A. pcap
- B. ethtool
- C. snort

- D. portspan
- E. snoop

Answer: E

Explanation:

QUESTION NO: 32

What does this UNIX or Linux command provide?

```
for file in `find . -name '*.txt'`; do perl -i -pe 's|foo|bar|g' $file; done
```

- A. a string search for the words "foo" or "bar"
- B. a string search for the words "foo" and "bar"
- C. a string replacement of the word "foo" to the word "bar"
- D. a list of all text files with the words "foo" or "bar" in them

Answer: C

Explanation:

QUESTION NO: 33

What would this script provide?

```
#!/bin/bash
```

```
for host in 192.168.1.1 192.168.1.2 192.168.1.3
```

```
do
```

```
telnet $host
```

```
echo "ls *.txt"
```

```
echo "logout"
```

```
done
```

- A. A listing of all text files in the remote host's directory.
- B. Nothing, the given host list is not quoted.
- C. Nothing, no login information is provided.

D. Nothing, interactive remote shells are not supported in bash.

Answer: D

Explanation:

QUESTION NO: 34

Refer to the exhibit.

```
#!/usr/bin/perl
# Script name: foo.pl
use strict;
use DBI;
use Date::Calc;
use Term::ReadLine;
sub p {
    my($prompt, $default) = @_;
    my $defaultValue = $default ? "[ $default ]" : "";
    print "$prompt $defaultValue: ";
    chomp(my $input = <STDIN>);
    return $input ? $input : $default;
}
$user = &p("Enter username", "root");
```

The script returns this error:

Global symbol "\$user" requires explicit package name at foo.pl.

What could be the cause of this error?

- A. The sub call has an extra "&" character.
- B. use Global::user has not been declared.
- C. Strict vars are in use.
- D. The global symbol for users must be declared.

Answer: C

Explanation:

QUESTION NO: 35

What is the simplest method for detecting invalid or unauthorized changes?

- A. Complete a weekly reactive review of change control tickets.
- B. Use exception reporting from syslog indicating access to a device in privileged mode and compare this report to the change record to identify possible unauthorized changes.
- C. Ensure there is strong policy in place; that any violation of change or configuration management processes will result in immediate termination.
- D. Verify the success of network changes.

Answer: B

Explanation:

QUESTION NO: 36

You have just completed periodic trend analysis of the network traffic. The trend is within expectations and within current network capacity. What should be the next step?

- A. Nothing - continue monitoring.
- B. Documentation of the trend analysis results - continue monitoring.
- C. Formal notification of the results to capacity planning and network engineering - continue monitoring.
- D. Begin service take-up trend analysis.

Answer: B

Explanation:

QUESTION NO: 37

Which method of traffic analysis allows you to consider the effect of growth and failures on the existing network?

- A. traffic trend analysis
- B. service take-up trend analysis
- C. modeling the network
- D. NetFlow analysis

Answer: C

Explanation:

QUESTION NO: 38

You are monitoring a corporate network when a number of routers begin reporting high CPU utilization. Console alarms indicate detection of excessive BPDUs. What is the probable cause of these threshold crossing alarms?

- A. multiple broken VLANs
- B. Spanning Tree Protocol failure
- C. route flapping
- D. loss of access to the Internet

Answer: B

Explanation:

QUESTION NO: 39

A router in your network has been reporting threshold crossing alarms over the past few weeks. Investigation into these alarms has not yielded a specific cause and end users attached to the device have not complained about access to services or their performance. What is most the most likely reason for these threshold crossing alarms?

- A. It is an intermittent problem and will be very difficult to troubleshoot.
- B. It is likely that a hardware problem will reveal itself when the hardware degrades further.
- C. It is likely that the threshold setting that is alarming is too low for this particular platform in its particular situation.
- D. It is likely a software or firmware problem and will fix itself in a future upgrade.

Answer: C

Explanation:

QUESTION NO: 40

Refer to the exhibit.


```
FastEthernet0/9 is up, line protocol is up
  Hardware is Fast Ethernet, address is 0030.80cb.848a (bia 0030.80cb.848a)
  MTU 1500 bytes, BW 10000 Kbit, DLY 1000 usec, rely 255/255, load 19/255
  Encapsulation ARPA, loopback not set, keepalive not set
  Half-duplex, 10Mb/s, 100BaseTX/FX
  ARP type: ARPA, ARP Timeout 04:00:00
  Last input 00:00:58, output 00:00:00, output hang never
  Last clearing of "show interface" counters 00:27:20
  Queueing strategy: fifo
  Output queue 0/40, 0 drops; input queue 0/75, 0 drops
  5 minute input rate 756000 bits/sec, 102 packets/sec
  5 minute output rate 755000 bits/sec, 103 packets/sec
    266133 packets input, 221224365 bytes, 0 no buffer
    Received 193 broadcasts, 0 runts, 0 giants, 0 throttles
    0 input errors, 0 CRC, 0 frame, 0 overrun, 0 ignored, 0 abort
    0 watchdog, 193 multicast
    0 input packets with dribble condition detected
  266470 packets output, 221349268 bytes, 0 underruns
  465 output errors, 115 collisions, 0 interface resets
    0 babbles, 465 late collision, 14137 deferred
    0 lost carrier, 0 no carrier
    0 output buffer failures, 0 output buffers swapped out
```

Which statement is true?

- A. Layer 1 has a problem.
- B. Layer 2 has a problem, but layer 1 is functioning properly.
- C. Layer 3 has a problem, but layers 1 and 2 are functioning properly.
- D. Layer 4 has a problem, but layers 1 through 3 are functioning properly.

Answer: A

Explanation:

QUESTION NO: 41

You have built a new facility and are now testing connectivity. All routers at the new facility can ping their directly connected neighbors, but cannot ping any other routers. Which statement is true?

- A. A layer 1 issue at the facility prevents all other layers from operating.
- B. Layer 1 is operational, but an issue with layer 2 causes frame errors.
- C. Layer 2 is operational, but layer 1 issues prevent packet forwarding.
- D. Layers 1 and 2 are working properly, but layer 3 needs more information to forward packets.

Answer: D

Explanation:

QUESTION NO: 42

When a traceroute is executed, if a packet does not return within the expected timeout window, what is printed to the screen?

- A. an exclamation point (!)
- B. a period (.)
- C. an asterisk (*)
- D. Time Out
- E. TTL expired

Answer: C

Explanation:

QUESTION NO: 43

Cisco IOS XR Software was designed with three partitions or separate planes. Which are the three planes?

- A. control, data, and management
- B. application, data, and management
- C. control, services, and management
- D. application, services, and data
- E. data, services, and control

Answer: A

Explanation:

QUESTION NO: 44

Which process is a fundamental process and the foundation of Cisco IOS XR Software that is responsible for restarting other processes as predefined by Respawn flag ON or OFF?

- A. RIB
- B. FIB
- C. netIO
- D. sysdb
- E. sysmgr
- F. wdsysmon

Answer: E

Explanation:

QUESTION NO: 45

You use a method of procedure for a planned configuration change with a software upgrade on a router. If the software was corrupt, which section of the method of procedure would you refer to?

- A. backout procedures
- B. reload procedures
- C. reinstall procedures
- D. terminal report procedures

Answer: A

Explanation:

QUESTION NO: 46

Which commands could be used to verify that the software upgrade change was completed properly on a Cisco IOS router?

- A. show software version
- B. show version
- C. show disk
- D. show target configuration
- E. show upgrade complete

Answer: B

Explanation:

QUESTION NO: 47

Which management process flow includes these elements?

- perform planned or unplanned upgrades
- install or configure network devices

- execute NRFU or operational validation tests

- set QOS policies and mechanisms

- A. incident management
- B. configuration management
- C. change management
- D. performance management

Answer: B

Explanation:

QUESTION NO: 48

Your company has deployed a new Cisco router into the core network. Your network fault management system is receiving events from the new device, but the NMS console is showing only the following.

.1.3.6.1.4.1.9.9.117.1.2.1.1.2.7

What is the cause of this event?

- A. The device is not responding to the inventory requests from the fault management system.
- B. The fault management system is not communicating with the ticketing system.
- C. The fault management system is not communicating with the TACACS server.
- D. The fault management system does not have the correct MIBs loaded to support the device.

Answer: D

Explanation:

QUESTION NO: 49

While troubleshooting network issues, which of these can a ping test be used to determine?

- A. network jitter
- B. whether a device can communicate with another device over the network
- C. the network path that packets take as they are forwarded in the network
- D. network routes

E. connection timing

Answer: B

Explanation:

QUESTION NO: 50

On the CRS-1, which two packages exist only on the RP but not on the MSC or line card?
(Choose two.)

- A. routing
- B. line card
- C. forwarding
- D. base
- E. admin
- F. mbi

Answer: A,E

Explanation:

QUESTION NO: 51

According to the ITIL® v3 framework, which six processes identify functions of service transition planning and support? (Choose six.)

- A. change management
- B. performance management
- C. release and deployment management
- D. service asset and configuration management
- E. incident management
- F. problem management
- G. knowledge management
- H. transition planning and support
- I. service validation and testing
- J. availability management

Answer: A,C,D,G,H,I

Explanation:

QUESTION NO: 52

Which two statements about process in Cisco IOS and IOS XR Software are true? (Choose two.)

- A. In Cisco IOS Software, a higher priority process can interrupt.
- B. In Cisco IOS XR Software, a process failure could corrupt another process's memory space.
- C. In Cisco IOS XR Software, the default priority is 10.
- D. In Cisco IOS Software, all processes share the same virtual space.
- E. In Cisco IOS XR Software, all processes share the same virtual space.

Answer: C,D

Explanation:

QUESTION NO: 53

What are two valid reasons to upgrade Cisco IOS XR Software? (Choose two.)

- A. A few software bugs that have no service impact.
- B. There are no rules for this device in the policy table.
- C. A new line card needs to be added, and it is not supported in the current installed release.
- D. Current bandwidth utilization is poor, and bandwidth efficiency needs to be increased.
- E. Already running BGP, and need a specific BGP feature that is not supported in current installed release.

Answer: C,E

Explanation:

QUESTION NO: 54

Which two statements about SNMP in Cisco IOS and IOS XR Software are true? (Choose two.)

- A. Informs are not supported in Cisco IOS XR Software.
- B. Informs are not supported in Cisco IOS Software.
- C. SNMPv3 is not supported in Cisco IOS Software.
- D. MIBs in Cisco IOS XR Software are handled by four different mibd processes, which are controlled by snmpd.
- E. SNMPv3 privacy (encryption) is not supported in Cisco IOS XR Software.

Answer: A,D

Explanation:

QUESTION NO: 55

Which four criteria determine when to escalate an incident to a vendor? (Choose four.)

- A. severity of incident
- B. personal relationships with vendors
- C. escalation procedures
- D. applicable service level agreements
- E. CIO request from Fortune 500 company with no SLA
- F. support agreement with vendor

Answer: A,C,D,F

Explanation:

QUESTION NO: 56

Which three conditions have the highest probability of immediate escalation? (Choose three.)

- A. automated response
- B. when the cause is not immediately known
- C. per SLA requirements
- D. when Level-2 support has nothing in its queue
- E. when there is substantial impact and risk to the business

Answer: A,C,E

Explanation:

QUESTION NO: 57

According to Cisco leading practices, which four benefits can be realized from a reactive review of trouble tickets? (Choose four.)

- A. identification of recurring issues that may indicate a problem
- B. justification for budget to add headcount so this task can be performed proactively
- C. identification of a problem in a particular hardware platform or line card
- D. identification of excessive complaints from particular groups or individuals
- E. identification of a skills deficit or training need for one or more members of the staff

- F. identification of opportunities for improvement in the change management process
- G. identification of a bug in a specific release of software

Answer: A,C,E,G

Explanation:

QUESTION NO: 58

Which six items can be realized using the baseline process? (Choose six.)

- A. gain valuable information on the health of hardware and software
- B. determine the current utilization of network resources
- C. make accurate decisions about network alarm thresholds
- D. verify compliance with network configuration standards
- E. identify current network problems
- F. predict future problems
- G. categorize network faults
- H. verify the success of network changes
- I. predict future capacity needs with trending

Answer: A,B,C,E,F,I

Explanation:

QUESTION NO: 59

Which four alerts can be threshold crossing alerts? (Choose four.)

- A. CPU utilization
- B. state changes in HA
- C. excessive temperature
- D. physical access
- E. configuration compliance
- F. topology changes

Answer: A,B,C,F

Explanation:

QUESTION NO: 60

According to the ITIL® v3 framework, what four benefits are realized from release management in the service transition process? (Choose four.)

- A. the opportunity to plan expenditure and resource requirements in advance
- B. a structured approach to rolling out all new software or hardware, which is efficient and effective
- C. changes to software are "bundled" together for one release, which minimizes the impact of changes on users
- D. validation and acceptance of services by users before services are put in the production environment
- E. testing before rollout, which minimizes incidents that affect users and requires less reactive support
- F. certification of hardware used in rollout to meet criteria specified for the production environment

Answer: A,B,C,E

Explanation:

QUESTION NO: 61

You have been working an incident and you think you have determined the cause. You are now ready to take corrective action. Which three options should you use as a guideline for implementing your change? (Choose three.)

- A. Make sure you can back out any changes you make.
- B. Open a new ticket before making any change to the network.
- C. If there are multiple causes, make the transparent changes first.
- D. Brainstorm the change with peers for potential impact.
- E. Make all changes at one time to minimize customer impact.
- F. Maintain a physical connection to the console or aux port to ensure that your change does not lock you out of the device.

Answer: A,C,D

Explanation:

QUESTION NO: 62

Which two options are reasons that the CMDB should be up-to-date. (Choose two.)

- A. The information is useful during change management.
- B. It helps during the asset audit process.
- C. It helps during Gramm-Leach-Bliley audit.

D. It helps understand staff utilization.

Answer: A,B

Explanation:

QUESTION NO: 63

Information from which three sources can be used to identify proactive network maintenance activities? (Choose three.)

- A. alerts from the performance management systems
- B. alerts from the capacity management systems
- C. alerts from the compliance management systems
- D. alerts from service level management systems
- E. alerts from the incident management system
- F. alerts from the fault management systems

Answer: A,B,E

Explanation:

QUESTION NO: 64

Trouble tickets are scrubbed for which two reasons? (Choose two.)

- A. to ensure the tickets are accurate
- B. to ensure all change tickets are eliminated
- C. to generate service level management reports
- D. to identify configuration consistency

Answer: A,C

Explanation:

QUESTION NO: 65

According to the ITIL® v3 framework, which two options are the goals of configuration management? (Choose two.)

- A. optimize service assets and capabilities

- B. optimize service levels
- C. minimize compliance issues
- D. minimize incident management

Answer: A,C

Explanation:

QUESTION NO: 66

According to the ITIL® v3 framework, what two actions can you do after you establish a configuration baseline? (Choose two.)

- A. Restore the configuration during service recovery.
- B. Assemble all relevant components to prepare for a change.
- C. Identify all the incidents associated with a configuration item.
- D. Build a service component from a defined set of inputs.

Answer: B,D

Explanation:

QUESTION NO: 67

According to the ITIL® v3 framework, which two options are the best way to manage device configurations? (Choose two.)

- A. standardize on global configuration templates
- B. have a robust asset management system
- C. have a central repository of approved configuration
- D. enforce change management procedures

Answer: A,C

Explanation:

QUESTION NO: 68

What two items are typically reviewed during the post-change implementation review process? (Choose two.)

- A. the cause of change failures
- B. number of network events identified
- C. number of unauthorized changes
- D. number of service level agreements

Answer: A,C

Explanation:

QUESTION NO: 69

According to the ITIL® v3 framework, which two statements define change success? (Choose two.)

- A. Met request for change (RFC) criteria.
- B. Successfully completed a few minutes after the change window.
- C. Change completed with minor modification to the implementation plan.
- D. No network outage after the change.

Answer: A,C

Explanation:

QUESTION NO: 70

Which three areas could be impacted by a change in the network environment? (Choose three.)

- A. as-built network documentation
- B. disaster recovery plan
- C. critical success factors
- D. service level agreements
- E. network management KPI

Answer: A,B,D

Explanation:

QUESTION NO: 71

Which three reasons explain why the network documentation should remain current? (Choose three.)

- A. to meet ISO 9001 requirements
- B. to understand and make changes to the network environment
- C. increases MTTR
- D. to understand the current inventory of devices
- E. to obtain the current network statistics

Answer: A,B,D

Explanation:

QUESTION NO: 72

Two of the core routers are not able to establish routing protocol adjacency with each other. To best effectively troubleshoot this issue, which four things should be verified? (Choose four.)

- A. The routers interface link that provides connectivity between the two routers is in the UP state.
- B. The routing protocol configurations on each router match (such as routing protocol timers and routing protocol authentication).
- C. NTP is configured on both routers and the clocks are synchronized between the two routers.
- D. The two routers can ping each other.
- E. If a firewall exists in the path between the two routers, it is properly configured.
- F. The MPLS (LDP) adjacency is up between the two routers.

Answer: A,B,D,E

Explanation:

QUESTION NO: 73

The CNR server in the network has gone down. Which two network services may be affected by this event? (Choose two.)

- A. DHCP
- B. TFTP
- C. DNS
- D. AAA
- E. FTP
- F. NetFlow

Answer: A,C

Explanation:

QUESTION NO: 74

According to Cisco IOS Management Best Practices, which eight items are included in the Global Standard Configuration Template? (Choose eight.)

- A. service commands
- B. IP commands
- C. VTY commands
- D. console port commands
- E. logging commands
- F. device commands
- G. AAA commands
- H. SNMP commands
- I. banner commands
- J. HA commands

Answer: A,B,C,D,E,G,H,I

Explanation:

QUESTION NO: 75

According to Cisco IOS Management Best Practices, which four areas are specified for configuration consistency? (Choose four.)

- A. Global Standard Configuration Template
- B. Device Naming Convention
- C. Sample Protocol Standard Configuration Template
- D. HA Standards Template
- E. IP Standards Template
- F. Documentation Standards Template
- G. Configuration Restoration Convention

Answer: A,B,C,E

Explanation:

QUESTION NO: 76

According to Cisco IOS Management Best Practices, which three attributes should be fulfilled in the Device Naming Convention? (Choose three.)

- A. identify the device

- B. name the device
- C. device type
- D. device location
- E. device hierarchy

Answer: A,C,D

Explanation:

QUESTION NO: 77

Which four items are necessary to ensure compliance with global configuration templates? (Choose four.)

- A. A well-defined Service Asset Configuration Management process based on leading practices and supported by organizational policy.
- B. Regular auditing of all devices for configuration compliance and proper handling of exceptions found.
- C. Pushing configuration updates to affected devices when a change to configuration standards is necessary.
- D. Always use the global configuration templates stored on your laptop rather than copying a configuration off a similar device.
- E. Never make unauthorized changes.
- F. Effective change control process and policy will always guarantee accurate configuration information for all devices associated with any change.

Answer: A,B,C,E

Explanation:

QUESTION NO: 78

What are the four primary areas of analysis in measuring network performance? (Choose four.)

- A. traffic trend analysis
- B. service take-up trend analysis
- C. NetFlow analysis
- D. change rate analysis
- E. incident rate analysis
- F. syslog analysis

Answer: A,B,D,E

Explanation:

QUESTION NO: 79

According to the ITIL® v3 framework, which four categories are used to prioritize a Request for Change? (Choose four.)

- A. standard
- B. immediate (emergency)
- C. medium
- D. high
- E. intermediate
- F. low

Answer: B,C,D,F

Explanation:

QUESTION NO: 80

Which two opportunities for improvement are realized by trending the metrics for the total number of trouble tickets by severity per period (total and by support queue)? (Choose two.)

- A. better incident resource allocation
- B. collection of information relating to the incidents for higher-tier analysis
- C. understanding the effects of the incident management process improvements
- D. identifying the rate of change

Answer: A,C

Explanation:

QUESTION NO: 81

According to the ITIL® v3 framework, which four measurements or measurement modifications can contribute to improvement opportunities in traffic patterns or threshold crossing alarms? (Choose four.)

- A. Implementing hold-down timers on specific alerts that more accurately reflect the impact of an event on performance.
- B. Identify service take-up trends in monitoring network traffic to determine the adoption and

growth of services offered across the network.

- C. Evaluate the impact the rate of incidents have on change.
- D. Evaluate the impact the rate of incidents have on performance.
- E. Evaluate the impact the rate of change has on performance.
- F. Evaluate the impact the rate of configuration item inconsistencies have on change.

Answer: A,B,D,E

Explanation:

QUESTION NO: 82

You have just completed a comprehensive study of the traffic patterns in your network. As you review the results, you discover a remote office that has not had any particular problems. However, the volume of voice quality related tickets has increased in the last two weeks. Which two possible causes would the traffic study show? (Choose two.)

- A. The route to this office is suboptimal and during peak traffic may cause a delay in packet delivery.
- B. The circuit to this office has excessive errored seconds continuously through the day.
- C. The circuit to this office is significantly oversubscribed.
- D. QoS is missing from the circuit configuration to this site.
- E. The circuit to this location experiences brief periods of congestion and excessive retransmits during these periods.

Answer: A,D

Explanation:

QUESTION NO: 83

What are the three most important concepts to remember about successful troubleshooting? (Choose three.)

- A. The best troubleshooters are born with a "gut" feel for solving problems.
- B. The network system you are troubleshooting must be well defined with knowledge and documentation.
- C. Network engineers that are effective troubleshooters succeed because of their ability to use diagnostic systems and software.
- D. The most successful troubleshooters develop a process, use it consistently, and constantly improve its effectiveness.
- E. Divide and conquer. Do not try to fix it, but narrow it down to its root cause.

Answer: B,D,E

Explanation:

QUESTION NO: 84

Which four common tools are used to troubleshoot networks using the Operations, Administration, and Maintenance methodology? (Choose four.)

- A. ping
- B. bash
- C. traceroute
- D. nslookup
- E. pong
- F. snoop

Answer: A,C,D,F

Explanation:

QUESTION NO: 85

Which two are benefits of proactive network maintenance? (Choose two.)

- A. gives an opportunity to prevent an outage
- B. gives an opportunity to resolve network incidents
- C. gives an opportunity to reduce change incidents
- D. gives an opportunity to update network devices

Answer: A,D

Explanation:

QUESTION NO: 86

Which four methods are used to notify operations that a parameter has exceeded a predetermined baseline value? (Choose four.)

- A. SNMP trap
- B. LEDs on processor
- C. threshold crossing alert

- D. syslog message
- E. configuration snapshot
- F. console alarm
- G. LEDs on line cards

Answer: A,C,D,F

Explanation:

QUESTION NO: 87 DRAG DROP

When troubleshooting NMS issues, you notice that a firewall in the network is blocking the UDP ports listed on the right. Determine which NMS component will be effected by each port by dragging the NMS component on the left to the UDP ports on the right. Not all the NMS components are used.

SYSLOG	UDP 53
SNMPv2	UDP 123
AAA (RADIUS)	UDP 1812/1813
NTP	
NetFlow	
DNS	
DHCP	
TFTP	

Answer:



When troubleshooting NMS issues, you notice that a firewall in the network is blocking the UDP ports listed on the right. Determine which NMS component will be effected by each port by dragging the NMS component on the left to the UDP ports on the right. Not all the NMS components are used.

SYSLOG	DNS
SNMPv2	NTP
AAA (RADIUS)	AAA (RADIUS)
NTP	
NetFlow	
DNS	
DHCP	
TFTP	

Explanation: DNSUDP 53

NTPUDP 123

AAA (RADIUS)UDP 1812/1813

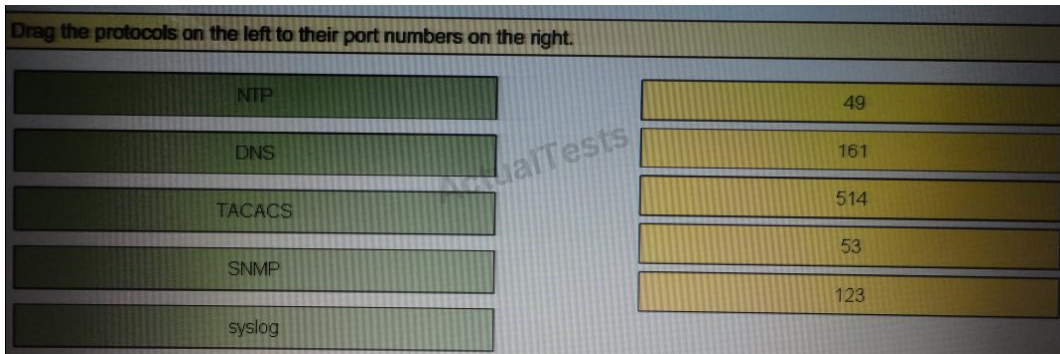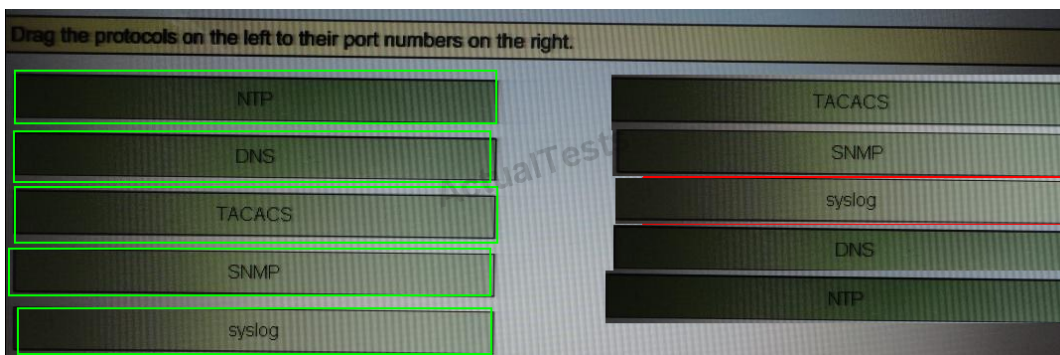QUESTION NO: 88 DRAG DROP**Answer:****Explanation:** NTP123


DNS53

TACACS49


SNMP161

Syslog514

QUESTION NO: 89 DRAG DROP

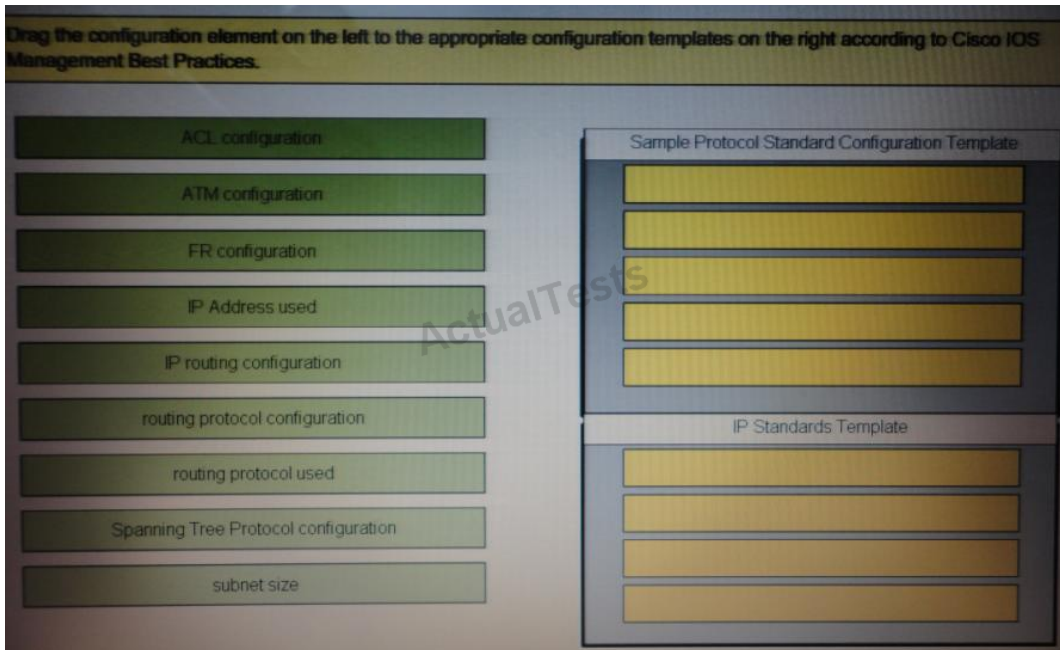

Answer:

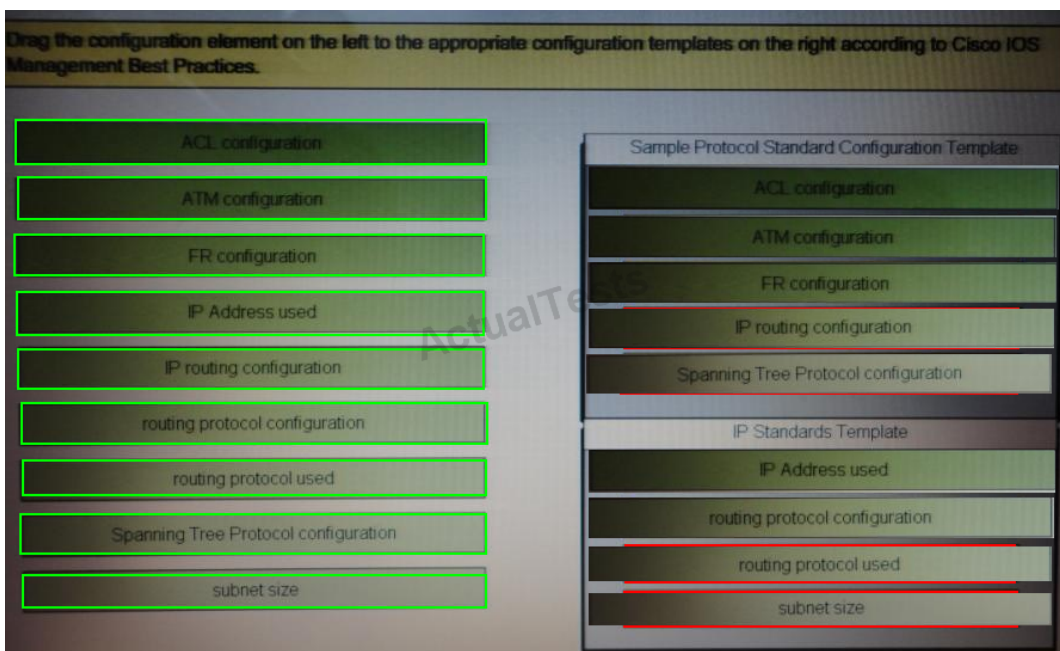

Explanation:

Sample Protocol Standard Configuration Template:

ACL Configuration

ATM Configuration

FR Configuration

IP Routing Configuration

Spanning Tree Configuration

IP Standards Template:

IP Address used

Routing Protocol Configuration

Routing Protocol used

Subnet Size