












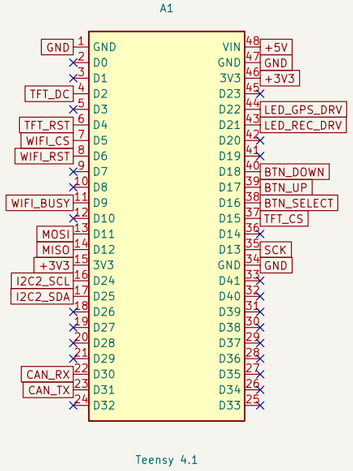



























Pin map from YamuraHubV6.1 src/main.h. SD card: Teensy 4.1 built-in slot (SD.begin(BUILTIN_SDCARD)); display SD_CS not connected.

JP1 open by default: ST7796 SDO does not tri-state and would contend with the AirLift on MISO. A3 (Waveshare) has a fixed 120R terminator: remove it if both DB9s are used (hub mid-bus).

Teensy 4.1: cut the VUSB–VIN pad so USB and the 12V supply are not tied together. CAN = FlexCAN_T4FD<CAN3> on pins 30 (CRX3) / 31 (CTX3).

2-layer through-hole carrier: Teensy 4.1 + AirLift, SN65HVD230 CAN board, 4in SPI display

Yamura Motors LLC

Sheet: /
File: YamuraHub_T41.kicad_sch

Title: YamuraLog Hub — Teensy 4.1

Size: A3	Date: 2026-10-28	**Rev: B**
KiCad E.D.A. 10.0.4		Id: 1/1