


B | QKV demand and native-tile balance

Logical traffic; each 128×128 tile loaded once, serves U vectors


(a) Qwen3.5-2B

$D=2,048$; $N_{proj}=5,120$; load=10 MiB

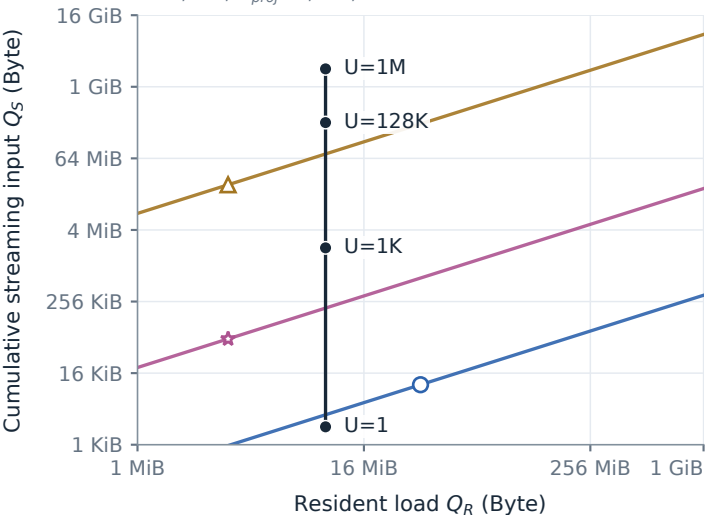

(b) MiMo-V2.5-Pro

$D=6,144$; $N_{proj}=27,136$; load=159 MiB

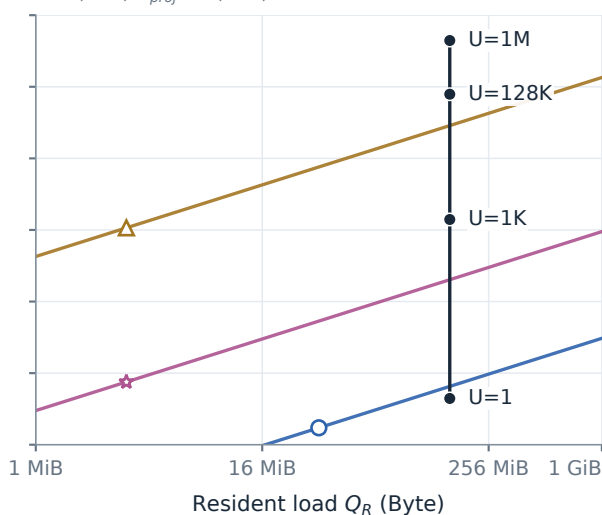

—○— SRAM ACIM ($U^* = 1.60$) —☆— 3D FeFET ($U^* = 99.4$) —△— 2D NOR ($U^* = 38.0K$)

Typical hardware references • ray: $Q_S = Rl_{eff}^* Q_R$

Above each ray: streaming-bound | Below each ray: resident-bound