


Ten CIM technologies in the ρ - τ plane


Linear axes throughout · Numerical slope from the origin: $k = \rho/\tau = \text{RI}^*$ · Rates in decimal MB/s

△ Short budget ● Typical / reference ▽ Long budget ✕ Gain-cell long: stresst - - $\rho = \tau$ ($k = 1$)


A Full range | all 30 scenario points; unequal display scales

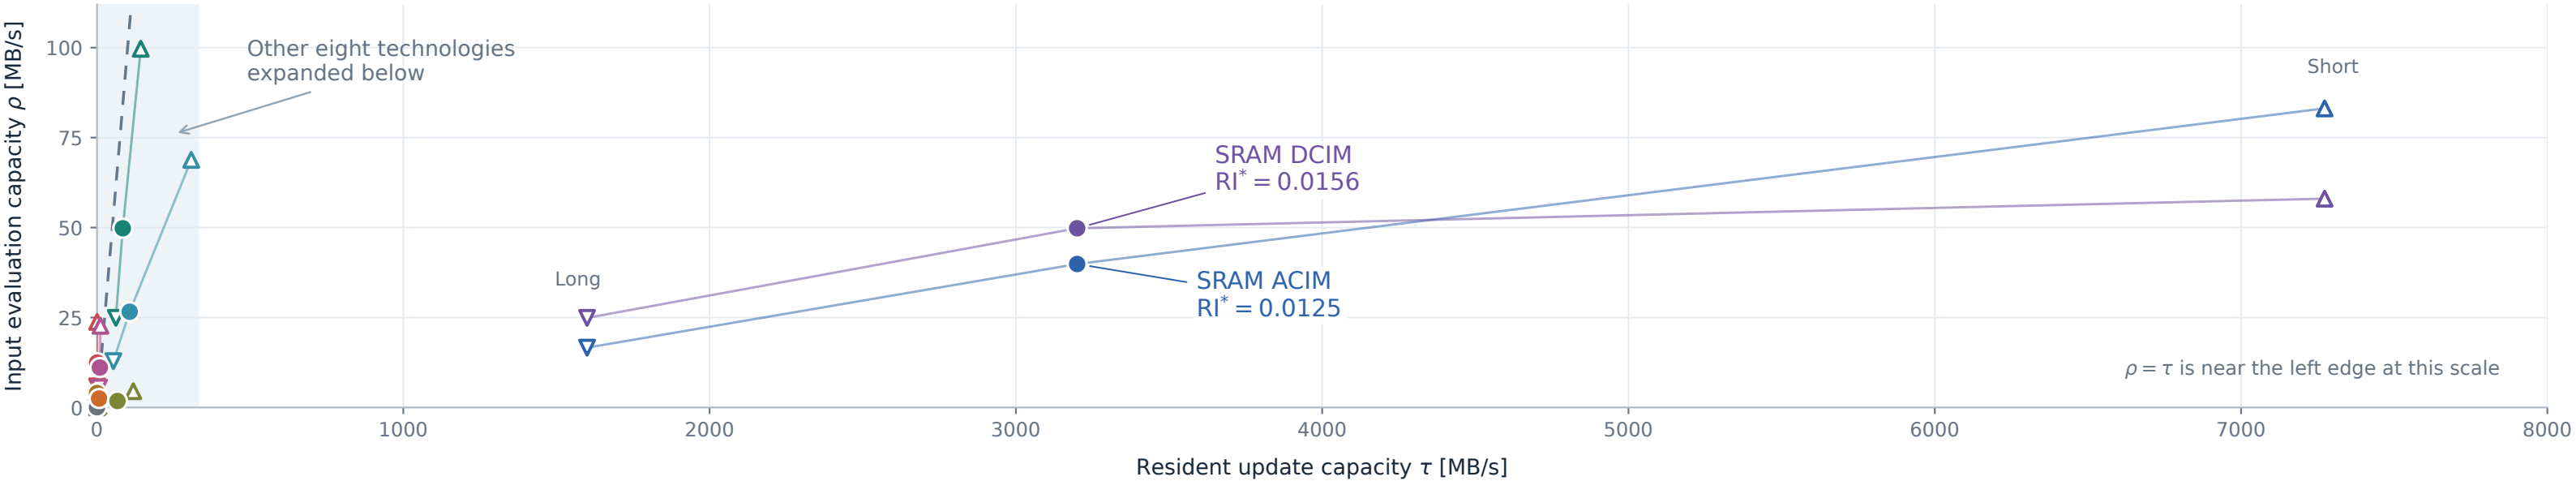


B Balance region | equal axis scale

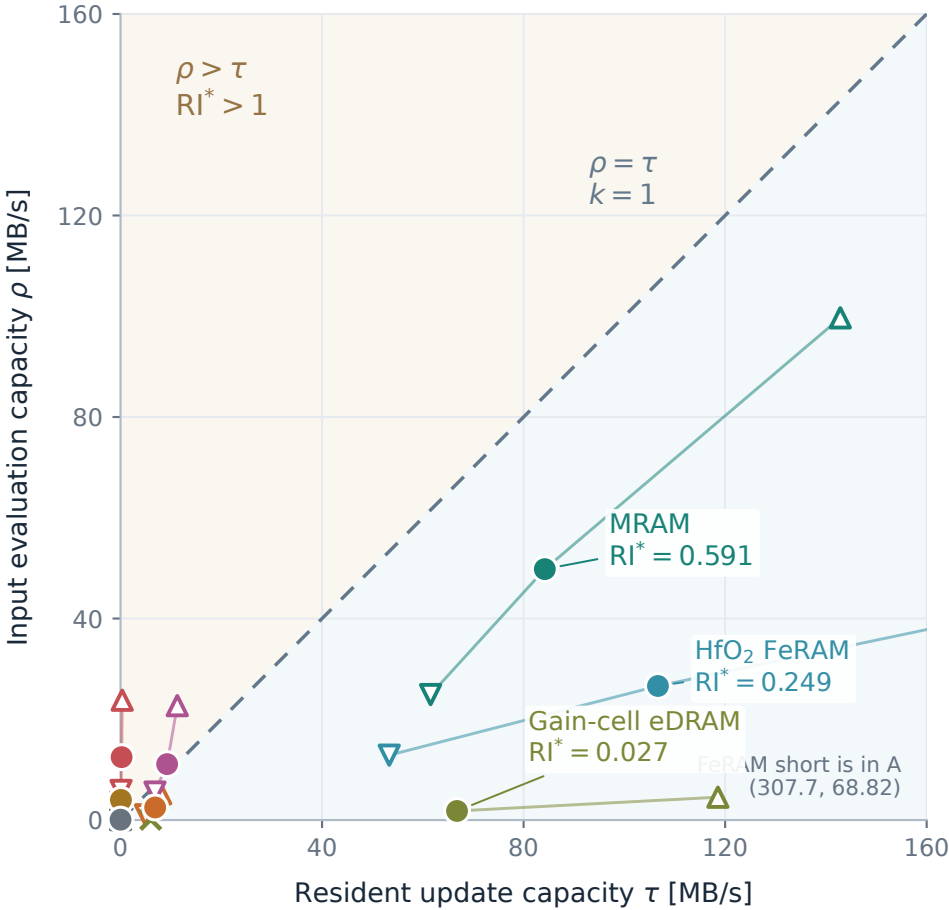

C Near origin | equal axis scale

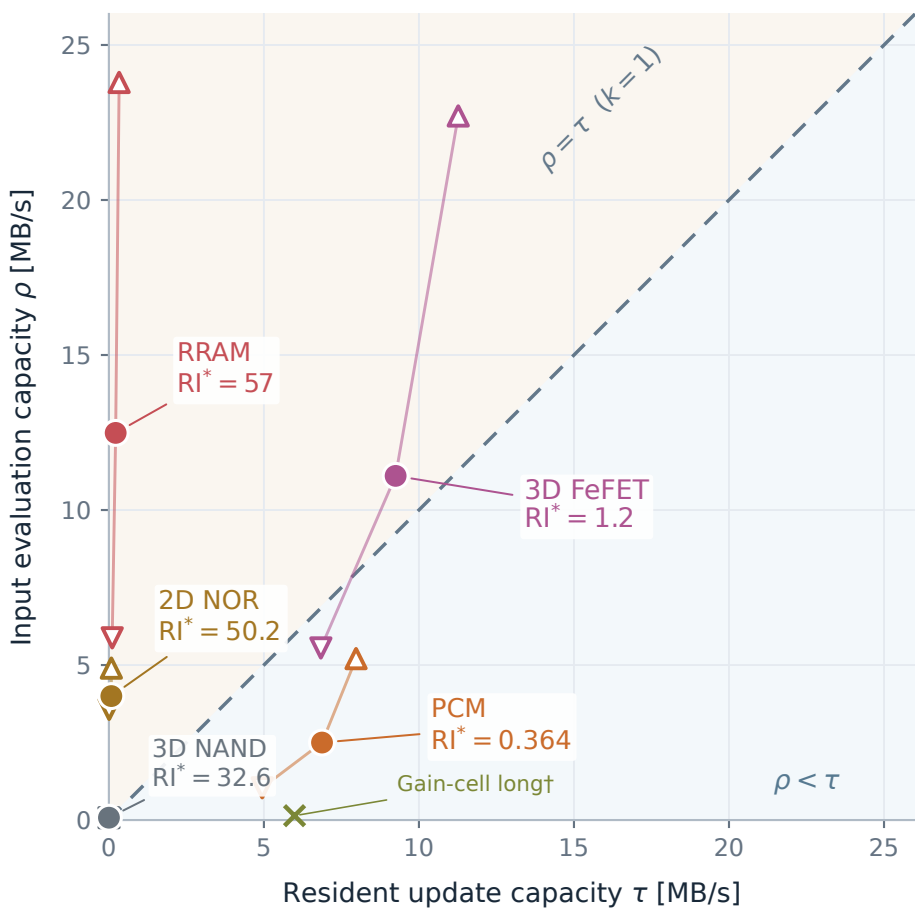

D Slow-update detail | unequal scales

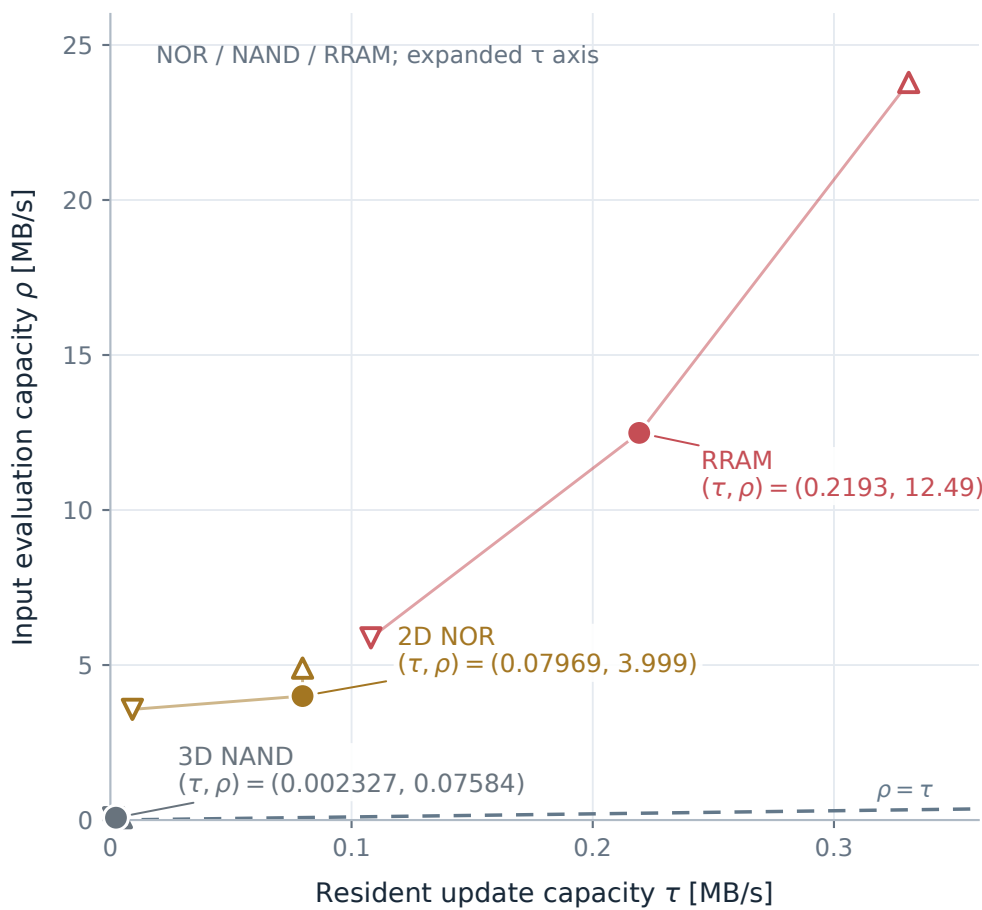

Colors identify technologies. Labels report typical RI^* in A-C; D lists typical (τ, ρ) . Thin connections only associate paired scenarios.

† Gain-cell long is a refresh stress point (3.93% availability), shown separately without an ordinary-range connection. Its typical point includes refresh.

B and C preserve geometric slopes: the $k = 1$ line is 45°. A and D expand one axis for visibility; judge balance against the dashed line, not its visual angle.