

Terms of Reference:

Satellite-based AI Environmental Monitoring of the ÇİMSA Cement Manufacturing Plant in Mersin

for the

Project Limestone – Türkiye

CONTENTS

1 Background	2
2 Objectives of the Assignment	3
3 Applicable E&S Requirements	4
4 Methodology	7
5 Scope Of Work	10
5.1 Task 1: Desktop Review & Data Collection	10
5.2 Task 2: Dust Source Mapping and Receptor Identification	11
5.3 Task 3: Site Visit	11
5.4 Task 4: Initial Screening	11
5.5 Task 5: Modelling and Monitoring Strategy Development	11
5.6 Task 6: Final Dust Management Plan and Reporting	12
6 Implementation Arrangements	12
7 Deliverables	12
8 Parallel Contributions by CIMSA	13
9 Proposal and Contracting Requirements	14

1 | BACKGROUND

The European Bank for Reconstruction and Development (EBRD) is considering a EUR 50 million long-term senior unsecured loan to Çimsa Çimento Sanayi ve Ticaret A.Ş. (“ÇİMSA” or “the Company”) to support its decarbonisation investments, including the construction of a new Calcium Aluminate Cement (CAC) kiln at the Mersin cement manufacturing plant (the “Project”). As part of this initiative, the EBRD has undertaken an Environmental and Social Due Diligence (ESDD) of existing and planned activities of the Company within the scope of the Project against applicable local, national and international requirements, including the EBRD’s Environmental and Social Policy (ESP, 2024) and the incorporated Environmental and Social Standards (ESRs), and relevant European Union (EU) requirements and relevant international conventions and protocols relating to environmental and social issues, as transposed into national legislation.

A high-level assessment conducted under the ESDD framework has found that the Mersin cement facility is largely compliant with the Best Available Techniques (BAT) Conclusions for the Production of Cement, Lime and Magnesium Oxide. However, several partial non-compliances have been identified, particularly in relation to dust and flue gas emissions. These emissions pose potential risks to both the workforce and surrounding communities, particularly those located near quarries, access roads, and within nearby settlements.

In response, ÇİMSA is committed to developing and implementing a robust Dust Management Plan (DMP) to address these issues as part of the Environmental and Social Action Plan which has been agreed between EBRD and ÇİMSA as a response to ESDD findings. The DMP will be designed to reduce flue gas and fugitive dust emissions and minimise their environmental and social impacts. It will be based on sound methodologies for dust source inventory development, operational controls, maintenance practices, and ambient dust monitoring.

The DMP will be implemented in parallel with other relevant management plans, including the Stakeholder Engagement Plan. To complement the Dust Management Plan (DMP) and fulfil the EBRD’s Environmental and Social Action Plan (ESAP) requirements with an independent review, **the integration of satellite-based remote sensing and AI analytics is proposed**. This approach will enhance the accuracy, independence, and efficiency of dust source mapping and impact assessment. It will support ÇİMSA in demonstrating reductions in flue gas and fugitive dust emissions, strengthening environmental compliance, and providing transparent, data-driven evidence of progress. The assignment will deliver a robust, technology-enabled monitoring solution, enabling the Project Limestone’s compliance with ESAP and hence, in compliance with EBRD’s ESR3.

ÇİMSA, a subsidiary of Sabanci Holding, was founded in Mersin in 1972. Mersin cement manufacturing plant is located in Toroslar neighbourhood of Akdeniz district of Mersin province located in Southern Türkiye (figure 1). The distance of the site to Mersin port is approximately 16 km.

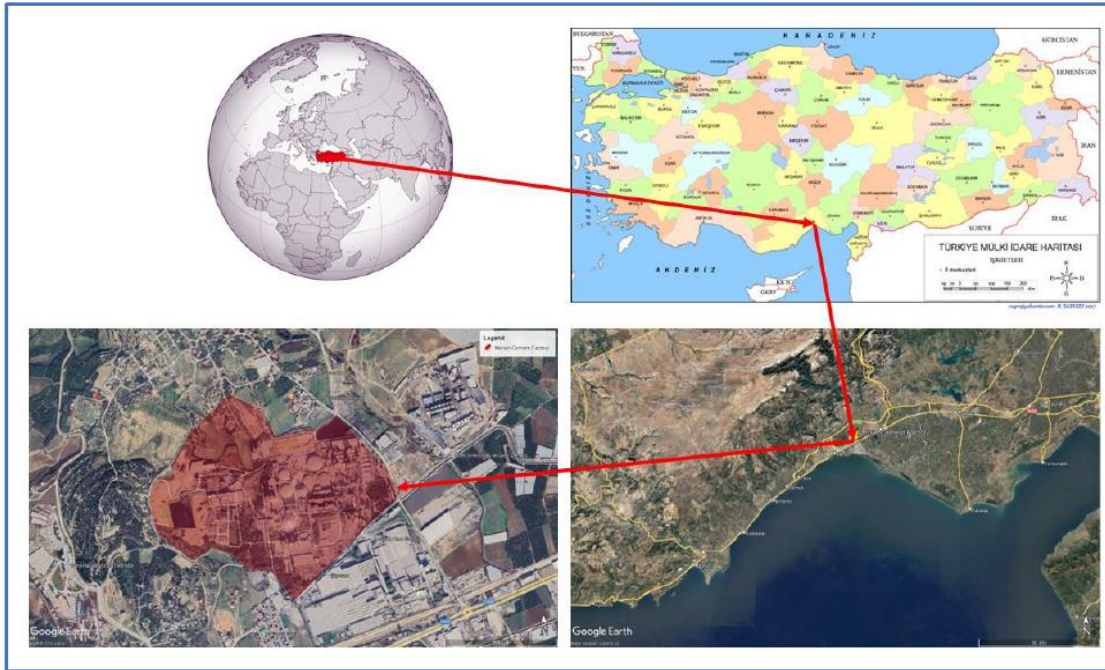


Figure 1: Location of Mersin Cement Manufacturing Plant

The site is located in an industrial setting surrounded by residential and agricultural areas where the nearest settlements, Tekke and Yaka neighborhoods, are located approximately 400 m to the north and 300 m to the southwest of the site, respectively.

2 | OBJECTIVES OF THE ASSIGNMENT

The main objective of the Assignment is to develop a dust monitoring model that leverages generative AI to estimate fugitive dust emissions, including those dispersed from ÇİMSA's Mersin plant. This will be supported by a detailed analysis of the various dust types generated at different stages of cement production, including their sources, composition, and characteristics. The outcome will enable a more targeted and effective approach to monitoring and mitigating dust emissions.

The dust type analysis will include:

• Raw Material Dust (Pre-Kiln Process)

Source: Crushing, grinding, and handling of raw materials.

Composition: Primarily consists of calcium carbonate (CaCO_3), silica (SiO_2), alumina (Al_2O_3), and iron oxide (Fe_2O_3). Characteristics: These are coarse particles, mostly non-reactive, which can be monitored effectively using optical sensors to measure dust levels and distribution around material handling areas.

• Kiln and Clinker Dust (Process Dust)

Source: Operations involved in kiln heating, calcination, and clinker cooling.

Composition: Includes calcium oxide (CaO), silica (SiO_2), alumina (Al_2O_3), sulfates (SO_4^{2-}), alkali metals (Na_2O , K_2O), and trace heavy metals.

Characteristics: Fine, reactive particles, with potential for alkali volatilisation.

• Cement Dust (Post-Clinker, Grinding, and Packing)

Source: Clinker grinding, cement milling, storage, and packaging operations.

Composition: Composed of Portland cement minerals (C_3S , C_2S , C_3A , C_4AF), gypsum ($CaSO_4 \cdot 2H_2O$), and common additives such as fly ash, slag, and limestone.

Characteristics: Very fine powder, which poses respiratory hazards due to its alkaline nature and small particle size. This type of dust will be monitored using high-resolution spectroscopy to analyse dust dispersion and sedimentation patterns.

The following outlines the key components of this assignment:

1. Monitoring these particles will utilise infrared and LIDAR technologies to detect fine particulate matter and gaseous emissions from high-temperature processes.
2. To accurately identify the delta in detectable particulate matter, it is imperative to establish a pre-operational baseline for air quality and dust levels using historical satellite data.
3. To perform an ongoing analysis over time of satellite imagery to detect the changes in dust and pollution and create a timelapse analysis of the change which may be attributable to the CIMSA facility.
4. To develop key performance indicators (KPIs) for measuring pollution trends and environmental impact for the CIMSA facility.
5. To deliver a final report with findings, visual evidence, and mitigation recommendations.

3 | APPLICABLE E&S REQUIREMENTS

The Applicable Environmental & Social Requirements are as follows:

- The Project will meet national environmental, social, health and safety laws and regulations, including national obligations under international law that apply to the Project;
- The Project and associated E&S documentation will meet the following requirements:
 - EBRD E&S Policy (2024) and associated Environmental and Social Requirements (ESRs) in particular ESR3
 - Industrial Emissions Directive & Best Available Techniques: The existing operations of ÇİMSA in Mersin cement manufacturing plant as well as the Project fall under the Industrial Emission Directive (IED) as follows:
 - Annex-I, Section 3.1: Production of cement, lime and magnesium oxide (a) production of cement clinker in rotary kilns with a production capacity exceeding 500 tonnes per day or in other kilns with a production capacity exceeding 50 tonnes per day.
 - Annex-I, Section 5.2: Disposal or recovery of waste in waste incineration plants or in waste co-incineration plants (b) for hazardous waste with a capacity exceeding 10 tonnes per day.
 - Chapter II, Article 11 of the Industrial Emissions Directive (IED) outlines the general principles governing basic obligations of the operators, i.e., ÇİMSA.

Although ÇİMSA has undertaken several investments in the past and plans to undertake further dedusting actions in near future as part of an internal dedusting plan, the Company needs to undertake a comprehensive survey to map dust sources and impacted receptors and develop and implement a comprehensive Dust Management Plan, including dust source analyses with clear emission control and monitoring components, similar to the one being developed for Eskişehir cement manufacturing plant as part of the previous deal with the EBRD. The scope and purpose of the Dust Management Plan to be

developed and implemented in Mersin cement manufacturing plant will be similar in scope, and shall aim a comprehensive understanding of dust pollution sources and propose effective measures to mitigate environmental and social impacts, including the protection of the health safety of workers and surrounding communities. The Dust Management Plan needs to apply to the area of influence of Mersin cement manufacturing plant (i.e., will not only be applicable to dust sources and receptors within the Site borders but also will take into account the sources and receptors along the access roads leading to the mines as well as the sensitive receptors in the nearest settlements) should be structured to include at a minimum the following:

1. Emission Inventory on dust emissions which clearly specify the major contributors to dust pollution, supported with measurement results. The emission inventory should be based on the identification of all (including fugitive) dust emission sources through appropriate techniques with an aim to map all emission sources.
2. Process Analyses: In line with BAT screening, clear analysis on dust sources for each stage of production process and identification of where dust is generated. This will include examining equipment, machinery, material flows used and operating conditions as well as open storage areas of fuel and raw materials.
3. Identification of sensitive receptors impacted from Mersin cement manufacturing plant operations.
4. Operational Controls: Reviewing current operating procedures and protocols in line with the outcomes of dust source and receptor mapping and current operation and maintenance practices.
5. Training and Education: Training of employees on dust control measures and importance of proper handling and management of materials to minimize dust in line with revised operational guidelines.
6. Monitoring: The study results and responsive action plan shall be subject to review of the EBRD and needs to be supported with a sound and robust monitoring plan.

It should be noted that the Dust Management Plan needs to be implemented in parallel to the Stakeholder Engagement Plan and Community Health and Safety Management Plan particularly related to the collection and management of community complaints as related to dust emissions. In addition, Dust Management Plan should allow ÇİMSA to devise measures in accordance with the hierarchy of controls to reduce occupational dust exposure at the Site and quarries. Given the fact that ambient air quality monitoring practices are not always credible and technically capable to capture real exposure levels, advance techniques should be considered for the monitoring component of the Dust Management Plan. To this end, ÇİMSA, building on its experience in Eskişehir cement manufacturing plant, needs to implement the Dust Management Plan for Mersin cement manufacturing plant as well taking into account reliable techniques and tools available to enable continuous monitoring of fugitive dust emissions.

As a result, the required E&S action as part of E&S Action Plan for the Project Limestone is outlined below:

3.4	Implement a Dust Management Plan, to be applied for the area of influence of ÇİMSA operations in Mersin, taking into account the quarries, as well as the receptors along the access roads and within the nearby settlements. The Dust Management Plan needs to be based on sound methodologies for the development of a dust source inventory, maintenance, operational controls and ambient dust monitoring. The Dust Management Plan needs to be implemented in parallel with other relevant management plans (e.g., Stakeholder Engagement Plan, Community Health and Safety Management Plan). Complement the action with smart and robust dust monitoring systems established prior to the 5th CAC kiln and other investments becoming operational, in order to generate credible baseline data that will demonstrate the difference in ambient dust levels between the pre- and post-investment periods.	Ensures regulatory compliance and full compliance with EBRD ESR3	National legislation EBRD ESR3 Industrial Emissions Directive (2010/75/EU) BAT Conclusions for the Production of Cement, Lime and Magnesium Oxide	ÇİMSA to ensure implementation by all direct and contracted Project personnel. Adequate financial and human resources External specialists may be involved for training, supervision, inspection, audit, and consultation. External Consultant via EBRD Supported Technical Cooperation Fund.	Dust management plan developed within one year after loan agreement and implemented during the Project.	Dust management plan satisfactory to the EBRD. Dust management plan progress reports Air quality measurements and reports External grievances related to dust Ambient dust monitoring records Environmental baseline and historical dust assessment report Dust type emission analysis and source attribution model + ML model Environmental models (PM distribution forecasting) Custom dashboard interface and agentic AI assistant Trend reports with compliance alerts if parameters are approached (automated + manual validation)

4 | METHODOLOGY

The mass flow rate limit values of dust emissions and other emission sources in Mersin cement manufacturing plant were calculated as part of the air emissions verification report according to the provisions of the Industrial Air Pollution Control. The mass flow rate of dust parameter originating from off-stack sources (with controlled coefficients), and the NO₂ mass flow rate from the stacks exceeded the limit values. For this reason, an air quality dispersion modelling study was carried out by the accredited laboratory as part of the air emissions verification study to evaluate the distribution of settled dust, PM₁₀ and NO₂ emissions in the area of influence (AoI) of Mersin cement manufacturing plant with the aim to determine the onsite measurement locations by first determining the air pollution contribution values for these pollutants.

The air quality dispersion model was constructed using the AERMOD programme approved by the U.S. Environmental Protection Agency. In order to use the modelling programme, source characteristics (source name; source emission amount, actual stack height, stack diameter, flue gas outlet velocity, flue gas temperature), meteorological and topographic data were used as main inputs together with the meteorological data (hourly wind direction and frequencies, hourly wind speeds, hourly average temperatures, daily average mixing height and stability class values). In addition, to understand the effect of the structures around Mersin cement manufacturing plant on the distribution, building heights around the Site were also entered into the model (in addition to the topography of the wider area). According to the air emissions verification report, the prevailing wind directions as extracted from meteorological data were selected as North and South. As can be seen from Figure 2, dust and NO₂ displayed opposite dispersion patterns.

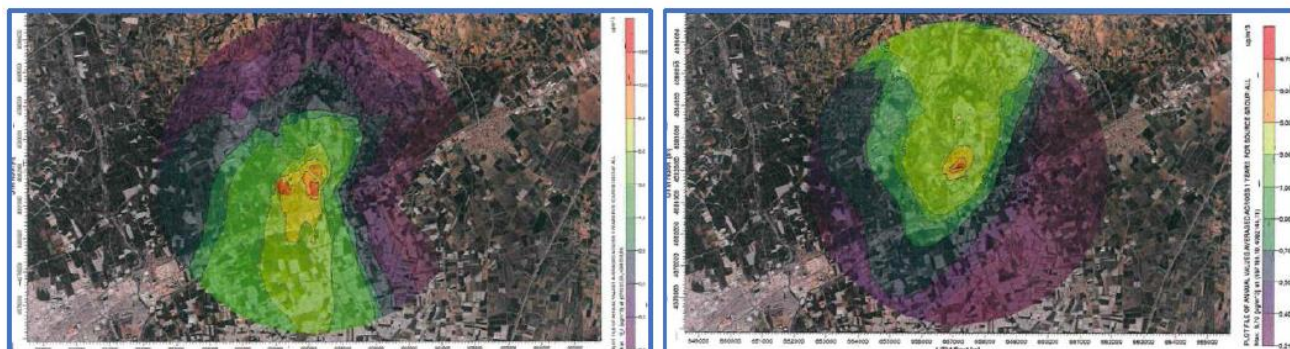


Figure 2: Dispersion Model Outputs for PM₁₀ and NO₂ – annual average distribution

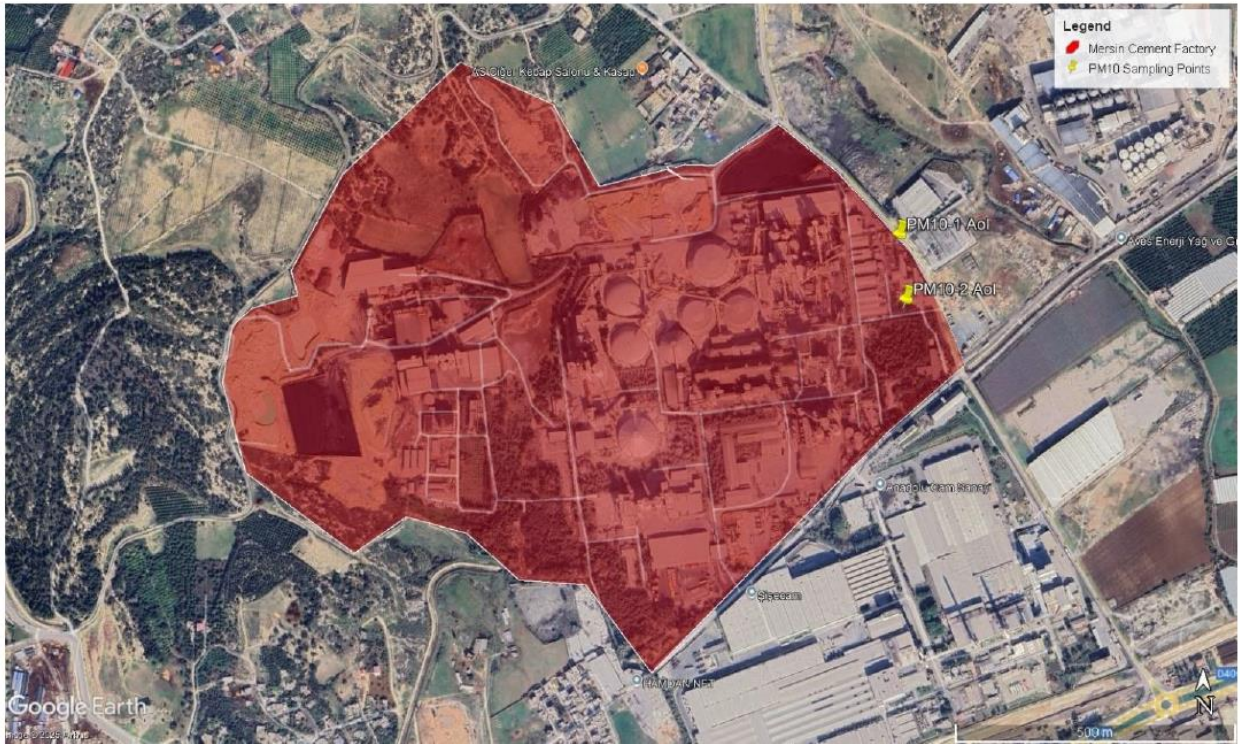


Figure 3: PM₁₀ Sampling Locations

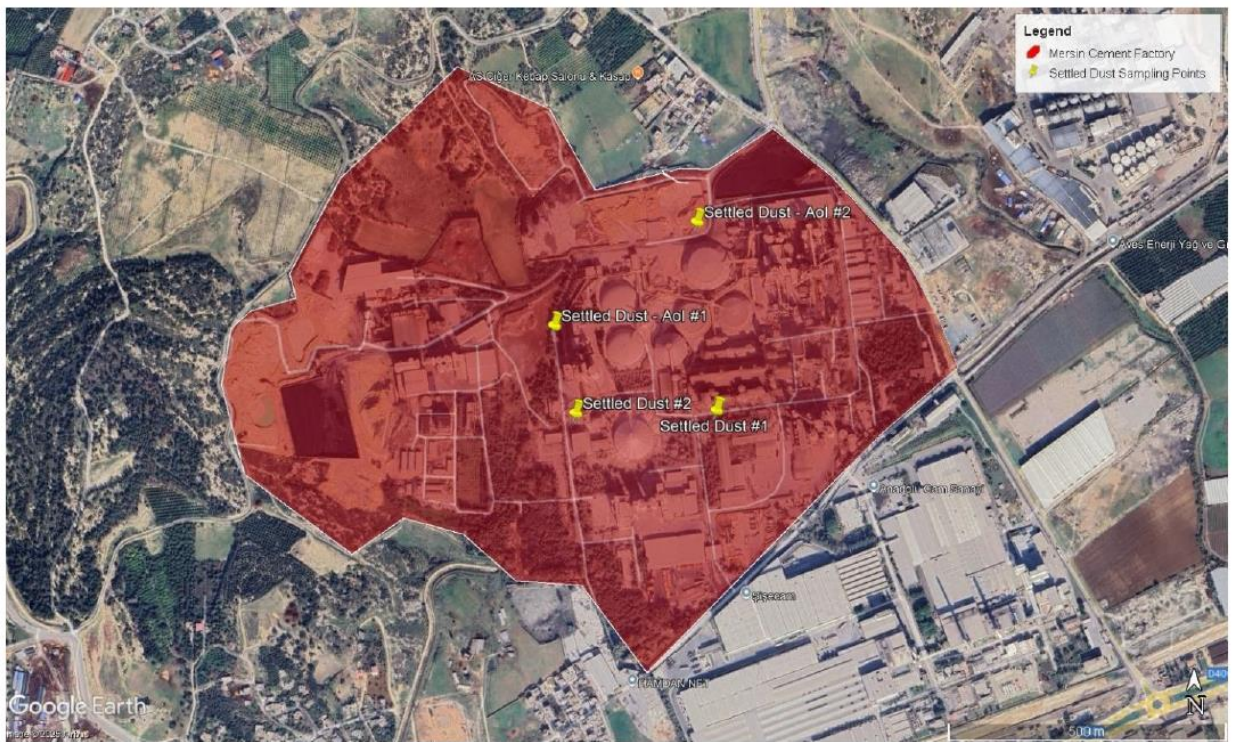


Figure 4: Settled Dust (dust deposition) Sampling Locations

Source	Thermal Power (MWt)	Fuel Type Based on Source
Rotary Kiln-1	145	Coal Petroleum Coke (Pet Coke) Natural Gas
Rotary Kiln-2	77	
Rotary Kiln-3	100	
CAC Vertical Kiln-1	5.1	Coal
CAC Vertical Kiln-2	5.1	
CAC Vertical Kiln-3	5.1	

Table 1. Information on process combustion systems in Mersin cement manufacturing plant

Source	CO	NO _x	SO ₂	Dust	TOC
Rotary Kiln-1	498.3	639.1	61.0	16.7	15.9
Rotary Kiln-2	203.1	553.6	0	23.5	5.1
Rotary Kiln-3	427.0	596.8	46.6	12.2	2.7
TR ELV (1)	-	800	300	50	150
TR ELV (2)	-	800	50	30	10
EU ELV (1)	-	500/800 (as NO _x)	50	30	10
BAT AEL	-	< 200-450	< 50-400	< 10-20	-

Table 2. Air emission measurement results in mg/Nm³ (air emissions verification measurement report, 20.10.2023)

Measurement and Monitoring Methodology

Understanding and accurately quantifying air pollution and dust emissions requires a multi-faceted approach that combines multiple remote sensing and data analysis techniques. No single method can provide a complete picture, as different technologies excel at capturing different aspects of atmospheric pollution. By integrating satellite-based optical sensors, infrared imaging, LIDAR, microwave, radar, and spectrometry, this project ensures a comprehensive and cross-validated assessment of CIMSA's environmental impact. Each of these methodologies offers unique advantages:

- Optical & infrared sensors detect airborne particulates and temperature variations linked to dust emissions.
- LIDAR and radar provide high-resolution, 3D mapping of dust plumes and pollution dispersion patterns.
- Microwave and spectrometry techniques measure gas concentrations and deep atmospheric particulate content, crucial for identifying pollutants beyond visible detection.

By synthesising data from these sources, we can establish accurate baseline conditions, track changes over time, and validate compliance with regulatory standards. This hybrid approach minimises uncertainty, improves data accuracy, and enhances our ability to identify trends and anomalies that could otherwise go undetected with a single measurement method. This project will utilise a multi-tiered approach, combining from the multiple data sources listed below (as determined by need and availability) and methodologies:

Remote Sensing and Satellite Analysis

Optical & Infrared Sensors (Measuring Aerosols & Dust):

- Visible & Near-Infrared (NIR) Imaging – Detects suspended dust and haze in the atmosphere by analysing how light scatters off particles.
- Thermal Infrared (TIR) Sensors – Measures the temperature of dust clouds and pollution plumes, useful for tracking heat emissions and wildfire smoke. Example: NASA’s MODIS (Moderate Resolution Imaging Spectroradiometer) on the Terra and Aqua satellites detects dust storms, wildfire smoke, and haze over large regions.

LIDAR:

- LIDAR uses laser pulses to measure dust and pollution layers at different altitudes.
- Example: NASA’s CALIPSO satellite (Cloud-Aerosol Lidar and Infrared Pathfinder Satellite Observations) provides 3D maps of atmospheric dust and pollution layers.

Microwave & Radar (Deep Atmospheric Sensing):

- Detects water vapor and aerosol concentrations even through cloud cover.
- Used to measure sulfur dioxide (SO₂) from volcanic eruptions and industrial pollutants.

Spectrometry & Gas Detection (Measuring Specific Pollutants):

- UV & Visible Spectrometry – Detects gases like ozone (O₃), nitrogen dioxide (NO₂), sulfur dioxide (SO₂), and carbon monoxide (CO). Example: ESA’s Sentinel-5P satellite (TROPOMI instrument) provides global air quality monitoring by tracking gas pollutants in real time.

Atmospheric and Meteorological Data Integration

- Correlation of satellite-derived pollution data with publicly available weather patterns and wind speed to track dispersion.
- Use of government and (where necessary), third-party air quality datasets for validation.

AI and Data Science Techniques

- Machine learning models for detection of pollution sources and trends
- Image processing algorithms to quantify dust plumes and industrial emissions
- Predictive analytics to estimate long-term environmental impact

5 | SCOPE OF WORK

The Consultant will carry out the following tasks:

5.1 | TASK 1: DESKTOP REVIEW & DATA COLLECTION

- Review existing environmental reports, permits, and monitoring data (including stack and ambient air emissions).
- Evaluate previous dispersion modelling studies, if any.
- Collect and review ÇİMSA’s internal dust source inventory (if available).
- Identify gaps in current dust management practices.
- Review applicable regulations:
 - Türkiye’s Regulation on Industrial Emissions

- EU Industrial Emissions Directive (IED)
- EU Directive 2024/2881 on Ambient Air Quality

5.2 | TASK 2: DUST SOURCE MAPPING AND RECEPTOR IDENTIFICATION

- Identify all potential dust sources across the Mersin facility and associated access roads and quarries (point, area, and fugitive sources).
- Categorize dust types (raw material, clinker process, cement grinding and packaging).
- Map sensitive receptors in the area of influence (e.g., nearby settlements, agricultural areas, schools, etc.).
- Assess current operational controls and dedusting systems in place.
- Propose potential improvements or upgrades.

CIMSA will contribute to the assignment by providing the followings:

- Access to the Mersin facility and quarries.
- All available emission data and reports.
- Operational logs and site layout maps.
- Records of community complaints related to dust.
- Access to relevant environmental and operational personnel.

5.3 | TASK 3: SITE VISIT

- Conduct an on-site assessment to verify dust sources and receptors.
- Interview key personnel (environmental, operational, health & safety teams).
- Observe and document material handling practices, storage conditions, and visible dust emissions.
- Identify potential issues not evident in desktop review (e.g., road dust, wind-blown dust from storage areas).

5.4 | TASK 4: INITIAL SCREENING

- Analyse historical ambient air quality data (satellite + on-site) to define baseline PM10 and PM2.5 levels.
- Establish baseline levels for key dust indicators, with emphasis on PM10 exceedances.
- Develop initial Key Performance Indicators (KPIs) for future monitoring.
- Provide recommendations for detailed dispersion modelling and continuous monitoring systems.

5.5 | TASK 5: MODELLING AND MONITORING STRATEGY DEVELOPMENT

- Develop a dispersion model to simulate dust emissions and their spread under various operational and meteorological conditions.

- Use satellite-based remote sensing and AI analytics to detect fugitive dust emission patterns over time.
- Integrate historical satellite data to establish pre-operational air quality trends.
- Recommend advanced monitoring technologies (e.g., LIDAR, spectroscopy, optical sensors) for real-time and long-term data collection.
- Define the structure of an integrated monitoring system to cover both on-site and off-site (access roads, nearby settlements) dust impacts.
- Align all proposed strategies with EBRD ESR3 and BAT-AEL requirements.

5.6 | TASK 6: FINAL DUST MANAGEMENT PLAN AND REPORTING

- Prepare a comprehensive Dust Management Plan (DMP) including:
 - Emission inventory (with source-specific measurements or estimates)
 - Process-specific dust generation and control methods
 - Sensitive receptor analysis
 - Operational improvements and control hierarchy
 - Worker protection measures and training needs
 - Monitoring strategy and KPIs
 - Complaint and grievance management system
- Prepare and submit a Final Report including:
 - Visual maps, baseline analysis, receptor impact evaluation
 - Modelling outputs and monitoring recommendations
 - Timeline for implementation and verification
 - Recommendations for aligning ÇİMSA operations with 2030 EU ambient air quality targets and WHO AQGs

6 | IMPLEMENTATION ARRANGEMENTS

The E&S Advisor will report on all aspects of the Assignment to the Lenders and liaise with the Company.

The Company will provide the E&S Advisor with access to, or copies of all, relevant information. The Company will provide logistical support for the site visit including vehicles. The E&S Advisor will make provision for international travel, accommodation, airport transfers and subsistence costs.

7 | DELIVERABLES

The Consultant will deliver the following reports and documents electronically and in English:

1. Baseline Environmental Report: Historical satellite imagery analysis before facility operation.
2. Timeline report: A timeline-based of satellite imagery analysis from the baseline to present day, showing relevant changes attributable to CIMSA (if any).
3. Periodic Monitoring Reports: Monthly/quarterly assessments of pollution trends.
4. Development of models to estimate particulate size distribution based on atmospheric data and meteorological conditions including visual representations of dust dispersion patterns displaying PM10 and PM2.5 distributions specifically.
5. Final Environmental Impact Report: Incorporate findings from the detailed dust type analysis into the environmental impact reports. Specific sections will detail the dispersion, concentration, and mitigation strategies for each type of dust identified, supporting more

targeted environmental management practices.

6. Custom Dashboard User Interface: Interactive platform for ongoing monitoring.

*Note: The EBRD is responsible for sharing in their sole discretion any of the deliverables

The nature of the comments will determine the time allowed to finalise each report or document but generally this will be two weeks. Final documents should be submitted via email in PDF format.

8 | PARALLEL CONTRIBUTIONS BY CIMSA

The following contributions will be provided by CIMSA under the joint agreement to complement this assignment.

Overall Arrangements

- Provide close support to the project and assign a focal point to ensure smooth communication with the EBRD Project Team and the Consultant.
- Offer necessary assistance during the Consultant and EBRD's visit to the facility, including:
 - Access to the Mersin facility and quarries
 - All available emission data and reports
 - Operational logs and site layout maps
 - Records of community complaints related to dust
 - Access to relevant environmental and operational personnel

Specific Contributions by Task

Task 1: Desktop Review & Data Collection

- Provide readily available reports on air quality measurements, including those obtained during assignments with 2nd or 3rd Party Agency results including those conducted at in-situ by Airqoon or other credible agencies, to establish pre-operational air quality trends.

Task 2: Dust Source Mapping and Receptor Identification

- Deliver test results on chemical and physical properties of 5 different particulates, including those from the CAC (Calcium Aluminium Cement) plant.

Task 3: Modelling and Monitoring Strategy Development

- Contribute to real-time and long-term data monitoring which will be initiated as part of the

Consultancy assignment by supporting the supply, assembly, and deployment of remote sensors, and ensuring their protection.

9 | PROPOSAL AND CONTRACTING REQUIREMENTS

Consultant's technical proposal shall include:

- A general statement of capabilities (3 pages), outlining the following:
 - Experience in environmental monitoring
 - Experience on similar assignments
 - Experience in-data science and AI integration
- the proposed team, with CVs (2 pages maximum per individual) and respective levels of efforts of all relevant experts presented in tabular form in person-days (both in the field and elsewhere) for each phase of the services (see **Annex 1**);
- Consultant's methodology and approach to the Assignment (5 pages maximum); and,
- a timeframe presenting the Assignment milestones in graphical form.

Please note the maximum number of pages described above.

Consultant's team:

The Consultant's team shall possess the following competencies to:

1. Technical Expertise

- Proven experience in **dust emission monitoring**, including fugitive and stack emissions, particularly in cement or heavy industrial sectors.
- Proficiency in **remote sensing technologies**, including satellite-based optical, infrared, LIDAR, and spectrometry systems.
- Demonstrated capability in **air quality dispersion modelling**.
- Familiarity with **EU and national environmental regulations**, including Directive 2024/2881 and Türkiye's Industrial Emissions Regulation.

2. Data Science and AI Integration

- Competence in applying **machine learning and predictive analytics** to environmental datasets.
- Experience in developing **custom dashboards** and visualisation tools for pollution tracking and reporting.

3. Field Implementation

- Capacity to conduct **on-site assessments**, including interviews with operational and H&S teams, and documentation of dust sources and receptors.

- Ability to coordinate with local stakeholders for fieldwork in Mersin and associated quarry sites.

4. Communication and Reporting

- Strong technical writing skills for producing **baseline reports, monitoring outputs, and final impact assessments**.
- Ability to deliver findings in **English**, with clarity and precision suitable for disclosure and lender review.

Languages:

The reports will be provided in English. The Client will be responsible for translating the documents into national language as necessary.

ANNEX 1
BREAKDOWN OF COSTS (EXCLUSIVE OF VAT)

DIRECT EXPENSES

1. Fees (Remuneration):

Name of Experts	Job Titles	Working Period	In the Field	In Home Office	Total Period	Expert Rate	Total
Total Fees							

2. Per Diem Allowance:

Place	Number	Rate Period	Per Diem	Total
Total Per Diem				

REIMBURSABLE EXPENSES

(may include indirect taxes, such as VAT which are not otherwise recoverable by the E&S Advisor)

3. Air Travel:

Routing	Air Fare	No. of Flights	Total
Total Air Travel			

4. Local Travel: (Travel from home to departure airport & return, and reasonable local travel abroad)

Journey	Cost	No. of Journeys	Total
Total Local Travel			

5. Miscellaneous

Item	Description	Number	Total
Visas			
Interpretation and Translation			

Reports			
Communications			
Equipment Purchase			
Accommodation for long term experts (not listed in Per Diem)			
Other Miscellaneous Expenses (to be specified)			
Total Miscellaneous			

6. Contingencies: (utilisation only after prior approval in writing by the Bank)

Item	Amount
Total Contingencies	

Total Financial Proposal	
---------------------------------	--