Export of Forwarding Path Delay in IPFIX

draft-tgraf-opsawg-ipfix-inband-telemetry-00

Enabling a statistical network delay view, giving insights
where delay is being accumulated in the forwarding path

thomas.graf@swisscom.com
benoit.claise@huawei.com
alex.huang-feng@insa-lyon.fr

16. July 2022

Inband Telemetry with IPFIX Flow-Aggregation

Aggregate and sample as early as possible – Chose your Cardinality

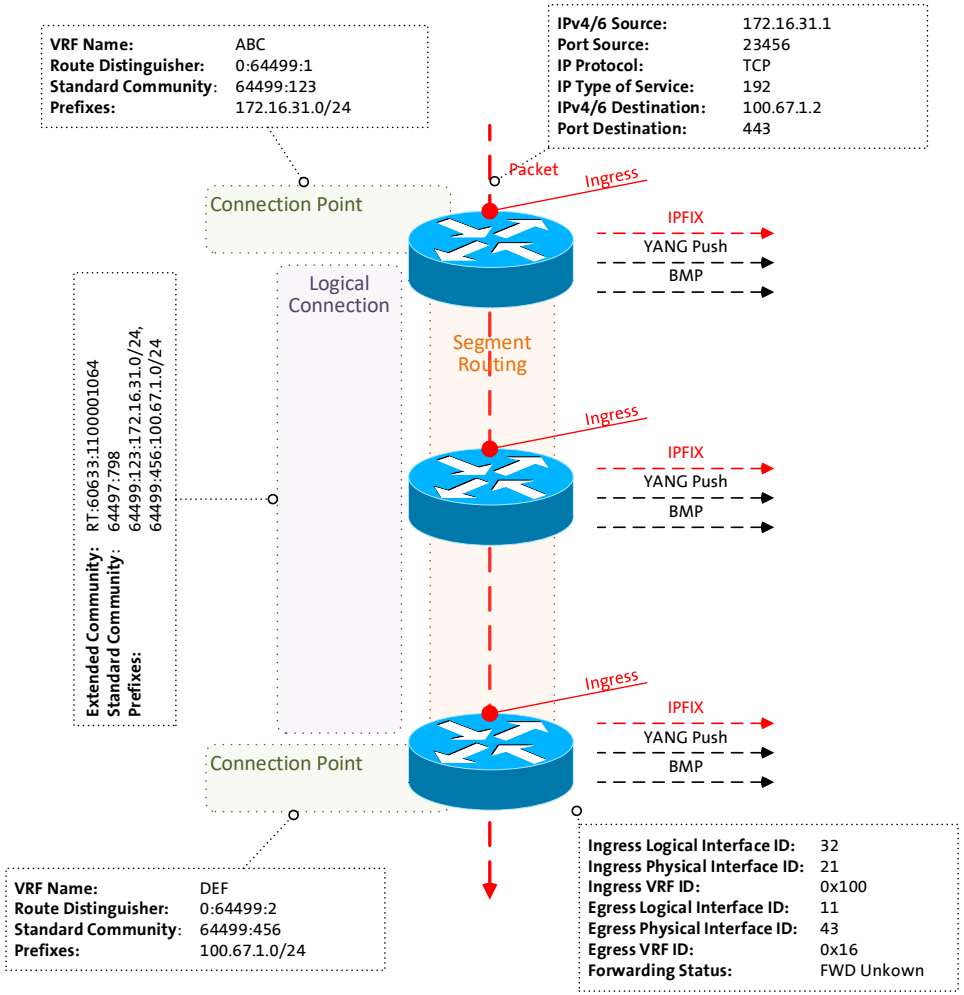

- IPFIX defines two key data engineering tools to reduce collected and exported amount of data. **Sampling and Aggregation.** Enabling **a statistical view from the network usage.** Also called **connectivity matrix.**
- IPFIX **measures packets and bytes** and give **device and control-plane context**.
- **With Inband Telemetry**, iOAM, Path Tracing and iFIT, **delay can be measured** actively (probing) or passively. Metrics are exposed on every node, postcards or only at the last node (passport).
- **IPFIX lacks the ability to export delay.** A key element for monitoring Customer Service Level Agreements.
- **Inband Telemetry lacks Flow Aggregation support** as defined in RFC 7015. Therefore, **scalability** in terms of data export and collection is **drastically limited** today.
- draft-tgraf-opsawg-ipfix-inband-telemetry enables IPFIX to export delay while preserving the ability to aggregate and also **adds the Inband Telemetry path delay metric definition** in the performance registry for proper delay definition.

Measure delay and give network context

Enabling a statistical network delay view

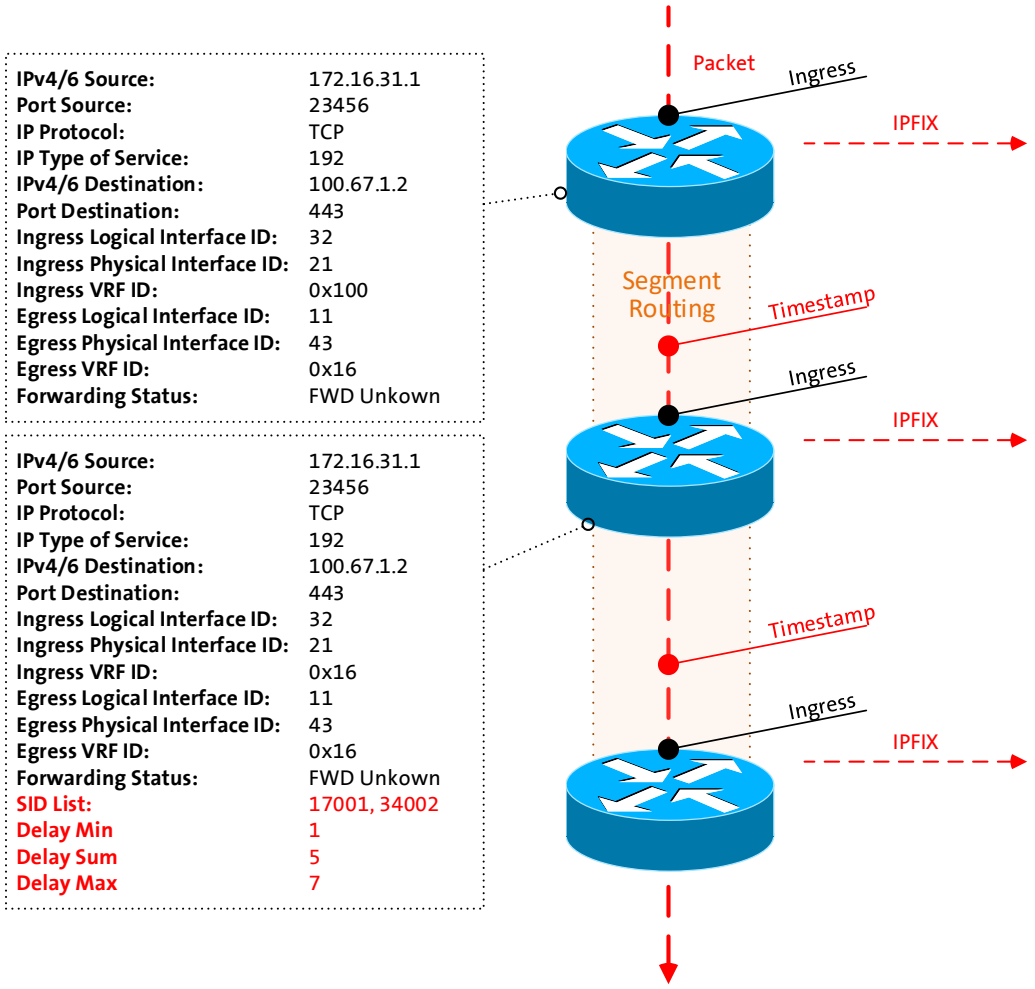

- Packets are captured ingress with an optional sampler, data-plane dimensions extracted, enriched with device and control-plane dimensions and **added with a unique flow ID to a flow cache on the node for aggregation.**
- The data-plane dimensions answers **which packet**. The control-plane **which service**. The device dimensions **where in the network**.
- In case of Inband Telemetry, **a timestamp and optionally a direct export tag is added** to the packet header when entering the Inband Telemetry domain.
- Each subsequent packet for the same flow increases byte and packet count. Each new flow creates a new flow ID in the flow cache.
- In case of Inband Telemetry, At each node in transit (postcard) or only at the last node (passport), **the delay is calculated by comparing the timestamp in the packet and when packet is received** on the node**. Delay is populated into the flow cache besides packet and byte count.**

Performance Registry

Defining new entries

- **4 new IP One-Way Delay Hybrid Type I Passive Registry Entries.**
  - **Minimum Delay** – Describing the lowest delay of all accounted packets for a given flow id.
  - **Maximum Delay** – Describing the highest delay of all accounted packets for a given flow id.
  - **Sum of the Delay** – Describing the summed delay of all accounted packets for a given flow id.
  - **Mean Delay** – Describing the average delay of all accounted packets for a given flow id. Applicable only on data collection.

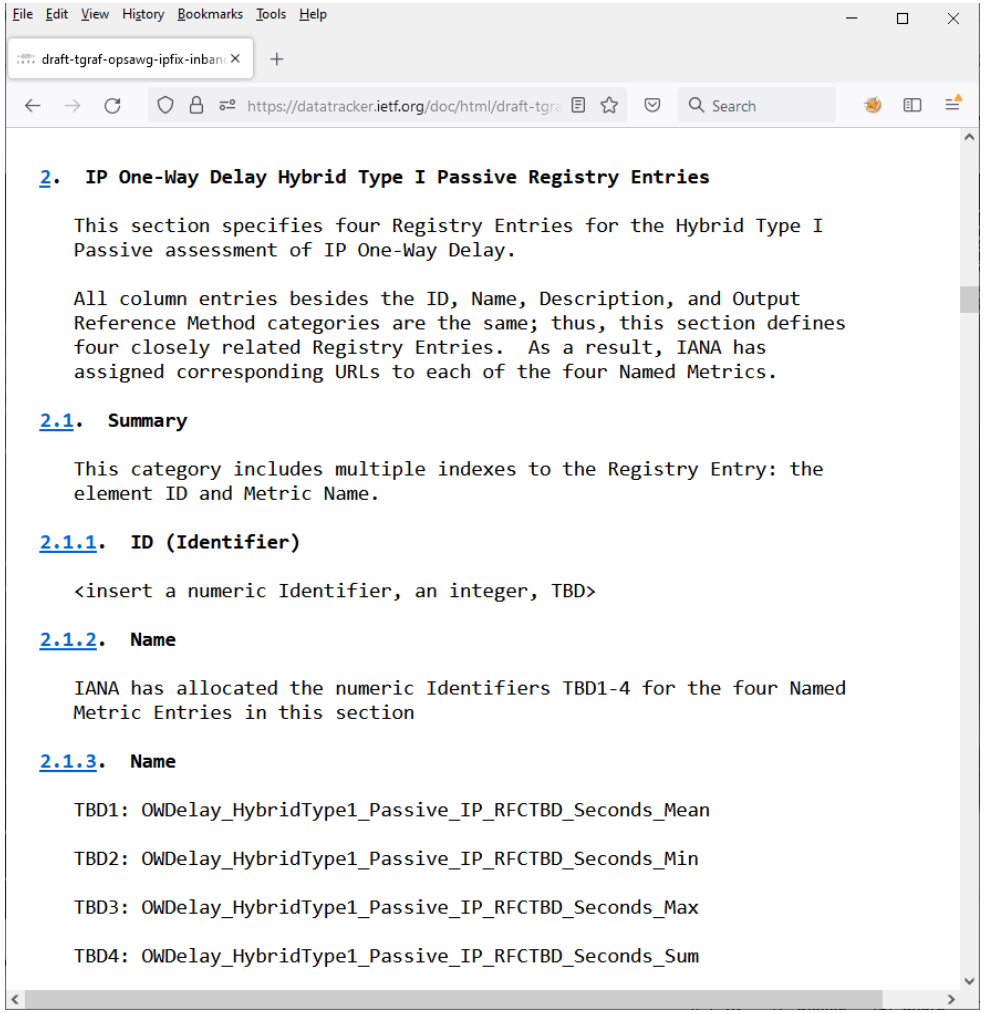

IPFIX Registry

Defining new entries

- **8 new Path Delay Registry Entries.**
  - **Minimum Delay** – Describing the lowest delay of all accounted packets for a given flow id in **micro or in nanoseconds**.
  - **Maximum Delay** – Describing the highest delay of all accounted packets for a given flow id in **micro or in nanoseconds**.
  - **Sum of the Delay** – Describing the summed delay of all accounted packets for a given flow id in **micro or in nanoseconds**.
  - **Mean Delay** – Describing the average delay of all accounted packets for a given flow id in **micro or in nanoseconds**. Applicable only on data collection.

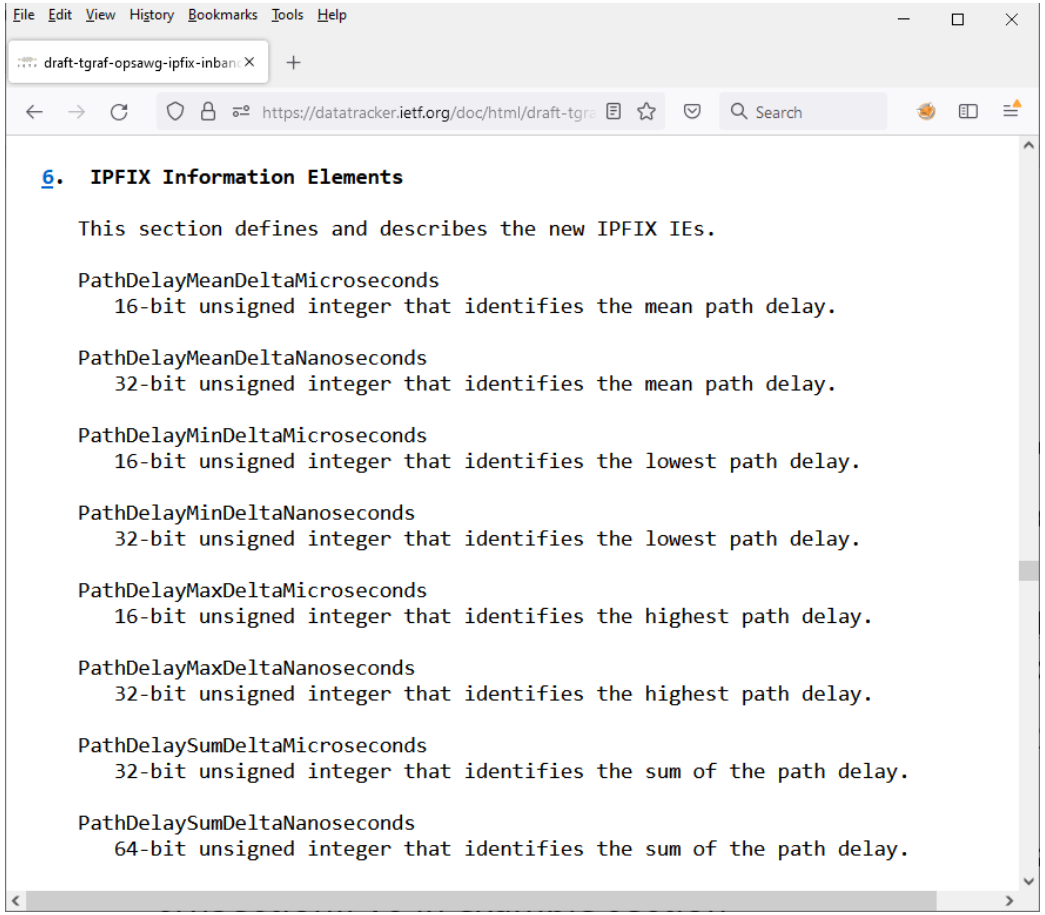

Export of Forwarding Path Delay in IPFIX

Draft Status and Next Steps

- **Do you recognize the problem statement?**
- Network operators want to understand
  - **where delay with which network and device dimensions** is being accumulated
  - at highest scale **for a statistical network delay view**.
- IEs in document defined are independent from how the delay is being metered.
- Two vendors are validating on technical feasibility. Others showing interest.
- INSA Lyon working on running open-source code in FD.io VPP. **Will be shown at IETF 115 hackathon.**
- Draft version -01 will contain data record and template examples.
- **-> Requesting review and collecting comments in OPSAWG and IPPM working groups.**

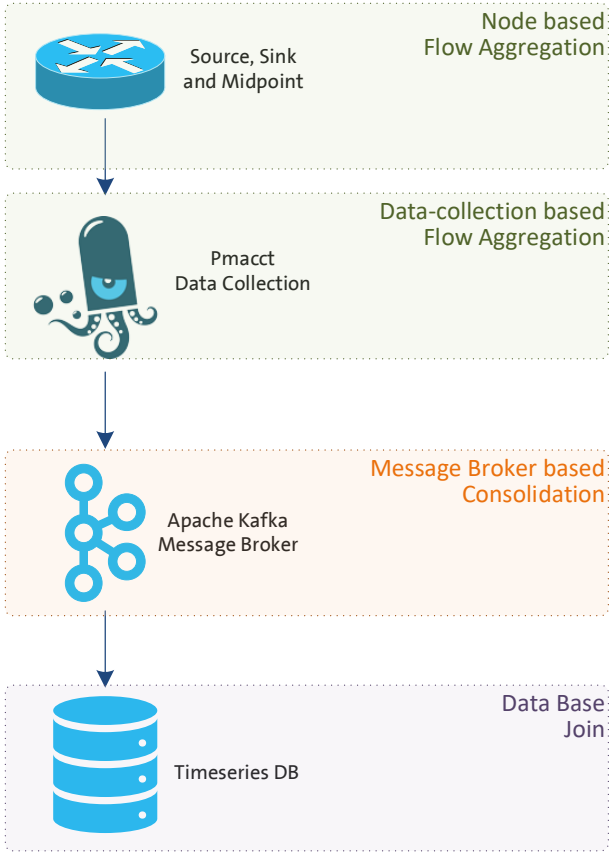

thomas.graf@swisscom.com
benoit.claise@huawei.com
alex.huang-feng@insa-lyon.fr

16. July 2022