

# **ELEC0447 – Analysis of electric power and energy systems**

Course organization and introduction

Bertrand Cornélusse  
[bertrand.cornelusse@uliege.be](mailto:bertrand.cornelusse@uliege.be)



# Welcome to ELEC0447

## Objectives of this lecture

- A few words about the organization
- Show the overall structure of an electric power system
- Highlight a few important features of power system operation
- Illustrate those on the Belgian and European systems
- Present some orders of magnitude it is important to have in mind
- Introduce some terminology

Adapted from ELEC0014 introduction by Thierry Van Cutsem

# Agenda

1. Course organization
2. Components and structure of an electrical power and energy system
3. Energy outlook for Belgium
4. Insight on renewable and dispersed generation
5. The power balance problem
6. From DC to AC, large interconnections and the come-back of DC

# **1. Course organization**

# Course organization

- Theory lectures (maximum 2 hours)
- Practice sessions (remainder of the session) → bring your laptop
- Project 1:
  - Model a simple distribution system in PandaPower and make some simple analyses.
  - Oral presentation
- Project 2:
  - Analyze a system using power flow analyzes (power flow solver provided)
  - Oral presentation
- Oral exam in January
  - Theory (list of questions available) and one exercise

## The teaching team

- Bertrand Cornélusse: main contact
- Geoffrey Bailly: exercise sessions + project 1
- Antonin Colot: last 2 lectures + project 2

# References

Main reference book:

- Mohan, Ned. Electric power systems: a first course. John Wiley & Sons, 2012.

Other references:

- Course notes of ELEC0014 by Pr. Thierry Van Cutsem. (In french)
- Weedy, Birron Mathew, et al. Electric power systems. John Wiley & Sons, 2012.

## **2. Components and structure of an electrical power and energy system**

## A large scale system

In modern society, electricity has become a “commodity”:


“Commodity: marketable good or service whose instances are treated by the market as equivalent with no regard to who produced them”

But “Behind the power outlet” there is a complex industrial process!

Electric energy systems are the largest systems ever built by man:

<https://openinframap.org/>

# Thousands of km of overhead lines and underground cables, of transformers

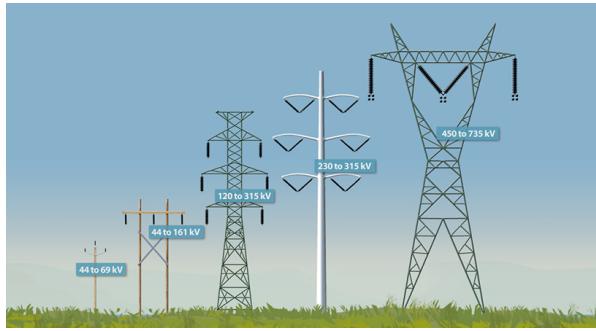

Source:

<https://www.hydroquebec.com/safety/transmission-lines/understanding-transmission-lines.html>



Source:

<https://www.bbntimes.com/society/common-reasons-for-use-power-transformers-in-residential-areas>

## Tens/hundreds of power plants + a myriad of distributed energy sources




Source: Wikipedia



Source:


<https://www.greentechmedia.com/articles/read/another-major-oil-company-invests-in-clean-energy1>

## Devices to (dis)connect elements: substations, circuit breakers, isolators

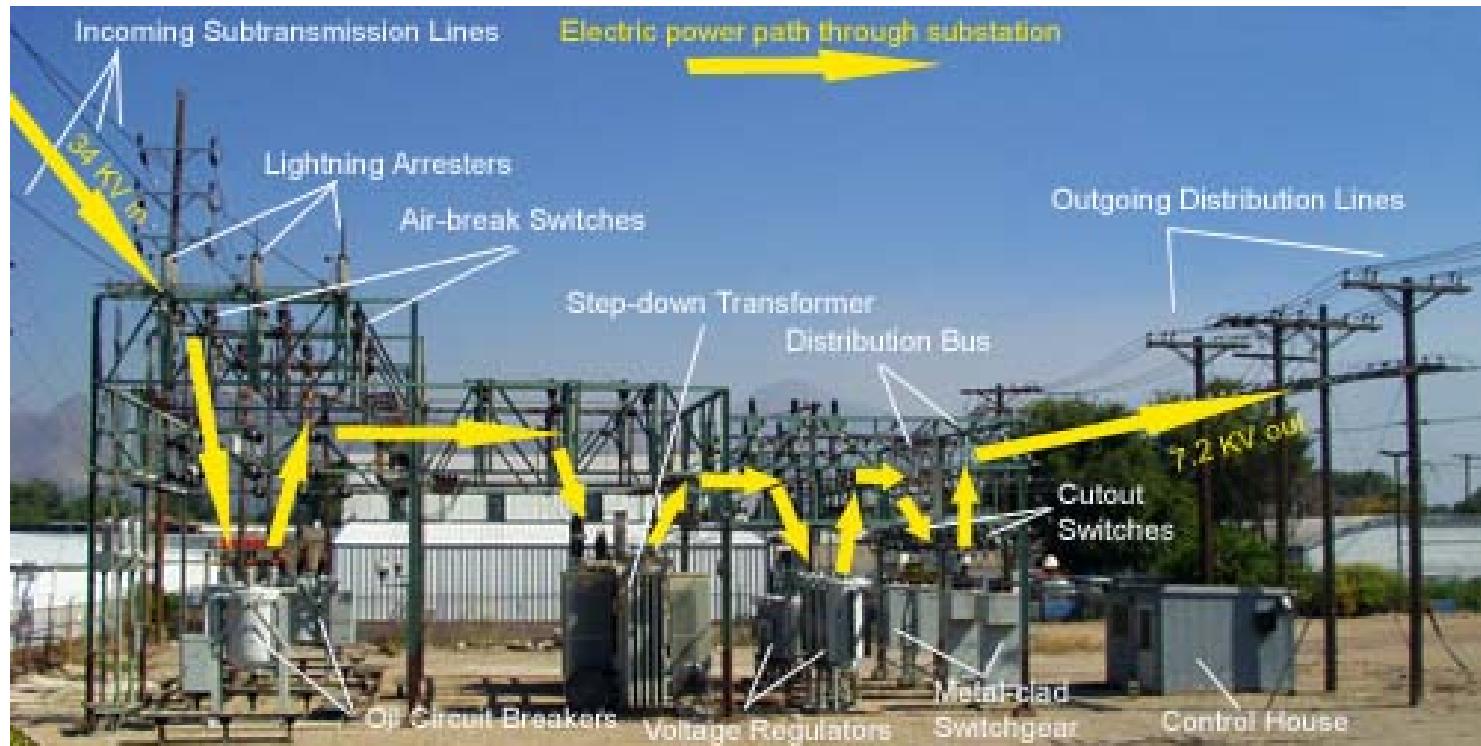

Source: <https://www.osha.gov/etools/electric-power/illustrated-glossary/sub-station>

## Protection systems: to eliminate faults

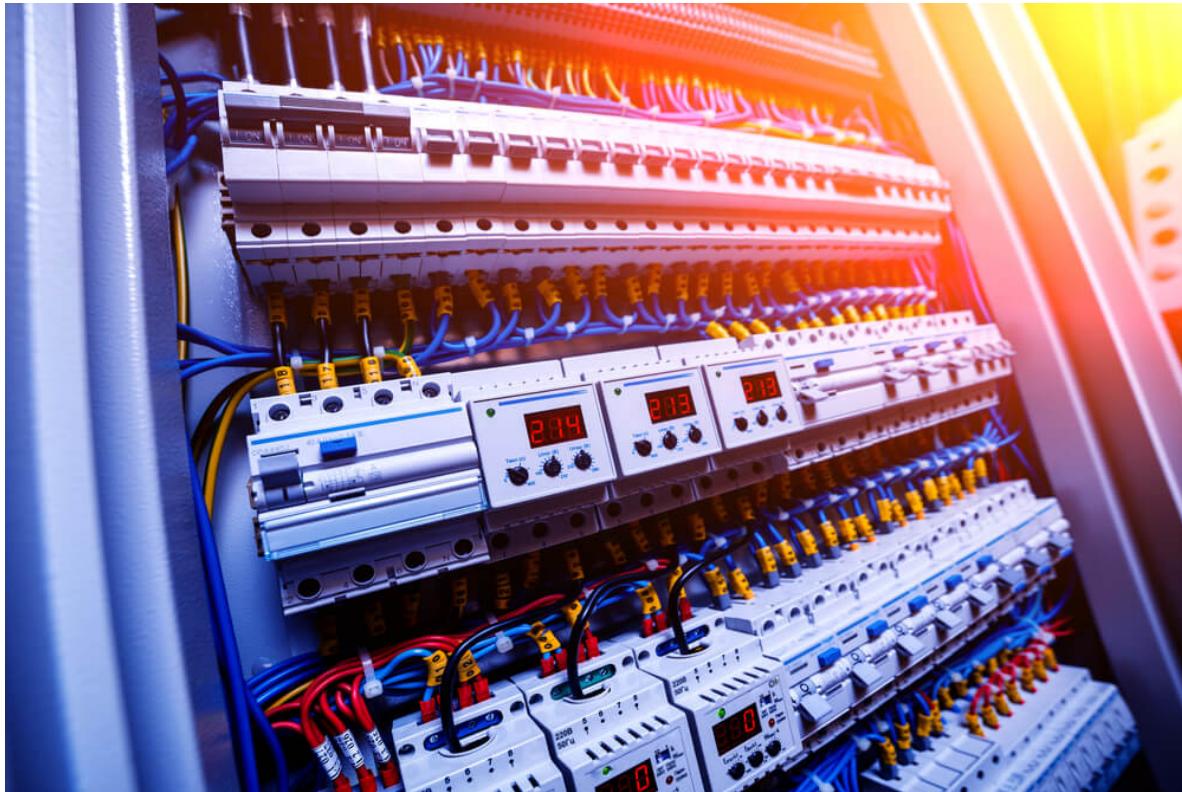

Source: <https://www.exa-ecs.com/courant-fort-quels-sont-les-composants-d'une-armoire-electrique/>

**Real-time measurements : active and reactive power flows, voltage magnitudes, current magnitudes, energy meters, phasor measurement units**



Source: <https://new.siemens.com/global/en/products/energy/energy-automation-and-smart-grid/protection-relays-and-control/general-protection/phasor-measurement-unit-pmu.html>

**Controllers: distributed (e.g. in power plant) or centralized (control center)**



Source: [https://eliagrid-int.com/egi\\_projects/elia-national-control-centre-support/](https://eliagrid-int.com/egi_projects/elia-national-control-centre-support/)

**Unlike most other complex systems built by man, power systems are exposed to external “aggressions” (rain, wind, ice, storm, lightning, etc.)**



## Low-probability but high-cost failures

In spite of those disturbances, modern electric power systems are very reliable.  
Assume a duration of power supply interruption of 0.5 hour / year

$$\text{availability} = (8760 - 0.5) / 8760 = \textcolor{red}{99.994 \%}$$


However, the cost of unserved energy is high

- average cost used by CREG (Belgian regulator) to estimate the impact of forced load curtailment: 8.3 k€/MWh (source: Bureau fédéral du plan)
- varies with time of the day : between 6 and 9 k€/MWh
- varies with type of consumer : 2.3 k€/MWh for domestic, much higher for industrial
- even higher average cost considered elsewhere (e.g. 26 k€/MWh in France !)

Large-scale failures (blackouts) have tremendous societal consequences

- next two slides: examples of blackouts and their impacts


# USA-Canada blackout, August 2003

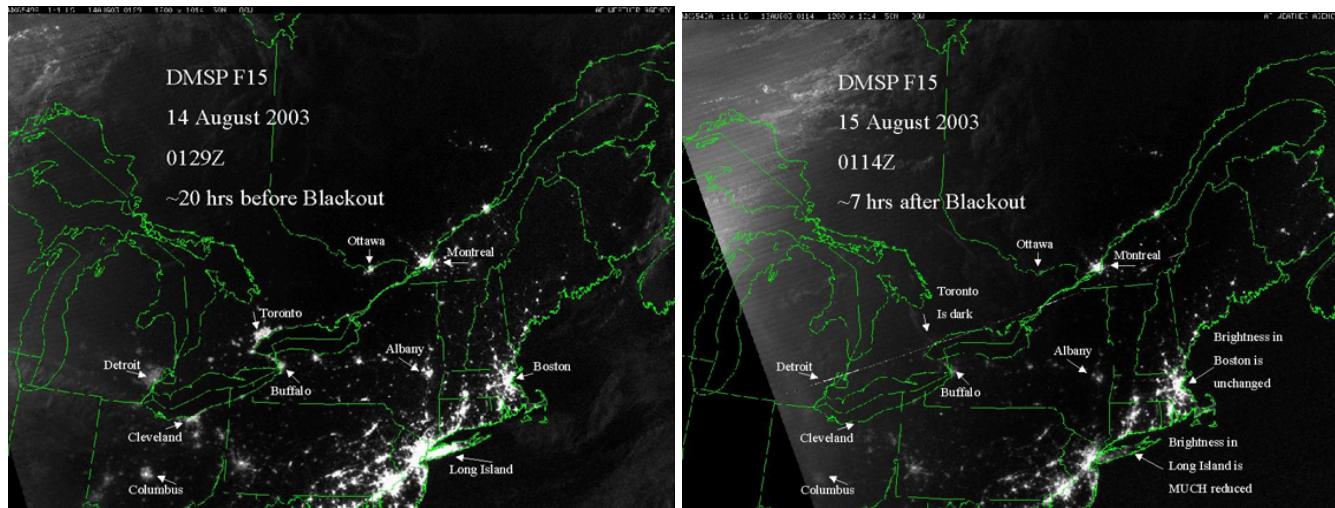

- 50 million people disconnected initially
- 61 800 MW of load cut in USA & Canada
- cost in USA : 4 to 10 billion US \$
- in Canada : 18.9 million working hours lost
- 265 power plants shut down
- restoration : from a few hours to 4 days


# Italian blackout, September 2003

- Cascade tripping of interconnection lines → separation of Italy from rest of UCTE system

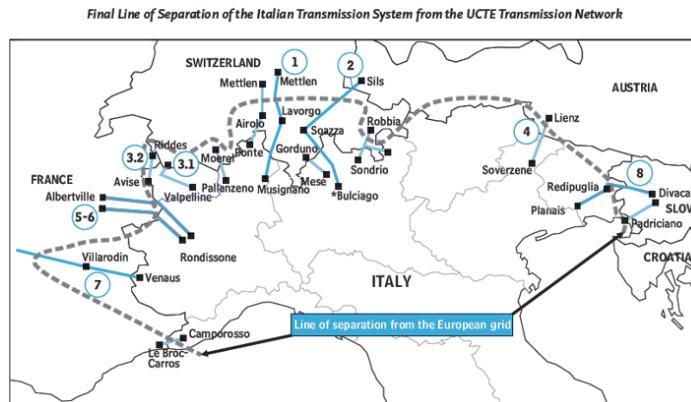


- Deficit of 6.7 GW imported in Italian system → frequency to collapse in Italy
- 340 power plants shut down, 55 million people disconnected initially - 27 GW lost (blackout occurred during night)
- Estimated cost of disruption ≈ 139 million US \$
- Restoration time: 15 hours

# Structure of electric network (case of Belgium)

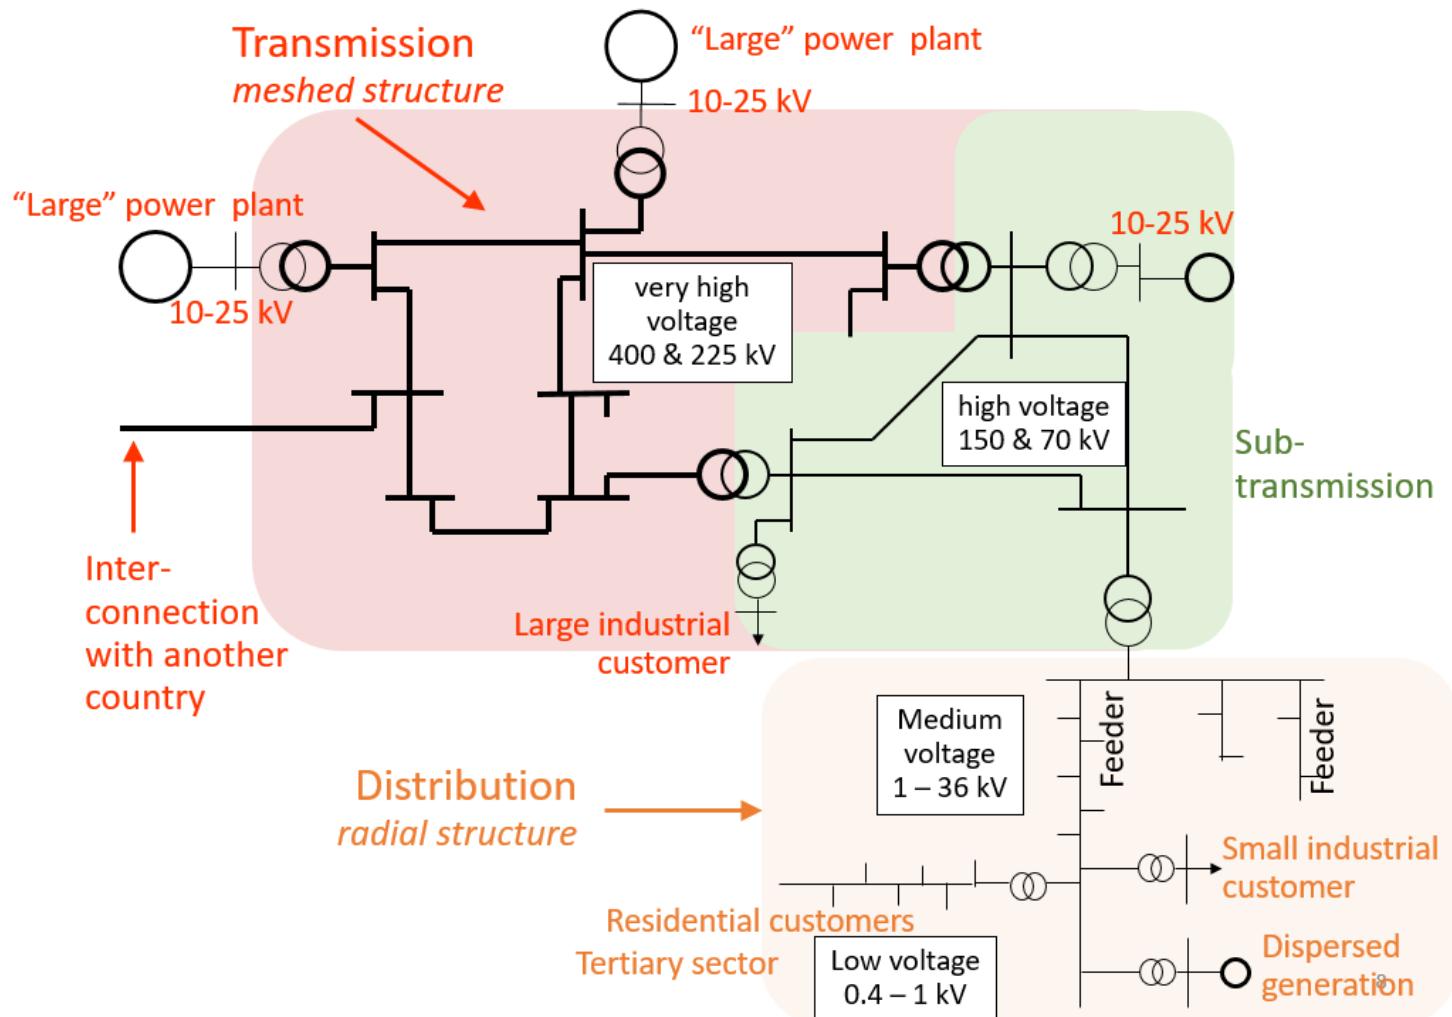

In Belgium there are 30 and 36 kV underground cable networks, in Brussels and Antwerp areas. These are meshed and play the role of sub-transmission.

## **400 (and 220 kV) grid in Belgium and interconnections**

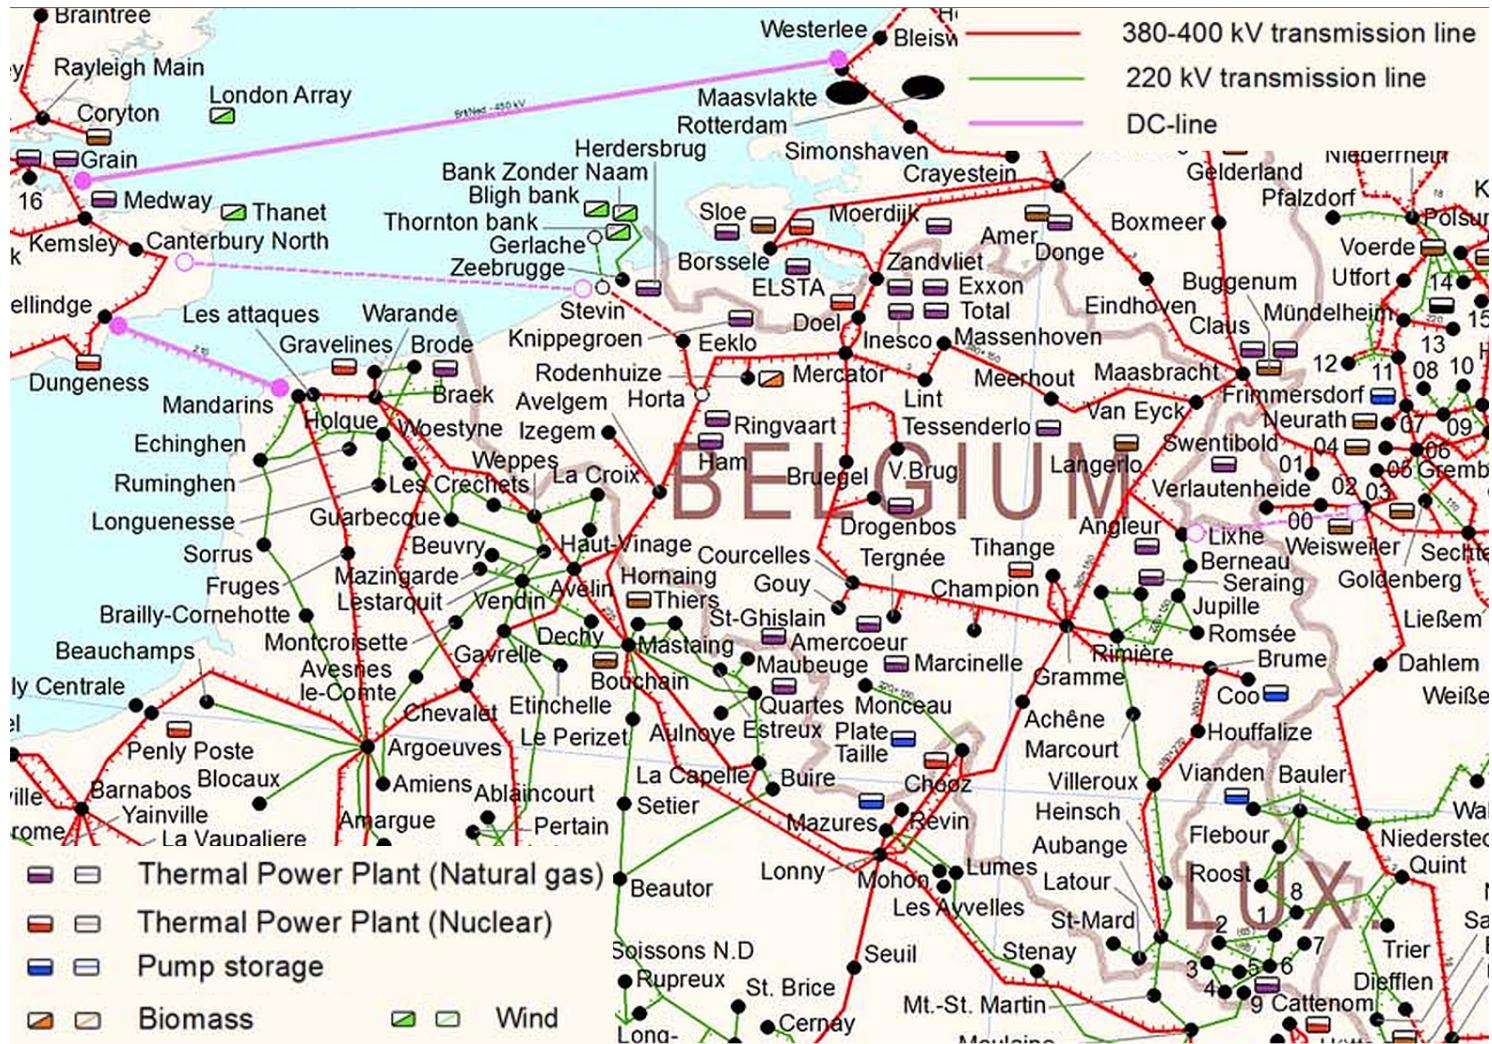

## Updated version here


# Flows on the belgian grid

## Carte

Reference date 14/09/2022

Time interval ← →

Reference date and time interval: 14/09/2022 09:45 AM

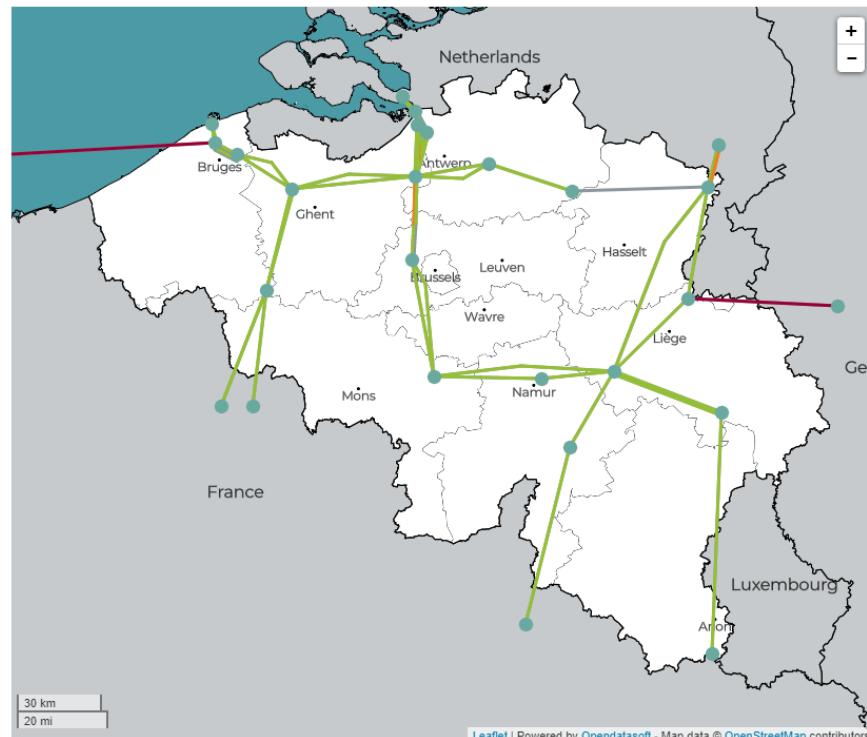

Consult the raw data [Physical flows on the Belgian high-voltage grid](#) ([Elia Open Data License](#))

See here

# Length of network by voltage level and type in Belgium


	Nominal voltage (kV)	Underground cables (km)	Overhead lines (km)	Total (km)
<b>Transmission and sub-transmission</b>				
Very High Voltage	400	49	919	968
	225	47	301	348
High Voltage	150	573	1 981	2 554
	70	301	2 404	2 705
	30 & 36	2 022	60	2 082
	<b>Total</b>	<b>2 990</b>	<b>5 665</b>	<b>8 657</b>
Medium Voltage	<b>Distribution (¹)</b>			
	$1 \leq < 30$	71 804	5 069	76 873
Low Voltage	< 1 (²)	80 480	47 360	127 840
	<b>Total</b>	<b>152 284</b>	<b>52 429</b>	<b>204 713</b>

(¹) 552 connection points between T & D


(²) does not include public lighting

**Total number of transformers : 74 990**

# Electrical energy balance over the year 2018 in Belgium

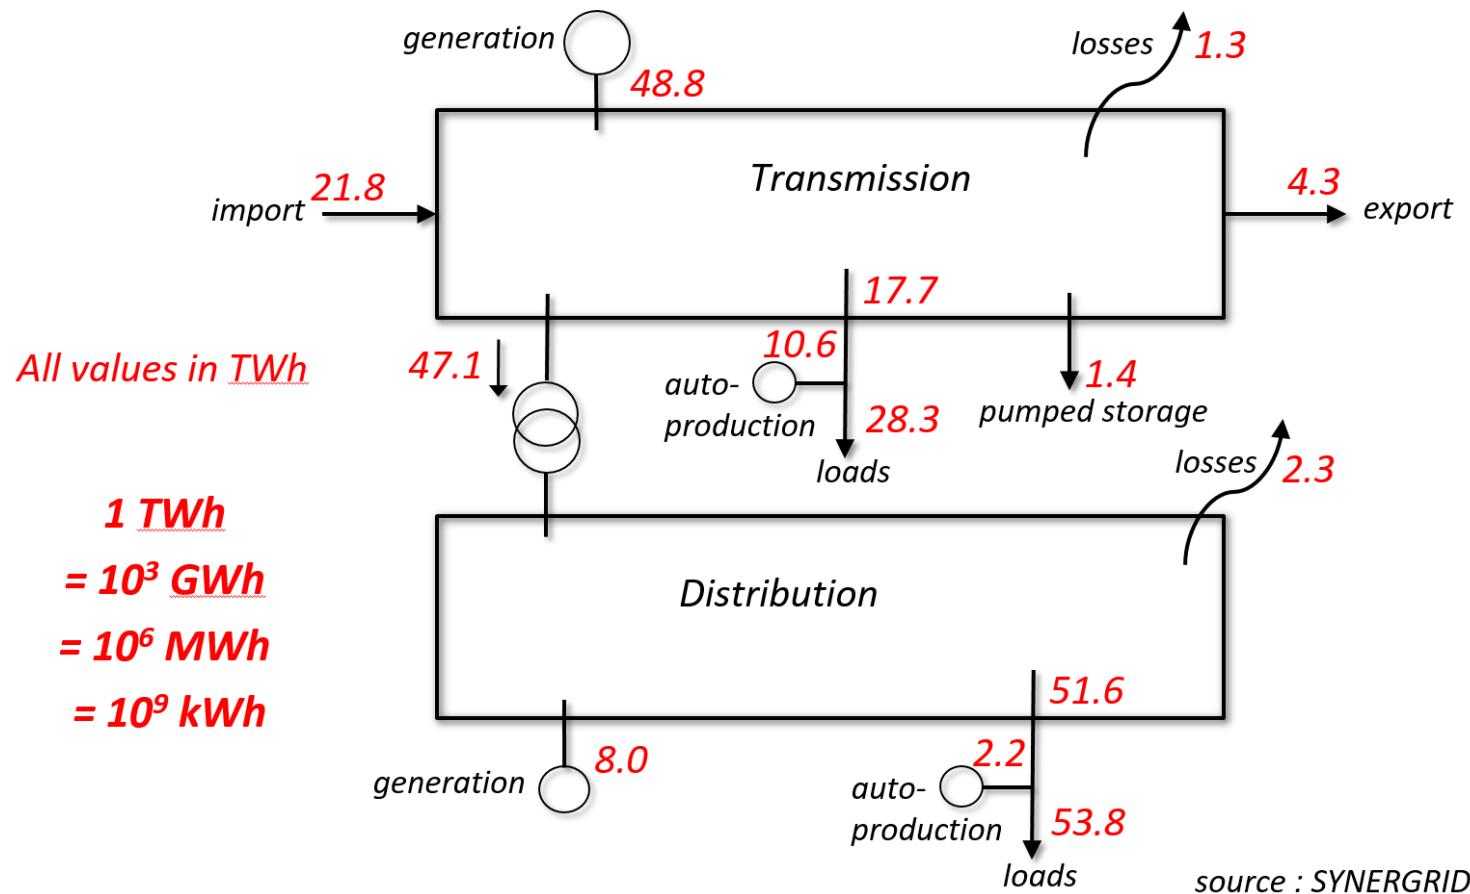

## Network losses

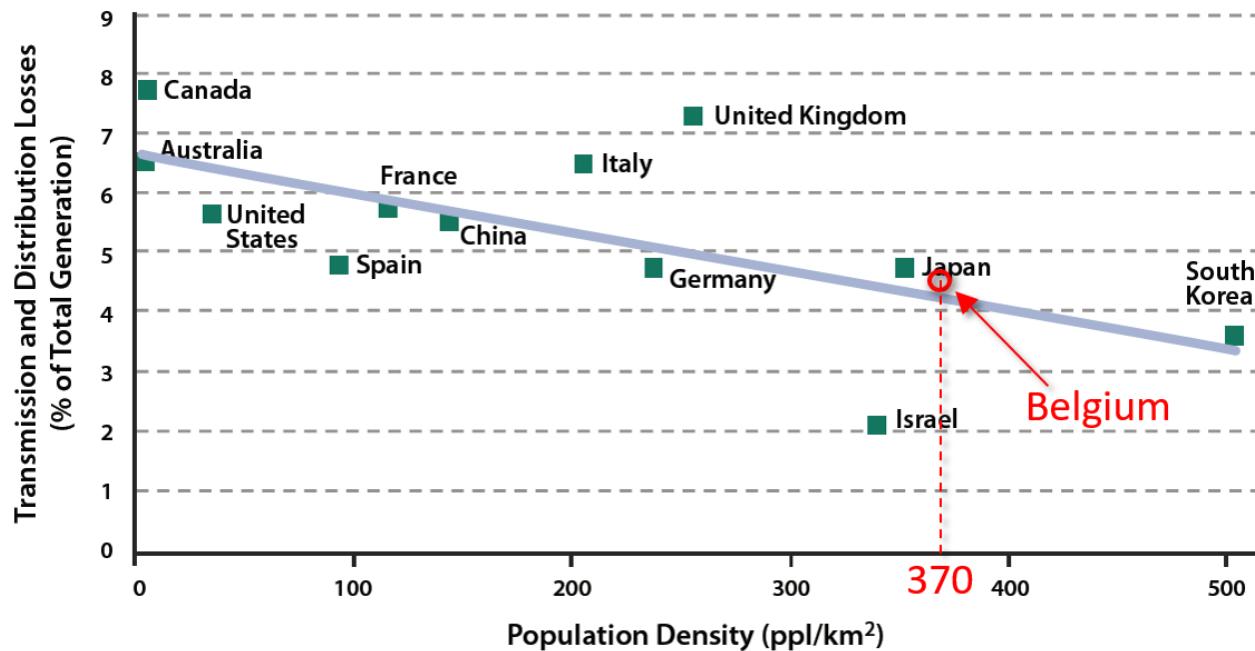


Source: World Bank Development Indicators, <http://data.worldbank.org/indicator>.

$$\frac{\text{Transmission \& Distribution losses}}{\text{Production injected in network} + \text{import}} = \frac{1.3 + 2.3}{48.8 + 21.8 + 8.0} = 4.6 \%$$

Transporting and distributing electrical energy is an industrial process with a relatively high efficiency



# Consumption outlook

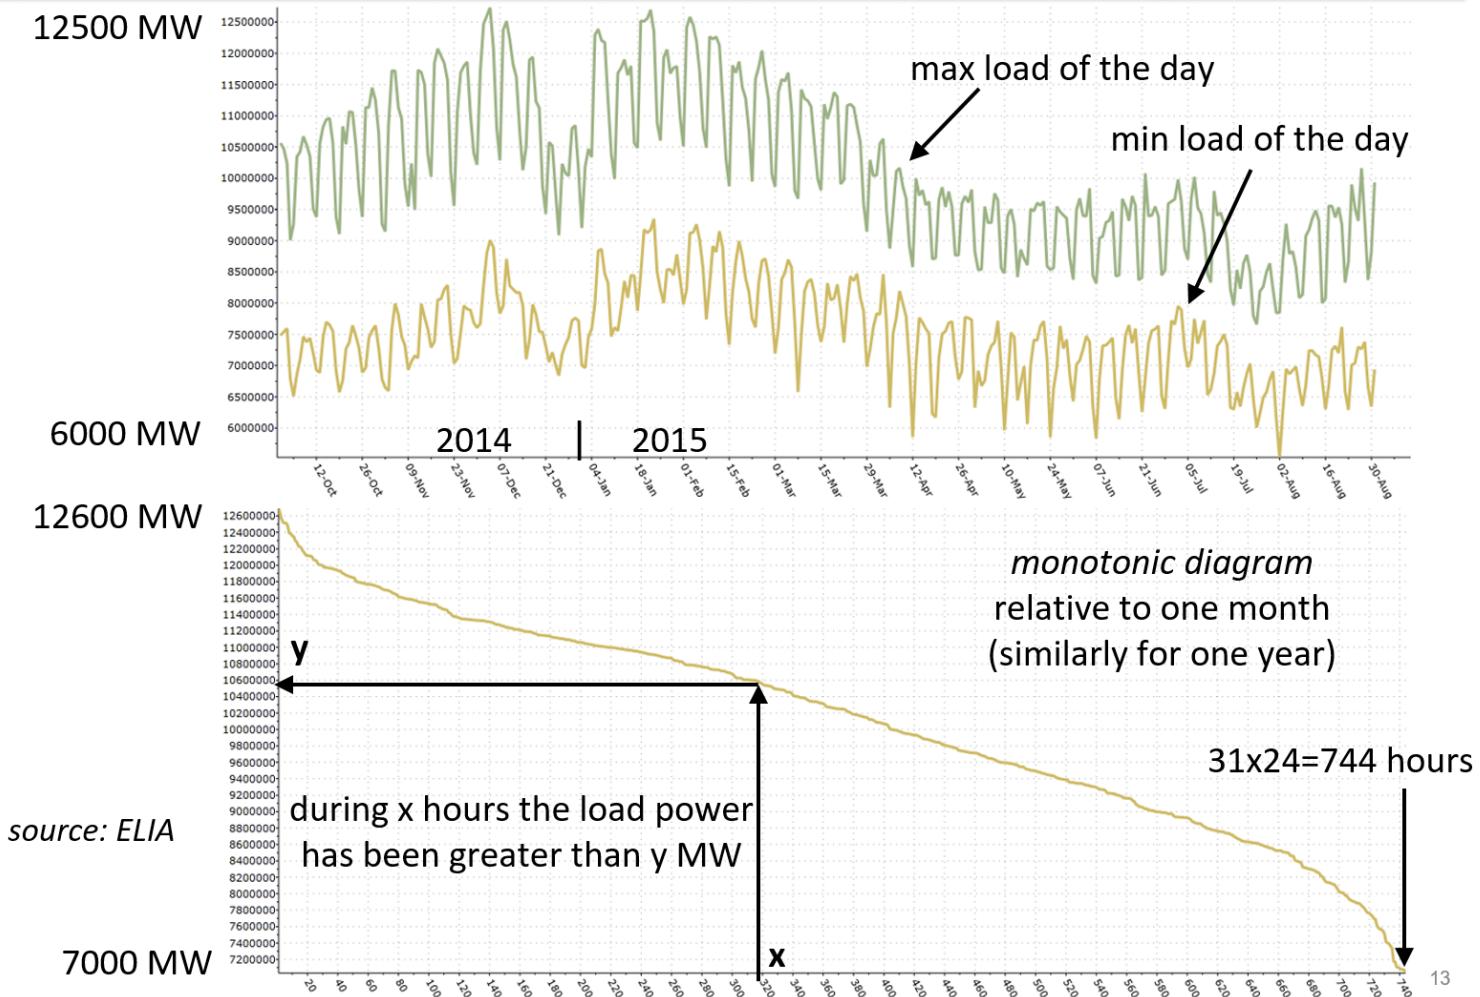

12600 MW

source: ELIA


7100 MW

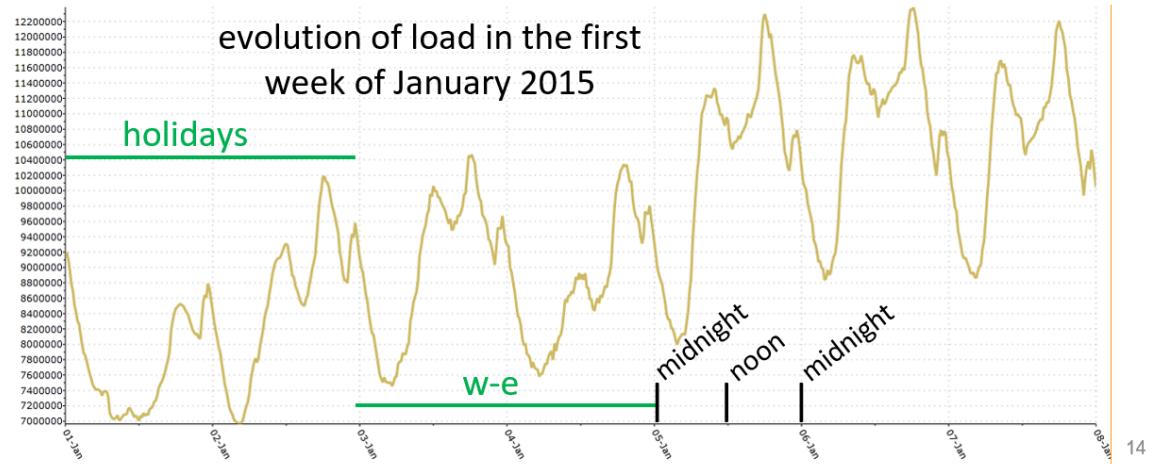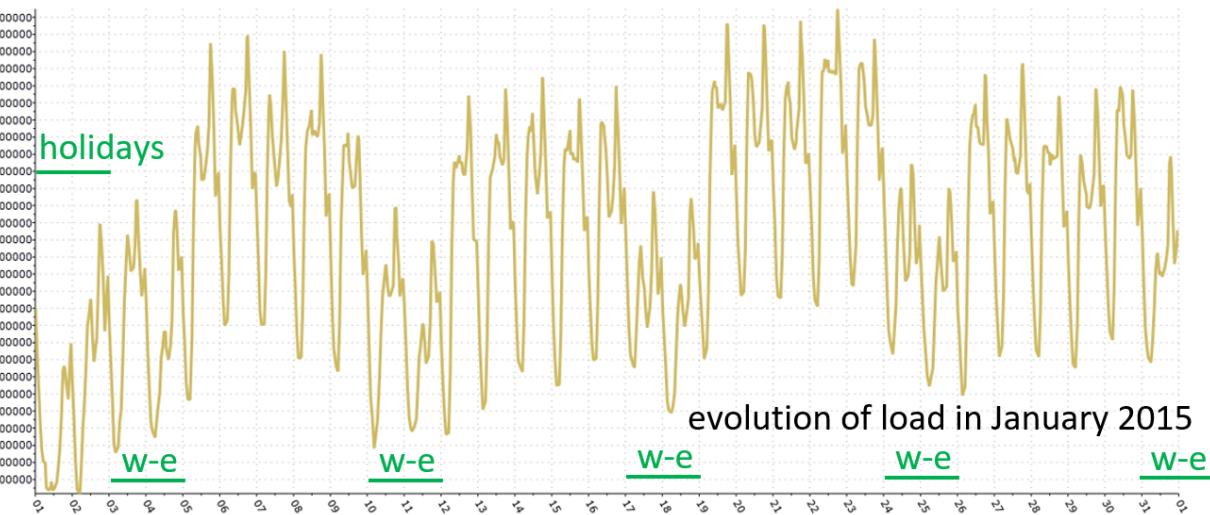

14

# Peak load on some grids

Monthly power in ENTSOe networks =  $\frac{\text{energy consumed in the month (GWh)}}{\text{nb days in the month} \times 24}$

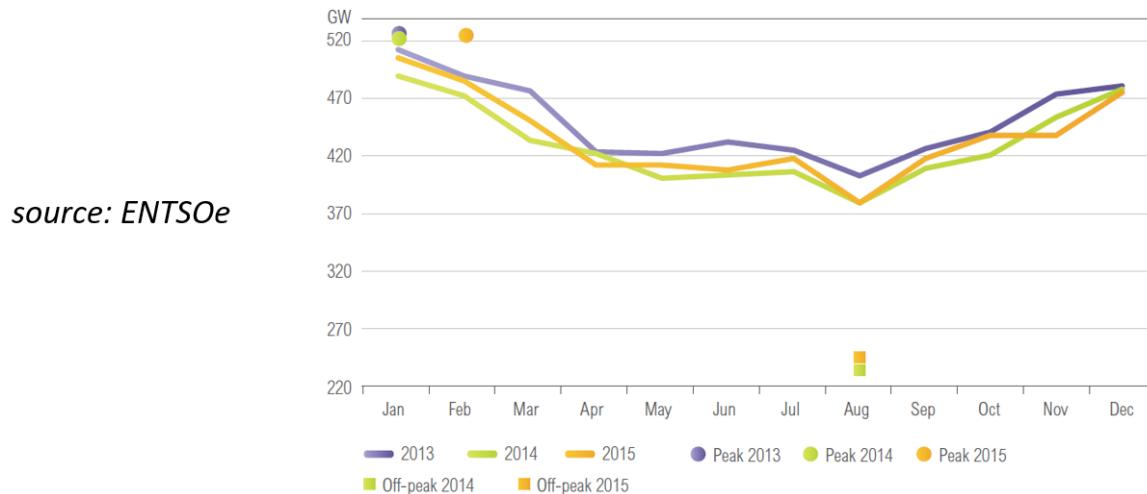

Peak loads recorded on the Belgian transmission system

Year	Date	Time	Day	Power (MW)
2010	Dec 14	18:00	Tue	14 390
2013	Jan 17	18:00	Tue	13 255
2014	Dec 4	18:00	Thu	12 736
2015	Jan 22	18:00	Thu	12 696
2016	Jan 19	18:00	Thu	12 679
2017	Jan 18	18:00	Thu	13 270
2018	Nov 19	18:00	Mon	13 453

source:  
ENTSOe

15

### **3. Energy outlook for Belgium**

# Sources of electrical energy in Belgium in 2018


Category	Energy source	Generation capacity Dec 2018		Energy produced in 2018		Capacity factor
		MW	% total	TWh	% total	
Nuclear	total	5 919	26.0	27.0	39.0	52
Non renewable non nuclear	gas			22.1		
	others			3.4		
	total	7 680	33.7	25.5	36.9	38
Hydro	pumping stations	1 308		1.0		9
	run-of-river	125		0.3		27
	total	1 433	6.3	1.3	1.9	
Renewable non hydro	wind	3 247		7.1		25
	solar (PV)	3 581		3.5		11
	biomass-biogas	811		3.5		49
	wastes			1.2		
	total	7 764	34.1	15.3	22.1	
TOTAL		22 796	100	69.1	100	

Exercise: let's update this table together.

## Comments

- “Nuclear generation capacity” involves all units, even those temporarily shut down for technical reasons, or waiting for the decision to extend their lifetime
- Gas power plants includes small CHP (Combined Heat Power) units
- Same for biomass plants
- Purposes of pumping storage :
  - pumping : convert electrical energy into mechanical (potential) energy when demand is low compared to available generation (e.g. during night)
  - turbining : reverse operation when demand is high (e.g. at day peak) → “peak shaving” and “valley filling” of daily load curve
  - efficiency of whole cycle  $\approx 85\%$
  - usually profitable since cost of electricity higher when demand is high
  - fast reserve : a hydro unit can be started (resp. pumping stopped) quickly to replace a generation unit that is taken out of service
  - allows keeping base units (e.g. nuclear) in operation when load is very low

**Coo - Trois-Ponts**

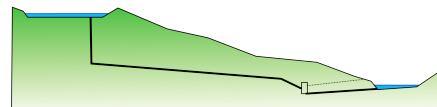

## Comments: capacity factor

- Capacity Factor: 
$$\frac{\text{energy produced in 1 year (MWh)}}{\text{generation capacity (MW)} \times 365 \times 24(h)}$$
  - usually close to 90 % for nuclear, but some Belgian units have high unavailability
  - note the low value for solar energy!

## Some trends in Belgium

- Early retirement of gas power plants not enough competitive on electricity market, too expensive to maintain
  - political decision to keep a “strategic reserve” !
  - Angleur
- Biomass plant of "Les Awirs" just decommissioned.
- Natural hydro resources saturated in Belgium
  - there are plans to expand the pumping storage
  - Coo power plant : currently  $(3 \times 158 + 3 \times 230 =)$  1164 MW installed capacity
- Wind energy :
  - public opposition to new on-shore wind farms (densely populated country !)
  - NIMBY attitude : Not In My BackYard


## Some trends in Belgium (...)

- off-shore wind farms have a higher capacity factor than on-shore ones: wind is more steady in the sea
- Belgian off-shore wind farms in 2018 :
  - 5 wind parks with an installed capacity of 1186 MW have produced 3,408 TWh
  - Capacity Factor =  $(3,408 \times 10^6) / (1186 \times 365 \times 24) = 32\%$
- still a great potential for new off-shore wind farms :
  - 3 under construction (+ 1076 MW) → 8 TWh production expected in 2020

## 4. Renewable generation

# From large centralized to small dispersed power plants

Denmark : a country with huge penetration of renewable energy sources

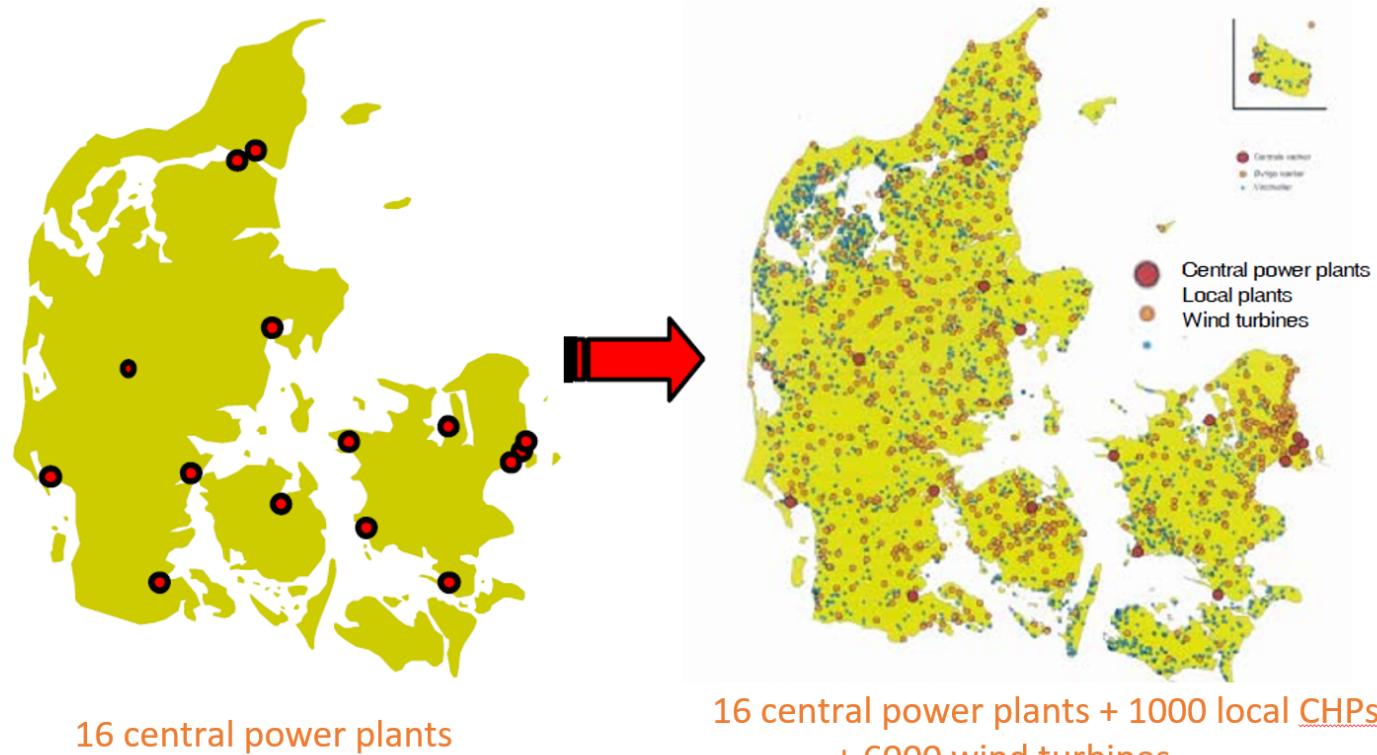


Evolution of Danish power system over the period 1980-2005

(Z. Xu, M. Gordon, M. Lind, J. Østergaard, "Towards a Danish Power System with 50% Wind - Smart Grids Activities in Denmark", IEEEXplore, 2009 )


# Wind generation potential

<https://globalwindatlas.info/>

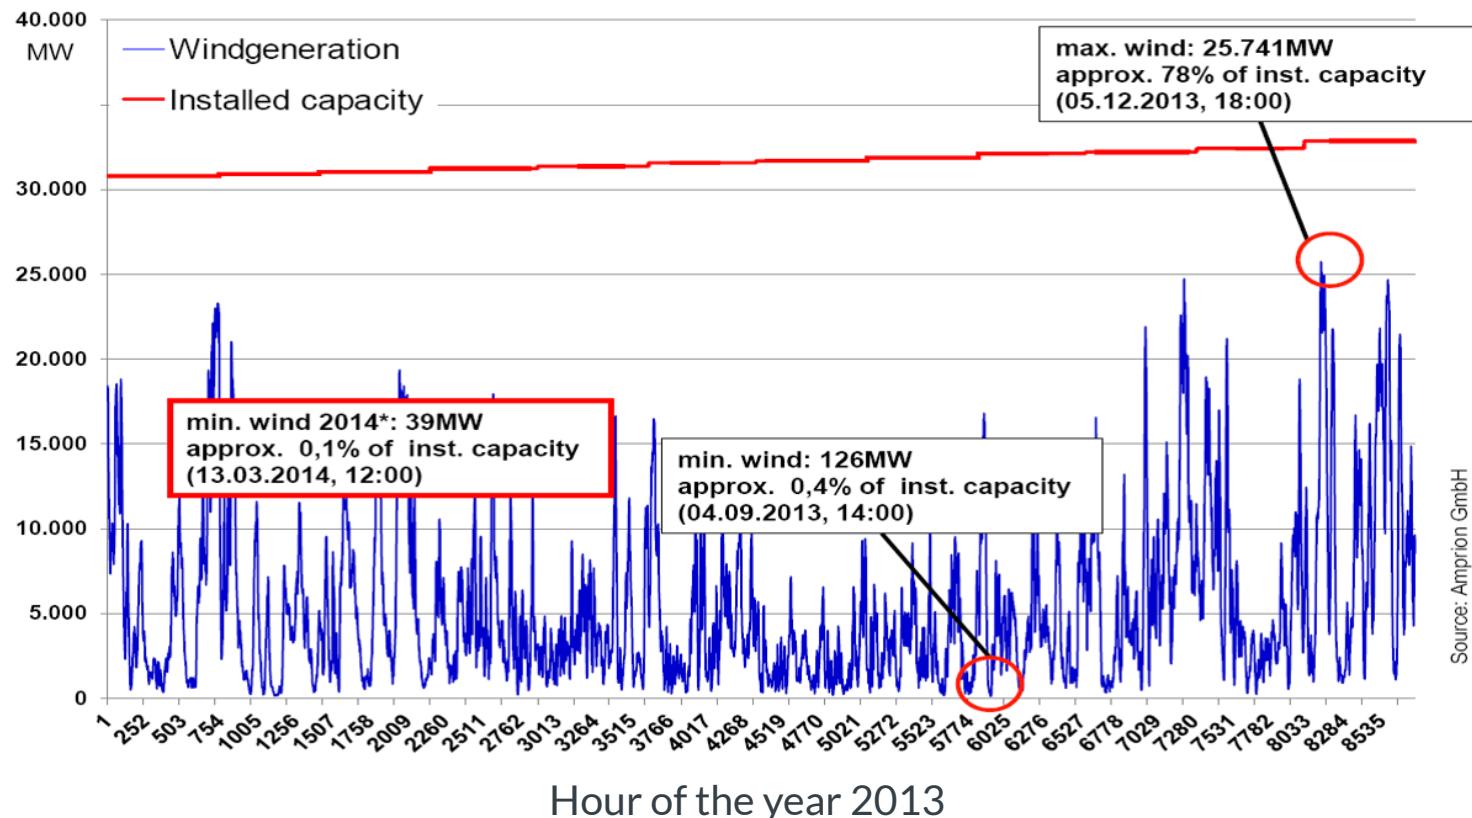


# PV generation potential

[https://re.jrc.ec.europa.eu/pvg\\_download/map\\_index\\_c.html#!](https://re.jrc.ec.europa.eu/pvg_download/map_index_c.html#!)

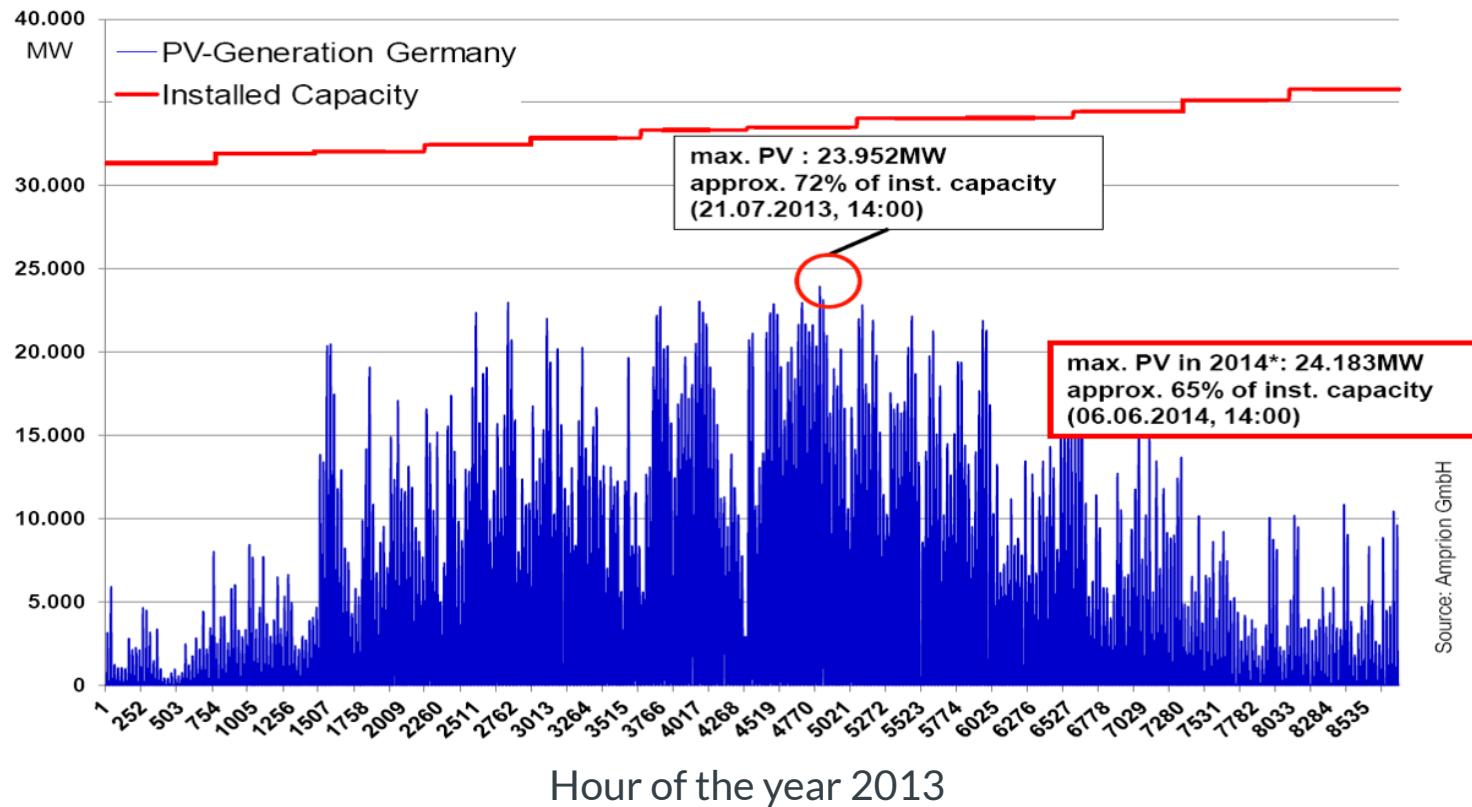

## **5. Power balance**

## The power balance issue

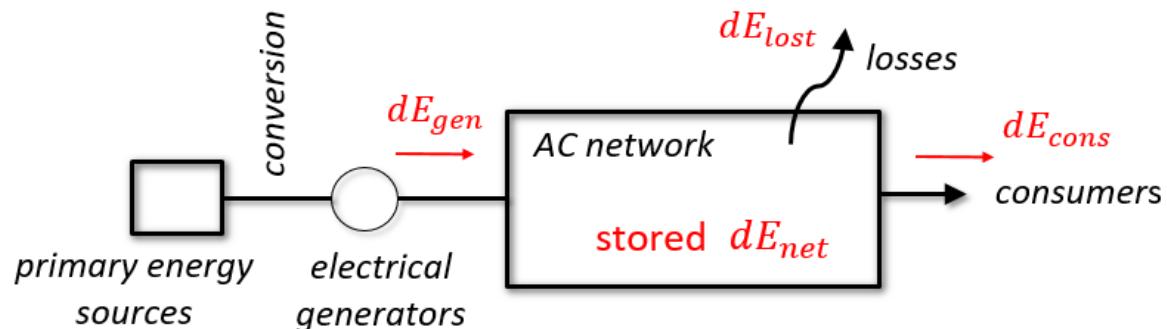

Conservation of Energy over an infinitesimal time  $dt$ :

$$dE_{gen} = dE_{cons} + dE_{lost} + dE_{net}$$

Introducing the corresponding powers at time  $t$ :

$$p_{gen}(t).dt = p_{cons}(t).dt + p_{lost}(t).dt + p_{net}(t).dt$$

Hence

$$p_{gen}(t) = p_{cons}(t) + p_{lost}(t) + p_{net}(t)$$

$p_{cons}(t)$ : The consumers decide how much power they want to consume !

- this demand fluctuates at any time

$p_{lost}(t)$ : Losses mainly due to Joule effects → depend on currents in components

- kept as small as possible, not really controllable

$p_{net}(t)$ : Network elements which store electrical energy : inductors and capacitors

- In sinusoidal steady state, the power in an inductor (or a capacitor) reverts every quarter of a period, and is zero on the average
  - in balanced three-phase operation, the sum of the powers in the inductors/capacitors of the three phases is zero at any time !
  - hence, electrical energy cannot be stored in the AC network
- to be stored, electrical energy has to be converted into another form of energy
  - mechanical: e.g. potential energy of water in the upper reservoir of a pumping station, flywheels, etc.
  - chemical: batteries, but amounts of stored energy are still very small !! Really?
  - [Hornsdale Power Reserve](#)
  - [NGK's batteries](#)

## Conclusion

The variations of load power have to be compensated by the generators but the conversion (primary energy → electrical energy) is not instantaneous

- example: changing the flow of steam or water in a turbine takes a few seconds  
Hence, an “energy buffer” is needed to quickly compensate power imbalances
  - this is provided by the rotating masses of synchronous generators
  - a deficit (resp. excess) of generation wrt load results in a decrease (resp. increase) of speed of rotation speeds (and hence, frequency)
  - in a synchronous generator and its turbine, kinetic energy  $\approx$  nominal power of the generator produced during 2 to 5 seconds
  - controlling the power balance in a power system without rotating machines (only power electronic interfaces) would be a challenge (still at research level) ! Larger variations in load (e.g. during the day) require starting up/shutting down power plants ahead of time

# **6. From DC to AC, large interconnections and the come- back of DC**

## Network: from early DC ...

End of 19th century : Gramme, Edison devised the first generators, that produced Direct Current (DC) under relatively low voltages

Impossibility to transmit large powers with direct current:

- **power = voltage × current**
  - if the voltage cannot be increased, the current must be
  - but **power lost = resistance × current<sup>2</sup>** → big waste of energy
  - and large sections of conductors required → expensive and heavy
- Hard to interrupt a large DC current (no zero crossing), for instance after a short-circuit

## Network: ... to present high-voltage AC

Changing for Alternating Current (AC)

- voltage increased and lowered thanks to the transformer
- standardized values of frequency : 50 and 60 Hz (other values used at a few places)

Larger nominal voltages have been used progressively

- up to 400 kV in Western Europe
- up to 765 kV in North America
- experimental lines at 1100 kV or 1200 kV (Kazakhstan, Japan, etc.)

## Motivations for large interconnections

- Mutual support between partners to face the loss of generation units
- Each partner would have to set up a larger “reserve” if it would operate isolated
- Larger diversity of energy sources available within the interconnection
- Allows exploiting complementarity of nuclear, hydro and wind power plants
- Allows partners to sell/buy energy, to create a large electricity market.


## Constraints:

- If one partner is unable to properly “contain” a major incident, the effects may propagate to the other partners’ networks
- A transaction from one point to another cannot be forced to follow a “contractual” path; it distributes over parallel paths (“wheeling”) : see example on another slide.
  - Partners not involved in the transaction undergo the effects of the power flow.
- In large AC interconnections, there may be emergence of badly damped interarea electromechanical oscillations (frequency in the range 0.1 - 0.5 Hz)
  - Rotors of synchronous generators in one area oscillate against the rotors of generators located in another area
  - It may not be possible to connect two networks with different power quality standards


# European networks

ENTSOe : European Network of Transmission System Operators for electricity

41 Transmission System Operators (TSOs) from 34 countries

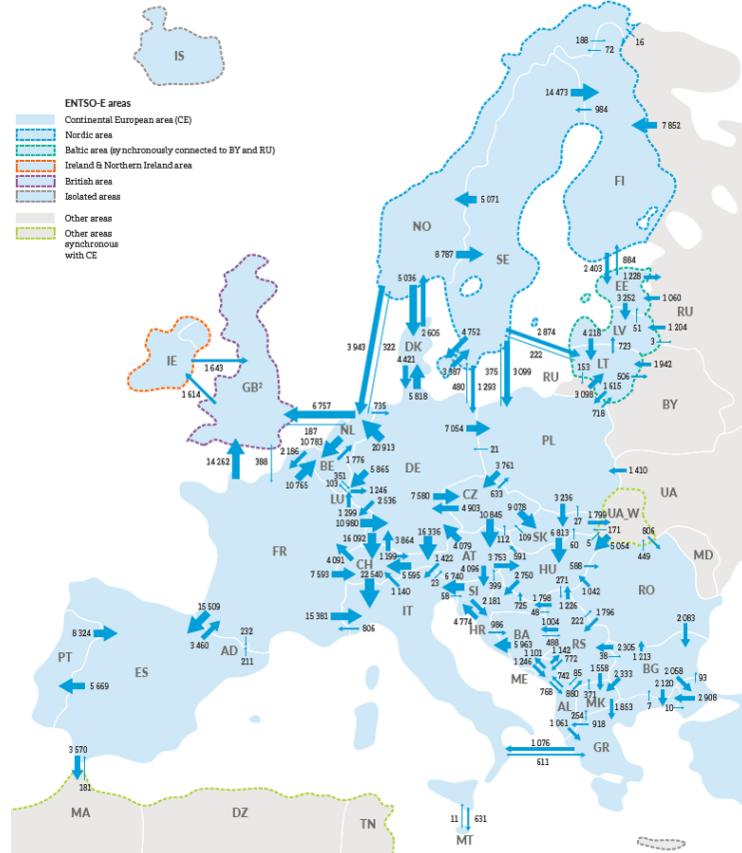


# The synchronous grids of Europe

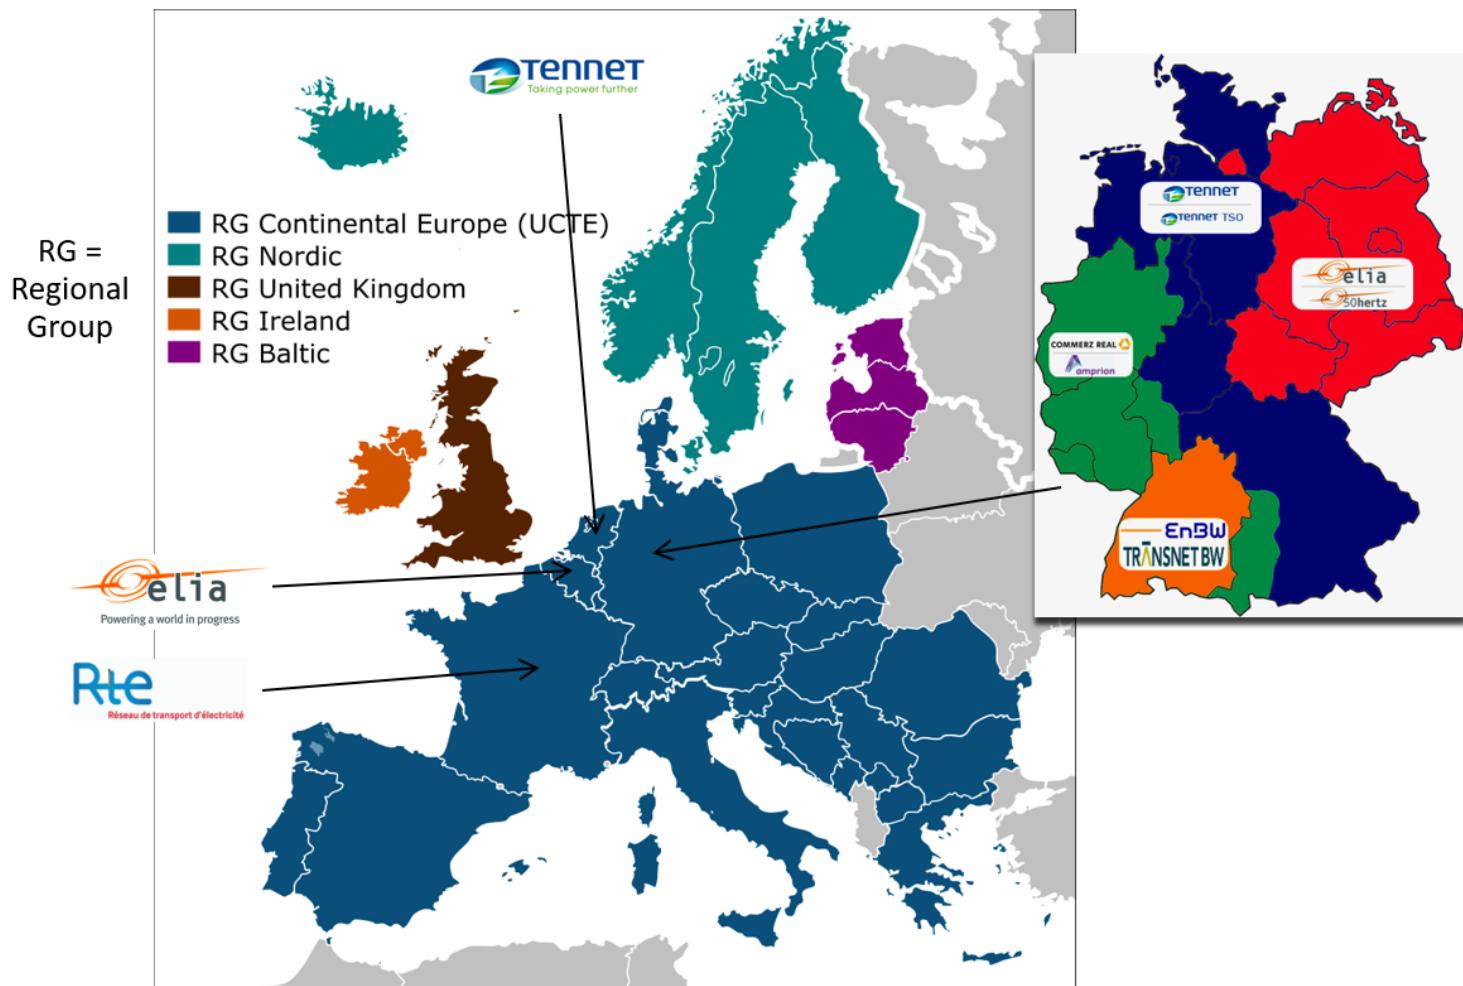

## Example of paths followed by power due to a transaction


Paths taken by a production increment of 100 MW in Belgium covered by a load increase of 100 MW in Italy (variation of losses neglected):

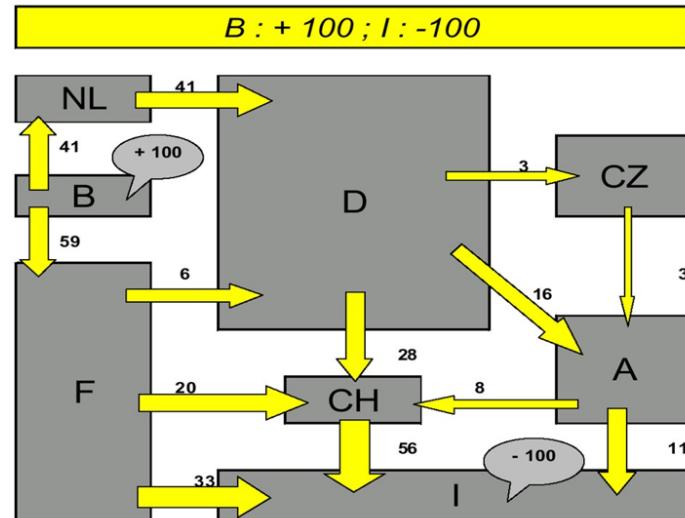

## The come-back of Direct Current

Advances in power electronics → rectifiers and inverters able to carry larger currents through higher voltages → transmission applications made possible


# Transmission over longer distances through overhead lines

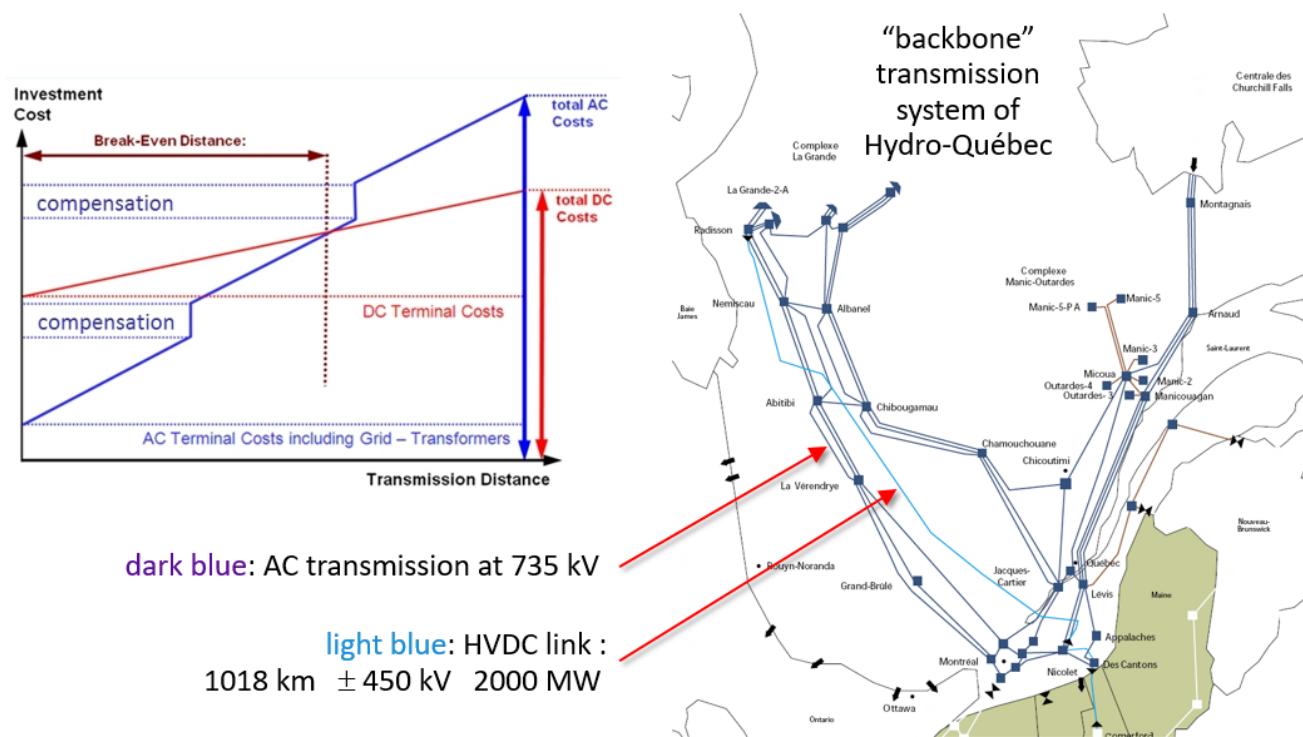

# Transmission through submarine cables

- DC more attractive than AC for distances above  $\geq 50$  km : owing to capacitive effects of AC cables
- Existing links in Europe : see [a previous slide](#)
- Projects involving Belgium: Nemo with England, Alegro with Germany : see [a previous slide](#)


Connection of off-shore wind parks  
(source: ENTSOE, AC and DC  
connections of off-shore wind parks in  
North Sea to the grid of the Tennet  
German TSO, links under construction  
shown with dotted lines):

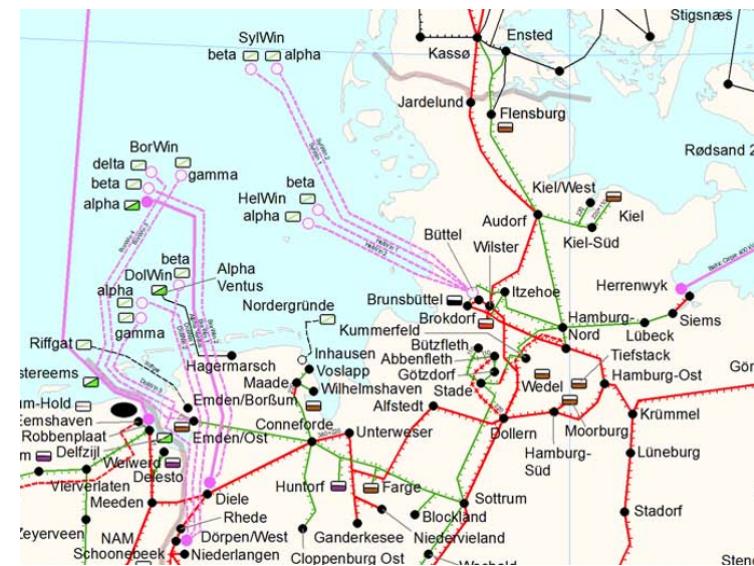

# Connection of AC networks with different frequencies or ...

Two networks with different nominal frequencies

- connection of 50 and 60 Hz systems in Japan
- connection of Brazil at 60 Hz with Argentina at 50 Hz
- two networks that have the same nominal frequency but cannot be merged into a single C network, e.g. for stability reasons
  - UCTE and Russian (IPS/UPS) system
  - Eastern - Western interconnections in North-America
  - Western Europe (see previous slides)

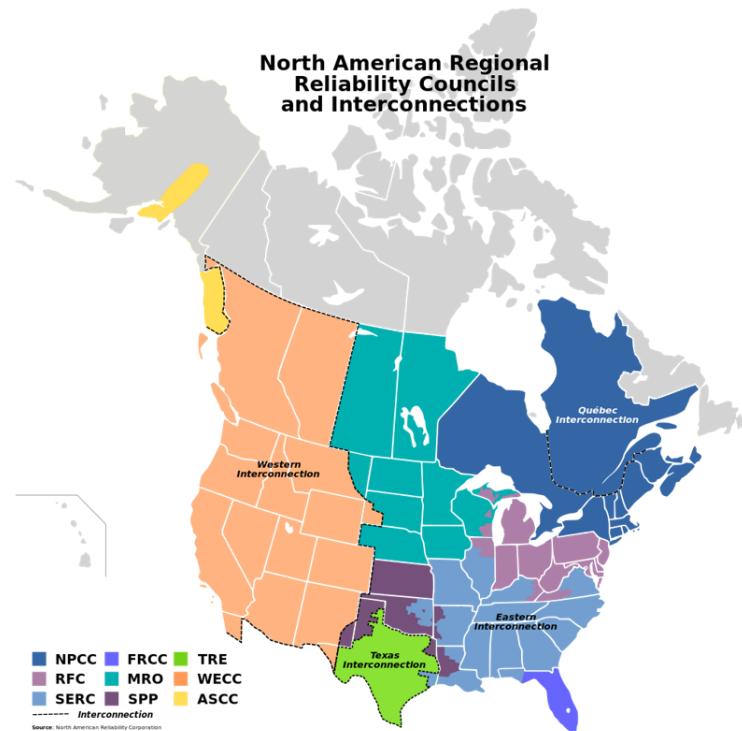

The end.