




ZipTwo® | Micro Profile | 707 Spec Guide

Performance | Zipper LED Continued

Zipper Board has 72 diodes per foot (305mm). Testing based on a 4' rail section. Lumen measurement complies with IES-LM-79-08 testing procedures.

120° Symmetric, black finish (S3-BL)

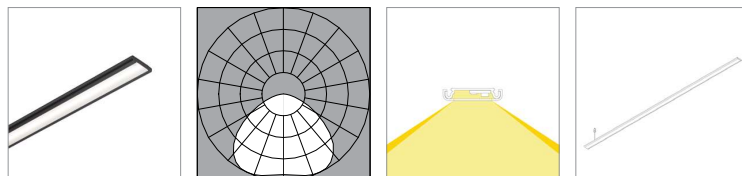

L80 >60,000 hours

	2700K	80 CRI (80min., 84 avg.)				2700K	90 CRI (90min., 96 avg.)		
		3000K	3500K	4000K			3000K	3500K	4000K
Low Output (LO)									
Efficacy - Lumens per Watt	112	115	118	118		88	91	93	94
Lumens per foot (305mm)	414	428	436	436		357	369	376	380
Watts per foot (305mm)	3.8	3.8	3.8	3.8		4.1	4.1	4.1	4.1


Standard Output (SO)

Efficacy - Lumens per Watt	128	132	134	134		110	113	116	117
Lumens per foot (305mm)	829	855	873	873		715	737	752	760
Watts per foot (305mm)	6.6	6.6	6.6	6.6		6.6	6.6	6.6	6.6

High Output (HO)

Efficacy - Lumens per Watt	126	130	133	133		109	112	115	116
Lumens per foot (305mm)	1243	1283	1309	1309		1072	1106	1128	1140
Watts per foot (305mm)	9.9	9.9	9.9	9.9		9.9	9.9	9.9	9.9

85° Asymmetric, black finish (A1-BL)

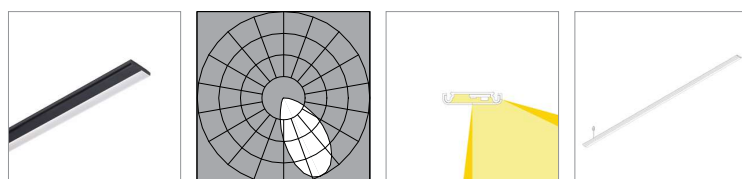

L80 >60,000 hours

	2700K	80 CRI (80min., 84 avg.)				2700K	90 CRI (90min., 96 avg.)		
		3000K	3500K	4000K			3000K	3500K	4000K
Low Output (LO)									
Efficacy - Lumens per Watt	36	37	38	38		31	32	32	33
Lumens per foot (305mm)	131	135	138	138		113	116	119	120
Watts per foot (305mm)	3.8	3.8	3.8	3.8		3.8	3.8	3.8	3.8

Standard Output (SO)

Efficacy - Lumens per Watt	41	42	43	43		35	36	37	37
Lumens per foot (305mm)	262	270	276	276		226	233	238	240
Watts per foot (305mm)	6.6	6.6	6.6	6.6		6.6	6.6	6.6	6.6

High Output (HO)

Efficacy - Lumens per Watt	40	42	42	42		35	36	37	37
Lumens per foot (305mm)	393	405	414	414		339	349	357	360
Watts per foot (305mm)	9.9	9.9	9.9	9.9		9.9	9.9	9.9	9.9

© 2019 Vode Lighting LLC. All rights reserved.

The Vode logo and Vode, ZipTwo, MicroBaffle and Zipper Board names are either registered trademarks or trademarks of Vode Lighting LLC in the United States and/or other countries. All other brand or product names are trademarks or registered trademarks of their respective owners. Due to ongoing innovation, specifications may change without notice.