
ASPEN IMAGING
HEALTHCARE

# iODR1717

## (Wireless&Wired)

**Premium Flat Panel Detector**

for Digital Radiography

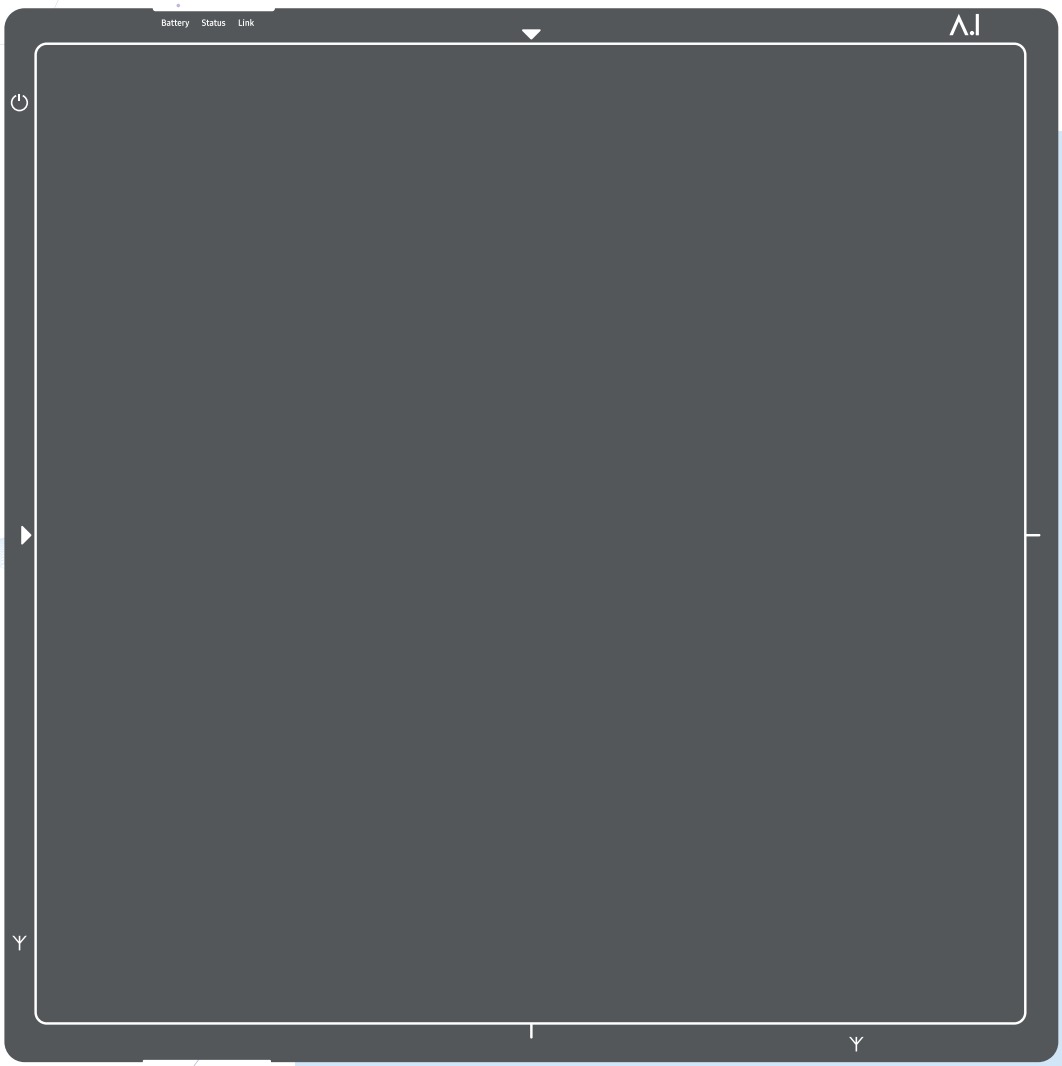



*There are other models with different specifications.

# PREMIUM FLAT PANEL DETECTOR FOR DIGITAL RADIOGRAPHY

Experience the best of both worlds with our iODR1717 Wireless&Wired radiography system. Boasting high Detective Quantum Efficiency (DQE) for excellent imaging quality, coupled with robust durability capable of handling up to 150 kg of distributed load, we ensure resilience and reliability in any clinical setting. Furthermore, with a lower dose of radiation (Low NED value) compared to CR, we make routine screening safer for users.

Designed with ergonomics in mind, featuring side chamfer for ease of lifting and rear grip support for comfortable transportation, our system prioritizes user convenience at every turn.

## EFFICIENCY IN RESULTS WITH THESE KEY FEATURES

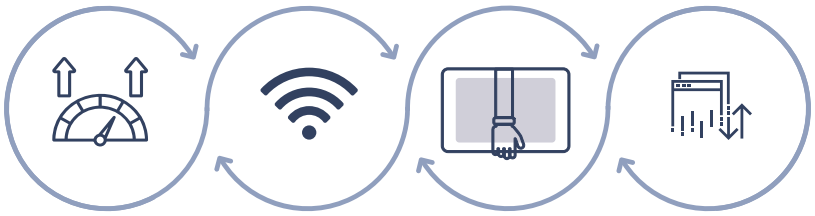


High-performance premium products

Wireless, mobile type

Light-weighted for optimized portability

Supports both wired and wireless communications

## EXCELLENT DOSE REDUCTION WITH EXCEPTIONAL DIAGNOSTIC CLARITY

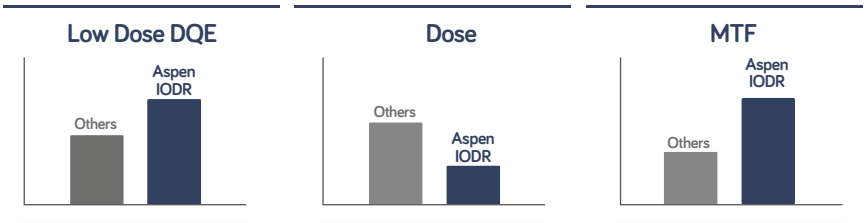


Scintillator Technology
Ultra-Low Noise Electronics

High DQE
Ultra-Low Noise Electronics


Light-weighted for optimized portability



## DETECTOR FEATURES

- Low Dose 47.5% reduction
- DQE 76% (0.01 lp/mm) | MTF 86% (0.5 lp/mm)
- AED, IP54, Wireless&Wired
- Image preview time ≤ 2 sec
- Real-time shock logging

## DIMENSIONS

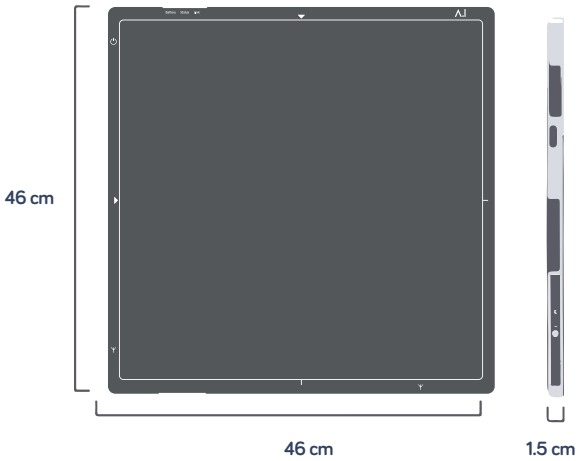


## TECHNICAL SPECIFICATIONS

| CATEGORY | ITEM | IODR1717 |
|---|---|---|
| PERFORMANCE | Detector Type | Amorphous Silicon Tft |
| | Scintillator | Cesium Iodide (Csi) |
| | Active Detector Matrix | 3,040 × 3,036 Pixels |
| | Effective Area | 425.6 Mm × 425.04 Mm |
| | Pixel Pitch | 140 μm |
| | A/D Conversion | 16 Bits |
| | Spatial Resolution | 3.57 Lp/Mm |
| | DQE | 76% (0 Lp/Mm, Typical) |
| | MTF | 86% (0.5 Lp/Mm, Typical) |
| | Installation | Wireless / Tethered |
| | Image Acquisition | Tethered / Wireless (802.11 A/B/G/N & Ac) |
| | AED | Available |
| PHYSICAL | Dimensions (W X D X H) | 460 X 460 X 15 mm |
| | Weight | 3 Kg (Without Battery) |
| | Max. Load Capacity | 150 Kg For Uniform Load |
| | Dust/Water-Resistance | Ip54 |
| | Battery Charging Time | 3 H (Battery Charger) |

ASPEN IMAGING
HEALTHCARE

DISTRIBUTED BY

801 Jupiter Rd Suite 200, Plano, TX 75074, USA
sales@aspenimaging.com | (+1) 214-257-0113

WWW.ASPEN-IMAGING.COM

## About Aspen Imaging

Aspen Imaging Healthcare is a Texas-based Original Equipment Manufacturer (OEM) providing complete imaging solutions for x-ray distributors and custom designed, private-labeled solutions for OEMs across the Americas.

Founded in 2015, Aspen Imaging has become one of the fastest growing Medical Imaging companies with offices in the United States, Mexico and South Korea.

FDA

GOOD MANUFACTURING PRACTICE GMP

ISO ISO 13485