LCD DISPLAY

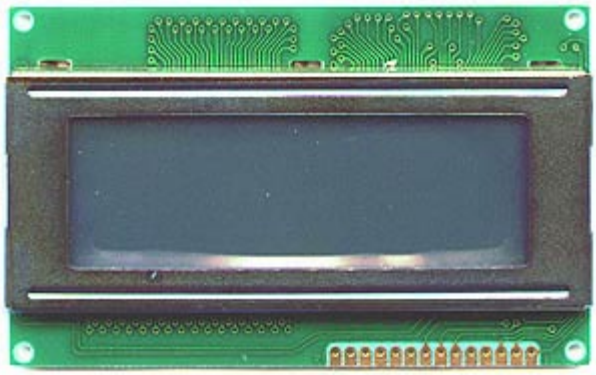

Four lines by 20 characters. Back light attached. Standard 14-pin connection. Optrex #PWB2011.

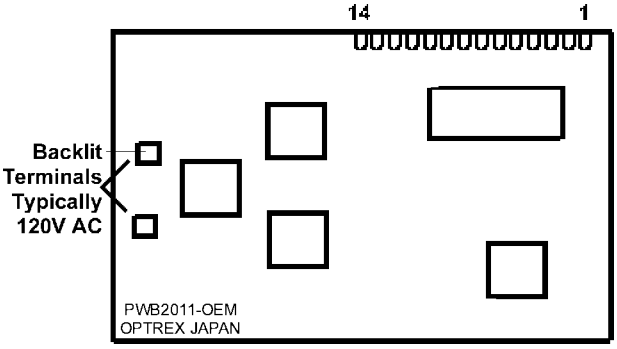

Pin No.	Symbol	I/O	Function
1	Vss		Ground
2	Vdd		+5 Volt Power Supply
3	Vo		Negative Voltage Supply for LCD Driver (not needed)
4	RS	I	Register Select: H = date; L = instruction code
5	R/W	I	Read/Write: H = read from module; L = write to module
6	E	I	Enable
7	DB0	I/O	Data buss lines used only in 8-bit transfers
8	DB1	I/O	"
9	DB2	I/O	"
10	DB3	I/O	"
11	DB4	I/O	Data buss lines used for both 4- and 8-bit transfers
12	DB5	I/O	"
13	DB6	I/O	"
14	DB7	I/O	"
			Pin 14 also serves as a BUSY flag for internal op's