



## 1 Overview

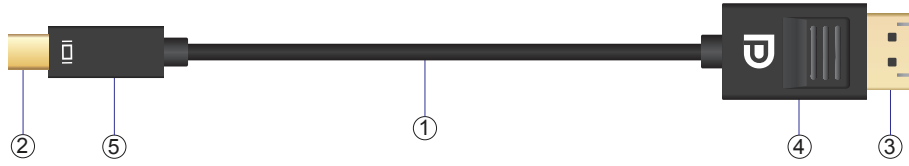
This ALOGIC 1m Mini DisplayPort to DisplayPort Cable Ver 1.2 - Male to Male cable allows for a connection between a computer enabled with a Mini DisplayPort output like Apple Mac, HP, Lenovo, Dell, Ultrabook and laptop to a display enabled with a DisplayPort input. The cable can support resolutions up to 3840 X 2160.

## 2 Features

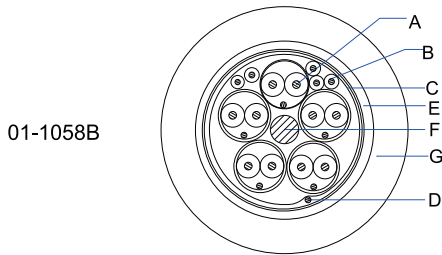
- \* Durable moulded DisplayPort connectors with latch design.
- \* Gold Plated connectors for best connectivity and minimum losses.
- \* Retail Box Packaging.
- \* Warranty: Life Time

## 3 Specifications

- \* 28 gauge (AWG) pure copper wire
- \* Aluminium and Mylar shielding to help eliminate EMI and RFI
- \* Resolution capability of up to 3840 X 2160.
- \* (1) Mini DisplayPort Male to (1) DisplayPort Male

**4 Design:**


No.	Part No.	Descriptions	Q'ty
①	01-1058B	Cable(OD:4.2mm)	1
②	02-1444PG	Cable(OD:5.5mm)	1
③	02-1449PG	DP Plug	1
④	004-DPB-A13	Shell(DP Plug)	1
⑤	004-MDPB-A13	Shell(HDMI Plug)	1

**5 Cable Specifications:**


A	Conductor	Ø 0.06mm/7 34AWG OFC tinned copper wires
	Insulator	Ø 0.5mm FPE+SKIN
	Drain	Ø 0.1mm/7 30AWG OFC tinned copper wires
	Shield	Aluminium foil
B	Conductor	Ø 0.08mm/7 32AWG OFC tinned copper wires
	Insulator	Ø 0.5mm FPE
C	Shield	Aluminium foil
D	Drain	Ø 0.1mm/7 OFC bare copper wires
E	Shield	Ø 0.08mm/16x8 OFC tinned copper braided
F	Filler	PP rope
G	Jacket	Ø 4.2mm PVC in black colour

## 6 Part No.

Part No.	Length	Packaging	Colour
MDP-DP-01-MM	1m	Retail Box	Black
MDP-DP-02-MM	2m	Retail Box	Black
MDP-DP-03-MM	1m	Retail Box	Black

## 7 Connection Guide

