A developer has created a three-tier web application for network device control and management. The application consists of multiple objects assigned for different functionalities. When a configuration change is pushed to a running device, the status is reflected on the dashboard simultaneously. The architecture of the application is based on the Observer pattern. Which advantage does this pattern provide for the application design and architecture?

A Dependent objects are updated automatically. ✓ CORRECT

B One object can query the state of other objects.

C It reinforces the object dependency.

D It updates the state of dependent objects directly.

SUGGESTED ANSWER

The suggested answer is A.

examice.com

DRAG DROP

Drag and drop the code snippets from the bottom onto the blanks in the Python script to construct a unit test that checks the API response. Not all options are used.

```
import requests
from requests.exceptions import HTTPError
import unittest
import json
from apicars import app

class TestsAPIRovers(unittest.TestCase):
  def setUp(self):
      self.app = app.test_client()

 # Check status response of API
  def _test_status_(self):
       resp = self.app.get('/rovers/all')
       status_code = [          ]
       self.assertEqual(status_code,200)

 # Check for content type is in application/json
  def _test_content_type(self):
       resp = self.app.get('/rovers/all')
       self.assertEqual([          ], 'application/json')

 def test_car_retrieval_with_id(self):
     resp = self.app.get('/rovers?id=1')
     data = json.loads(resp.data)
     [          ](len(data) == 1)
if __name__ == '__main__':
  unittest.main()
```

resp.status_code	self.assertTrue	resp.status_codes
resp.content_type	self.assertFalse	resp.content_data


SUGGESTED ANSWER



Personal copy · kamjunhao@gmail.com

DRAG DROP

- -

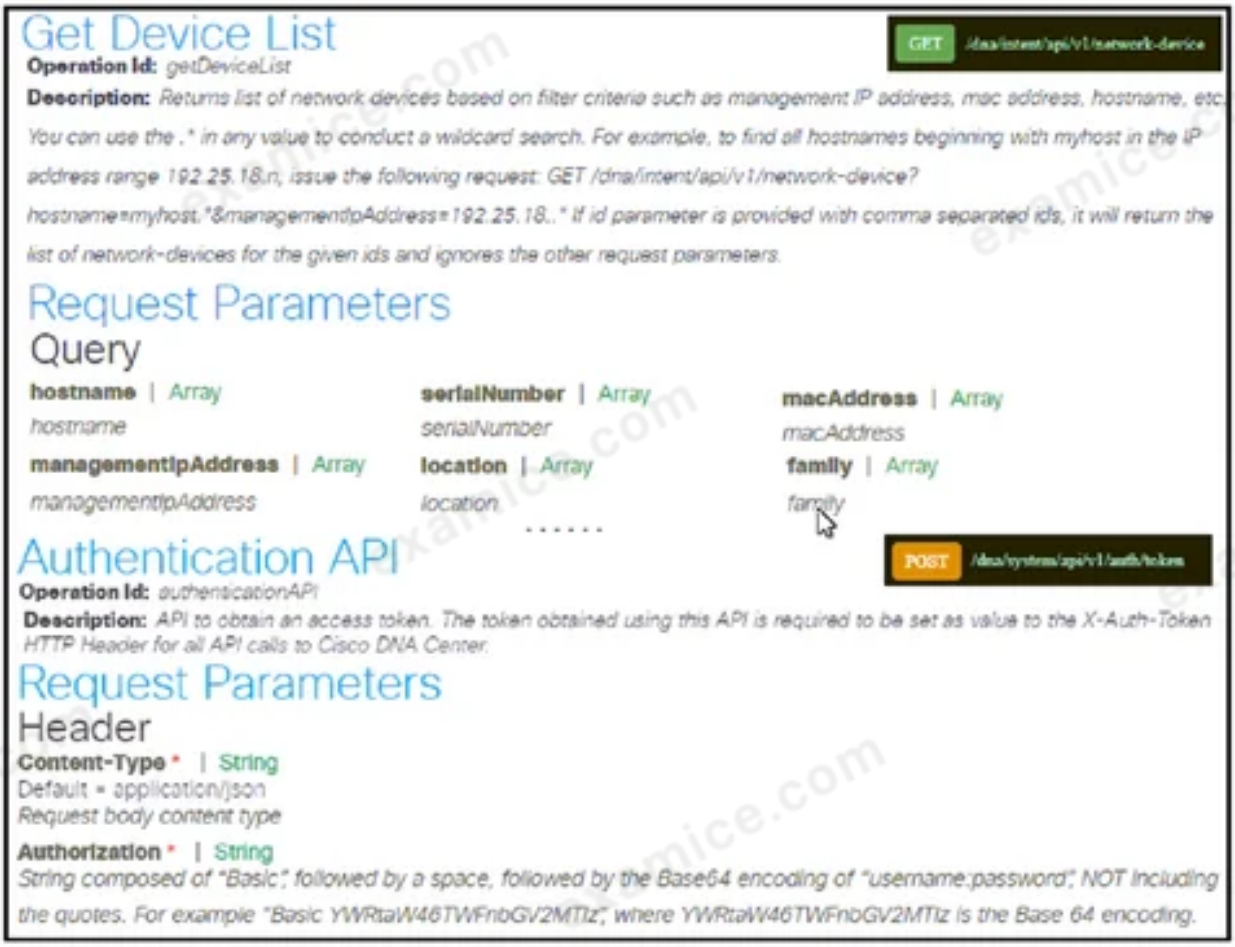

Refer to the exhibit. Drag and drop the code snippets from the bottom onto the blanks in the Python script to retrieve a list of hosts using the Cisco DNA Center API. Not all options are used.

```
import json, requests, urllib3
from requests.auth import HTTPBasicAuth
from config import host, username, password

headers = { 'content-type': "                    ", 'x-auth-token': "csd0934rjxx" }

def dna_api_auth(host, username, password):!
    url = "https://{}/dna/intent/api/v1/network-device/auth/token".format(host)
    response = requests.post(url, auth=HTTPBasicAuth(username, password),
               headers=headers, verify=False)
    return response.                    ["Token"]

def list_dna_devices(token):
    url = "https://{}/api/v1/network-device".format(host)
    headers["x-auth-token"] = token
    response = requests.get(url, headers=headers, verify=False)
    data = response.json()
    for item in                    :
        print(item["hostname"])

token = dna api auth(host, username, password)
list_dna_devices(                    )
```

application/json	data['response']:	"Token"
json()	token	[0]

SUGGESTED ANSWER

```
import json, requests, urllib3
from requests.auth import HTTPBasicAuth
from config import host, username, password

headers = { 'content-type': "application/json", 'x-auth-token': "csd0934rjxx" }

def dna_api_auth(host, username, password):!
    url = "https://{}/dna/intent/api/v1/network-device/auth/token".format(host)
    response = requests.post(url, auth=HTTPBasicAuth(username, password),
               headers=headers, verify=False)
    return response.                    ["Token"]

def list_dna_devices(token):
    url = "https://{}/api/v1/network-device".format(host)
    headers["x-auth-token"] = token
    response = requests.get(url, headers=headers, verify=False)
    data = response.json()
    for item in                    :
        print(item["hostname"])

token = dna api auth(host, username, password)
list_dna_devices(                    )
```

application/json	data['response']:	"Token"
json()	token	[0]

Issued to kamjunhao@gmail.com · October 17, 2026

An engineer wants to make a local web server accessible over the Internet using Static NAT. What does Static NAT map in the network?

A many public IP addresses to a single local IP address

B many local IP addresses to a pool of public IP addresses

C single local IP address to single public IP address ✓ CORRECT

D many local IP addresses to a single public IP address

SUGGESTED ANSWER

The suggested answer is C.

```
import requests
def main(token):
    count_client = 0
    url = 'https://172.18.3.252/dna/intent/api/v1/client-health'
    headers = {
        "Content-Type": "application/json",
        "Accept": "application/json",
        "X-auth-Token": token
    }
    response = requests.get(url,headers=headers, verify=False).json()
    for score in response['response'][0]['scoreDetail']:
        try:
            for category in score['scoreList']:
                print('\tType: {0}, Count: {1}'.format(
                    category['scoreCategory']['value'],
                    category['clientCount']))
                count_client = count_client + category['clientCount']
        except:
            pass
    print(count_client)
def auth():
    url = "https://172.18.23.52/dna/system/api/v1/auth/token"
    headers = {
        'Authorization': 'Basic FeBCH2NNEY9KD='
    }
    r=requests.post(url,headers=headers,data={},verify=False)
    return r.json()['Token']
if __name__ == '__main__':
    token = auth()
    main(token)
```

Refer to the exhibit. A support team deploys Cisco DNA Center to monitor and manage its entire network infrastructure. A network engineer on the support team creates a Python script to automate the generation of statistics and send the results to the team. Which workflow does the script automate?

A Count all the clients on the wireless and wired network and display their security score.

B Display all the clients that have a security score of Fair.

C Count all the clients on the wireless and wired network and display their health details. ✓ CORRECT

D Count all the clients on the wired network.

SUGGESTED ANSWER

The suggested answer is C.

DRAG DROP

- -

Drag and drop the code from the bottom onto the box where the code is missing to present GigabitEthernet2 details in the XML format. Not all options are used.



SUGGESTED ANSWER



DRAG DROP

- -

UcsHandle class is the user interface point for any Ucs related communication.

Parameters:
- **ip** (*str*) – The IP or Hostname of the UCS Server
- **username** (*str*) – The username as configured on the UCS Server
- **password** (*str*) – The password as configured on the UCS Server
- **port** (*int or None*) – The port number to be used during connection
- **secure** (*bool or None*) – True for secure connection, otherwise False
- **proxy** (*str*) – The proxy object to be used to connect

Example

handle = UcsHandle("192.168.1.1","admin","password")

Refer to the exhibit. An engineer needs to retrieve all the organizations in a Cisco UCS Manager deployment. Drag and drop the code snippets from the bottom onto the blanks in the Python script to print the information to standard output. Some options may be used more than once. Not all options are used.

```
from ucsmsdk.ucshandle import [          ]
connection = [          ]("10.10.20.113", "ucspe", "ucspe")
connection.[          ]()
orgs = []
ucsm_orgs = connection.[          ]("orgOrg")
for org in ucsm_orgs:
    temp_org = {"name": org.name, "dn": org.dn, "rn": org.rn}
    orgs.append(temp_org)
print(orgs)
```

query_classid	UcsConnection	query	init
UcsHandle	login		

SUGGESTED ANSWER



```
interface GigabitEthernet0/0/0
 no ip address
 negotiation auto
!
interface GigabitEthernet0/0/0.10
 encapsulation dot1Q 20
 ip address 192.168.20.2 255.255.255.0
!
interface GigabitEthernet0/0/2
 ip address 173.38.153.102 255.255.255.252
 ip nat outside
 negotiation auto
!
ip nat pool NAT_POOL 42.42.4.2 42.42.4.2 netmask 255.255.255.0
ip nat inside source list 42 pool NAT_POOL overload
access-list 42 permit 192.168.0.0 0.0.42.255
```

Refer to the exhibit. A company recently acquired new IP-based security cameras. After discussion with the engineering team, they decide to segment the security camera traffic from the rest. The engineer assigns the new VLAN 10 for the security camera traffic. After all the devices are configured, it seems as if the cameras cannot access the Internet. After a few minutes of debugging, the engineer restricts the problem to the router configuration. What is the cause of the issue?

A. A NAT inside rule is missing from the GigabitEthernet0/0/0.10 interface. ✓ CORRECT

B. A specific permit statement for the 192.168.20.0/24 subnet is missing from the access list.

C. A NAT inside rule is missing from the GigabitEthernet0/0/0 interface.

D. A specific permit statement for the 192.168.10.0/24 subnet is missing from the access list.

SUGGESTED ANSWER

The suggested answer is A.


DRAG DROP

-

Drag and drop the code from the bottom onto the box where the code is missing to construct a Python script that calls a REST API request. Not all options are used.



SUGGESTED ANSWER

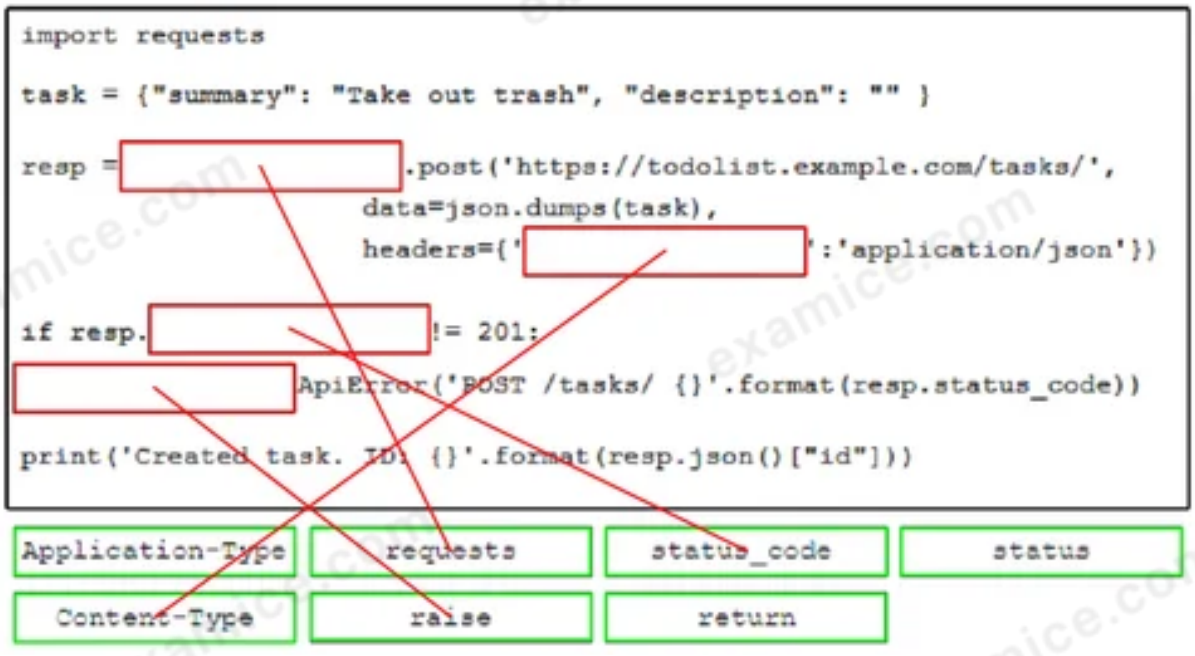

```
#!/bin/bash
echo "Enter your commit message…"
read message
echo "Which branch?"
read branch
git add .
git commit -m"${message}"
git push -u origin ${branch}
echo "data pushed."
```

Refer to the exhibit. A developer notices that some tasks are repeated in the development workflow. To reduce the amount of work, the developer creates a Bash script to use during the development process. The script uses messages to interact with the user and integrates with a version control system. Which workflow is automated by the script?

A Update the master branch with an untracked file.

B Push all changed files on Git with a message on a branch. ✓ CORRECT

C Undo a commit.

D Push on the current branch.

SUGGESTED ANSWER

The suggested answer is B.