> sites.txt with the information in template.conf, creating a link for the previously created file, and then changing the ownership of the created files.

Personal copy · kamjunhao@gmail.com

```
import requests

headers = {"X-Cisco-Meraki-API-Key": "KEY1234"}
BASE_URL = "https://api-mp.meraki.com/api/v1"
FIRST_URL = "/organizations"
SECOND_URL = "/networks"
THIRD_URL = "clients"

def first_loop(info):
    for item in info:
        if item["name"] == "ACME":
            URL = BASE_URL + FIRST_URL + "/" + item["id"] + "/" + SECOND_URL
            response = requests.request("GET", URL, headers=headers)
            return second_loop(response.json())

def second_loop(info):
    for item in info:
        if item["name"] == "BLDG21":
            URL = BASE_URL + SECOND_URL + "/" + item["id"] + "/" + THIRD_URL
            response = requests.request("GET", URL, headers=headers)
            return third_loop(response.json())

def third_loop(info):
    for item in info:
        return item

response = requests.request("GET", BASE_URL + FIRST_URL, headers=headers)
info = first_loop(response.json())
for item in info:
    print (item["id"])
```

Refer to the exhibit. A network engineer must collect information from the network. The engineer prepares a script to automate workflow by using Cisco MerakiAPI. The script must run over nested loops to collect organization and network information and uses the collected data for final collection. Which process is being automated by using the Python script?

A Collect the IDs of the clients on the BLDG21 network. ✓ CORRECT

B List the IDs from the ACME organization.

C Provide the BLDG21 network information if it is part of the ACME organization.

D Gather the IDs of the ACME organization, the BLDG21 network, and the clients on the network.

SUGGESTED ANSWER

The suggested answer is A.

> The script is designed to collect data by making several API calls in sequence. It first retrieves the organizations and filters out the one named 'ACME.' Next, within this organization, it looks for the network named 'BLDG21.' Finally, it gathers the client information for this specific network. The only IDs that are being printed at the end of the script are those of the clients within the 'BLDG21' network. This indicates that the process being automated here is specifically collecting the IDs of the clients on the BLDG21 network.

Personal copy · kamjunhao@gmail.com

Refer to the exhibit.

```
def process_devices(dnac, token):
    url = "https://{}/api/v1/network-device".format(dnac['host'])
    headers["x-auth-token"] = token
    response = requests.get(url, headers=headers, verify=False)
    data = response.json()
    for item in data['response']:
        print(item["hostname"]," ", item["managementIpAddress"])
```

What is the function of the Python script?

A Loop through the returned list of network devices and, for each device, print the device name and management IP address. ✓ CORRECT

B Count and print the total number of available devices.

C For each device that is returned, display the device type and associated management IP address.

D Iterate over a list of network devices and write all device names and management IP addresses to an output file.

SUGGESTED ANSWER

The suggested answer is A.

The Python script defines a function called process_devices that takes two arguments: dnac and token. The function constructs a URL for the network-device API endpoint using the dnac host value, sets up headers with the authentication token, and makes a GET request to the URL. It then processes the JSON response. The for loop iterates through each device in the response and prints the hostname and management IP address of each device. Therefore, the function's purpose is to loop through the returned list of network devices and print the device name and management IP address for each device.

Issued to kamjunhao@gmail.com · October 17, 2026

```
--- README.md-repo  2019-10-06 21:15:59.000000000 +0100
+++ README.md       2019-10-06 21:07:35.000000000 +0100
@@ -88,8 +88,6 @@
  ```


-
-
 ## Troubleshooting

 ### CMake
@@ -162,4 +160,13 @@

 ## References

+### Mosquitto
+
+* [github](https://github.com/eclipse/mosquitto)
+* [homepage](https://mosquitto.org)
+
+### MQTT
+
+* [organisation](http://mqtt.org)
+
```

Refer to the exhibit. The output of the diff -u README.md-repo README.md command is shown. The original file was 165 lines long. How many lines are in the edited copy of the file?

A 162

B 165

C 172 ✓ CORRECT

D 173

SUGGESTED ANSWER

The suggested answer is C.
```

QUESTION 205

Issued to kamjunhao@gmail.com · October 17, 2026

Which line is an example of the start of a chunk from a unified diff?

A @@ -20191007T1200 +88,90 @@

B @@ -88,10 +88,6 @@ ✓ CORRECT

C @@ -90,88 +20191008T1349 @@

D @@ -20191007T1200 +20191008T1349 @@

SUGGESTED ANSWER

The suggested answer is B.

A unified diff's chunk header syntax starts with '@@', followed by the line ranges in the format '-start,length +start,length'. Option B correctly follows this format with '@@ -88,10 +88,6 @@', indicating changes from line 88 with a length of 10 in the original file and starting from line 88 with a length of 6 in the new file.

DRAG DROP -

Drag and drop elements of the RESTCONF Protocol stack from the left onto the correct descriptors on the right. Not all elements on the left are used.

Select and Place:

SUGGESTED ANSWER

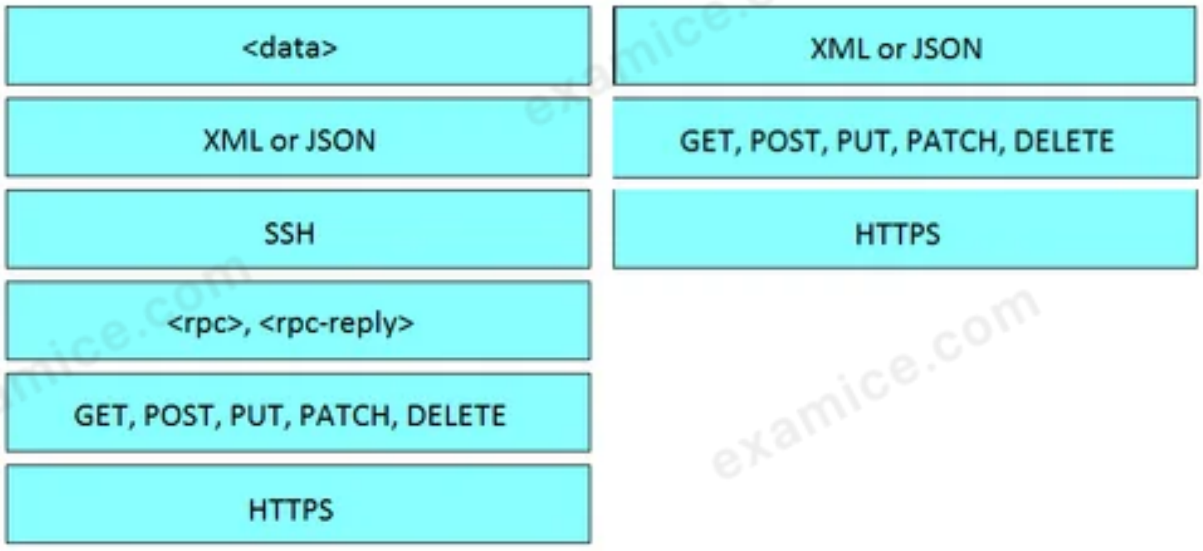

Issued to kamjunhao@gmail.com · October 17, 2026

Which two **NETCONF** operations cover the RESTCONF GET operation? (Choose two.)

A <get> ✓ CORRECT

B <get-config> ✓ CORRECT

C <get-update>

D <modify-config>

E <edit>

SUGGESTED ANSWER

The suggested answer is A, B.

The NETCONF operations that cover the RESTCONF GET operation are and . The operation is used to retrieve running configuration and device state information. The operation is used to retrieve all or part of the specified configuration data store. These operations collectively match the functionality of the RESTCONF GET operation, which is used to retrieve configuration and state data from a device.

Refer to the exhibit.

```
---
- hosts: CISCO_ROUTER_01
  gather_facts: true
  connection: network_cli

  tasks:
    - name: show conf
      ios_command:
        commands:
          - show running-config
      register: config

- name: save output to /etc/ansible/configs
  copy:
    content: "{{ config.stdout[0] }}"
    dest: "/etc/ansible/configs/show_conf_{{ inventory_hostname }}.txt"
```

What is the result of executing this Ansible playbook?

A The playbook copies a new start-up configuration to CISCO_ROUTER_01

B The playbook copies a new running configuration to CISCO_ROUTER_01

C The playbook backs up the running configuration of CISCO_ROUTER_01 ✓ CORRECT

D The playbook backs up the start-up configuration of CISCO_ROUTER_01

SUGGESTED ANSWER

The suggested answer is C.

The Ansible playbook shown executes the 'show running-config' command on the CISCO_ROUTER_01 device and saves the output to a file at '/etc/ansible/configs/show_conf_CISCO_ROUTER_01.txt'. This indicates the playbook's purpose is to back up the current active configuration of the router, also known as the running configuration. Therefore, the correct result of executing this playbook is that it backs up the running configuration of CISCO_ROUTER_01.

Refer to the exhibit.

```
---
- hosts: switch2960cx
  gather_facts: no

  tasks:
    - ios_l2_interface:
        name: GigabitEthernet0/1
        state: unconfigured

    - ios_l2_interface:
        name: GigabitEthernet0/1
        mode: trunk
        native_vlan: 1
        trunk_allowed_vlans: 6-8
        state: present

    - ios_vlan:
        vlan_id: 6
        name: guest-vlan
        interfaces:
          - GigabitEthernet0/2
          - GigabitEthernet0/3

    - ios_vlan:
        vlan_id: 7
        name: corporate-vlan
        interfaces:
          - GigabitEthernet0/4
```

Which two statements describe the configuration of the switch after the Ansible script is run? (Choose two.)

A Traffic from ports 0/2 to 0/5 is able to flow on port 0/1 due to the trunk. ✓ CORRECT

B GigabitEthernet0/1 is left unconfigured.

C GigabitEthernet0/2 and GigabitEthernet0/3 are access ports for VLAN 6. ✓ CORRECT

D Traffic is able to flow between ports 0/2 to 0/5 due to the trunk on port 0/1.

E Traffic on ports 0/2 and 0/3 is connected to port 0/6.

SUGGESTED ANSWER

The suggested answer is A, C.

GigabitEthernet0/1 is configured as a trunk port with VLANs 6-8 allowed, so traffic from ports 0/2 to 0/5 can flow through this port due to the trunk configuration. Additionally, GigabitEthernet0/2 and GigabitEthernet0/3 are configured as access ports for VLAN 6, making option C correct as well.

Personal copy · kamjunhao@gmail.com

Refer to the exhibit.

```
---
- hosts: {{ router }}
  gather_facts: true
  connection: local

  tasks:
    - ios_command
      commands:
       - show run
      provider: "{{ router_credentials }}"
    register: config

    - copy:
        content: "{{ config.stdout[0] }}"
        dest: "etc/ansible/configs/command_{{ router_hostname }}.txt
...
```

What is the effect of this Ansible playbook on an IOS router?

A A new running configuration is pushed to the IOS router.

B The start-up configuration of the IOS router is copied to a local folder.

C The current running configuration of the IOS router is backed up. ✓ CORRECT

D A new start-up configuration is copied to the IOS router.

SUGGESTED ANSWER

The suggested answer is C.

The Ansible playbook retrieves the current running configuration of the IOS router using the command 'show run'. It then stores this output, which is registered as 'config'. Finally, the content of 'config.stdout[0]' is copied to a specified location on the local machine, effectively backing up the running configuration of the IOS router.

Issued to kamjunhao@gmail.com · October 17, 2026

Which configuration management tool has an agentless capability?

A Puppet

B CFEngine

C Ansible ✓ CORRECT

D Chef

SUGGESTED ANSWER

The suggested answer is C.

Ansible is a configuration management tool that is agentless, meaning it does not require any software or agent to be installed on the managed devices. Instead, Ansible uses standard SSH or Windows Remote Management to manage devices, making it simple and efficient for managing a wide array of systems without additional installations.

Issued to kamjunhao@gmail.com · October 17, 2026

Which toot allows changes to the configuration management toolset to be tested?

A pyATS

B NAPALM

C Cisco VIRL ✓ CORRECT

D Ansible

SUGGESTED ANSWER

The suggested answer is C.

Cisco VIRL is a network simulation platform that allows for the testing and validation of network configurations and changes to the configuration management toolset in a virtual environment. It provides an environment where different network topologies can be simulated, and changes can be tested safely without impacting live networks. This allows users to validate changes, configurations, and management toolsets comprehensively before deploying them in production environments.

```
1  - hosts: servers
2    tasks:
3
4      - name: task1
5        systemd:
6          name: webexbot
7          state: stopped
8
9      - name: task2
10       apt:
11         name: teamsbot
12
13     - name: task3
14       apt:
15         name: webexbot
16         state: absent
17         purge: yes
```

Refer to the exhibit. A developer must integrate a bot with an internal communication app. The developer wants to replace the webexbot package with the teamsbot package by using Ansible and prepares a playbook. In the first two tasks, the playbook stops the webexbot and verifies that the teamsbot is installed.

What is accomplished in the last task of the workflow when the developer runs the Ansible playbook?

A uninstalls the webexbot package and removes its configuration files ✓ CORRECT

B installs the webexbot and retains the configuration files

C stops the webexbot service and uninstall it and retains its configuration files

D searches whether the purge package is available in the repository and uninstalls the webexbot package

SUGGESTED ANSWER

The suggested answer is A.

In Ansible, when a package state is set to 'absent' along with the 'purge' option set to 'yes,' it means that the package will be uninstalled and its configuration files will be removed. Therefore, in the last task, the webexbot package is uninstalled and its configuration files are also purged.

Personal copy · kamjunhao@gmail.com

DRAG DROP -

Drag and drop the types of management from the left onto the levels at which they are performed on the right.

Select and Place:

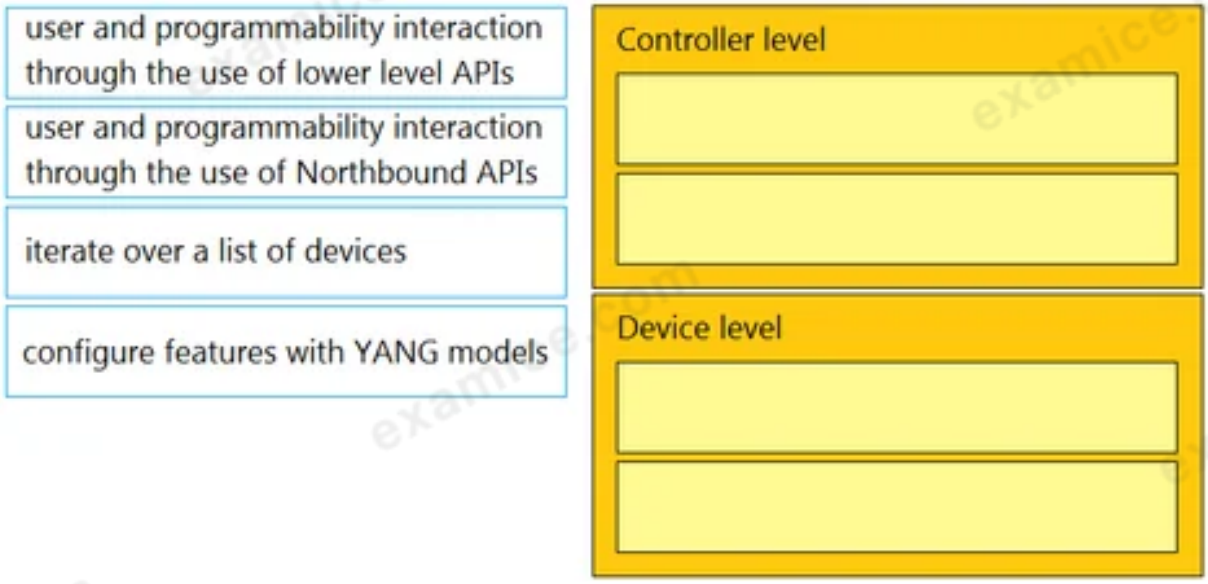

SUGGESTED ANSWER

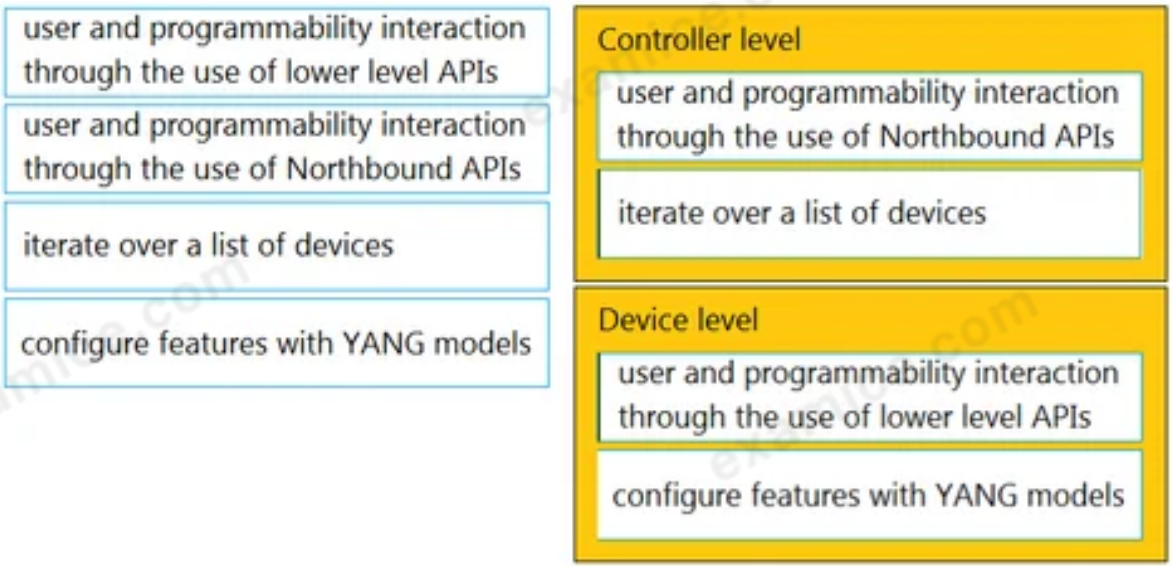

Refer to the exhibit.

```
leaf IPPeer {
  type union {
    type inet:ipv4-address;
    type inet:ipv6-address;
  }
}
```

What is the value of the node defined by this YANG structure?

A.

```
{
 "IPPeer": [
   "10.1.1.1"
 ]
}
```

B.

```
{
 "IPPeer": "10.1.1.1 2001:db::1"
}
```

C.

```
{
 "IPPeer": "10.1.1.1"
}
```

D.

```
{
 "IPPeer": [
   "10.1.1.1",
   "2001:db::1"
 ]
}
```

SUGGESTED ANSWER

The YANG data model defined by the exhibit uses a 'union' type for the 'IPPeer' leaf, which means that 'IPPeer' can hold a value of either an IPv4 address or an IPv6 address, but not both at the same time. Given this, the value for 'IPPeer' should be represented as either one IPv4 address or one IPv6 address in JSON format. Among the options provided, the correct answer is C, as it properly formats 'IPPeer' to an IPv4 address string. Therefore, the value of the node defined by this YANG structure is: {"IPPeer": "10.1.1.1"}.

Personal copy · kamjunhao@gmail.com

Issued to kamjunhao@gmail.com · October 17, 2026

What is an advantage of using network programmability?

A Manual configuration is faster.

B No cloud abstraction occurs.

C It removes CLI access for devices.

D It provides for more scalable and replicable network provisioning. ✓ CORRECT

SUGGESTED ANSWER

The suggested answer is D.

Network programmability provides for more scalable and replicable network provisioning by enabling automation and centralized control. This allows for efficient management of large networks, reduces the chances of human error, and speeds up deployment and configuration processes. It does not inherently involve removing CLI access, manual configuration being faster, or the absence of cloud abstraction.

What is a capability of an agentless configuration management system?

A It requires managed hosts to have an interpreter for a high-level language such as Python or Ruby.

B It requires managed hosts to connect to a centralized host to receive updated configurations.

C It uses compiled languages as the basis of the domain-specific language to interface with managed hosts.

D It uses existing protocols to interface with the managed host. ✓ CORRECT

SUGGESTED ANSWER

The suggested answer is D.

An agentless configuration management system does not require any additional software or agents to be installed on the managed hosts. Instead, it leverages existing protocols such as SSH, NETCONF, or REST API to interface with the managed devices. This allows for seamless configuration management without the need for specific language interpreters or compiled languages on the managed hosts.

```
def enable_function(if_name, if_status, if_type):
    headers = {'Accept': 'application/yang-data+json',
               'Content-Type': 'application/yang-data+json'}
    payload = {
            "ietf-interfaces:interface": {
                "name": if_name,
                "enabled": if_status,
                "type": if_type,
                }
            }
    base_url = 'https://192.168.1.1:8443'
    restconf_url = '/restconf/data/ietf-interfaces:interfaces/interface'

    res = requests.put(f'{base_url}{restconf}={if_name}',
                               headers=headers, json=payload,
                                   auth=('cisco', 'secret'), verify=False)
```

Refer to the exhibit. A network engineer wants to automate the port enable/disable process on specific Cisco switches. The engineer creates a script to send a request through RESTCONF and uses ietf as the YANG model and JSON as payload. Which command enables an interface named Loopback1?

A enable_function(Loopback1, true, 'iana-if-type:softwareLoopback') ✓ CORRECT

B enable_function('iana-if-type:softwareLoopback', Loopback1, true,)

C def enable_function('iana-if-type:softwareLoopback', Loopback1, false,)

D def enable_function(Loopback1, true, 'iana-if-type:softwareLoopback')

SUGGESTED ANSWER

The suggested answer is A.

To enable an interface named 'Loopback1', the function enable_function has to be called with appropriate parameters. The correct syntax to call the function would be enabling the interface (true) for 'Loopback1' and specifying the type as 'iana-if-type:softwareLoopback'. Therefore, the command should be enable_function(Loopback1, true, 'iana-if-type:softwareLoopback'), making option A the correct answer.

Issued to kamjunhao@gmail.com · October 17, 2026

An engineer must configure Cisco Nexus devices and wants to automate this workflow. The engineer enables the Cisco NX-OS REST API to configure the devices by using an Ansible playbook. Before running the code, which resource must be used to verify that the code works correctly?

A Cisco NX-OS SDK

B Cisco Learning Labs

C Cisco Code Exchange

D Cisco Modeling Labs ✓ CORRECT

SUGGESTED ANSWER

The suggested answer is D.

To verify that the code works correctly, the engineer should use Cisco Modeling Labs. Cisco Modeling Labs is an on-premise network simulation tool that allows users to simulate both Cisco and non-Cisco networks using real Cisco images. This environment is ideal for testing network automation workflows, including those relying on the Cisco NX-OS REST API, as it provides a safe and controlled space to validate configurations before deploying them on production devices.

Issued to kamjunhao@gmail.com · October 17, 2026

A new application is being developed with specific platform requirements. The platform and application deployment and the ongoing platform management must be fully automated. The application includes a large database component that has significant disk I/O requirements. Which application deployment type meets the requirements?

A Python virtual environment

B virtual machine

C bare metal

D container ✓ CORRECT

SUGGESTED ANSWER

The suggested answer is D.

To meet the requirement of fully automated platform and application deployment with ongoing platform management, containerization is the best option. Containers offer a consistent deployment environment across different platforms and can be easily scaled and managed through orchestration tools like Kubernetes. They are well-suited for applications with significant disk I/O requirements because they can be deployed on infrastructure that meets these performance needs. Additionally, containers facilitate automation and self-healing, important for maintaining high availability and efficiency.

Issued to kamjunhao@gmail.com · October 17, 2026

```
- hosts: servers
  tasks:

  - name: task1
    apt:
      name: apache2
      state: absent

  - name: task2
    apt:
      name: nginx
      state: present

  - name: task3
    apt:
      name: "*"
      state: latest
```

Refer to the exhibit. A developer must check packages on web load balancers that use nginx packages. The developer updates the servers as required in Ansible inventory and prepares an Ansible playbook to automate this workflow on related servers. Which process is being automated by the Ansible playbook?

A verifying that nginx is installed only if apache2 is unavailable on the system, and then updating all the other packages

B verifying, without installing, that apache2 is unavailable and that nginx is installed, and then updating the repository to the latest version

C uninstalling the apache2 server, installing the nginx server, and then updating all the packages to the latest version ✓ CORRECT

D installing nginx, uninstalling apache2, and then verifying that the package repository is at the latest version

SUGGESTED ANSWER

The suggested answer is C.

The Ansible playbook automates the process of uninstalling the apache2 server, installing the nginx server, and then updating all the packages to the latest version. The state: absent directive for apache2 indicates that it will be uninstalled. The state: present directive for nginx indicates that nginx will be installed. The state: latest directive for '*' indicates that all packages will be updated to their latest versions.

Personal copy · kamjunhao@gmail.com

user_manager.py

```
import psycopg2
import json, sys

# Load config file
config = None
with open('config.json') as config_file:
    config = json.load(config_file)
if not config:
    print("Error loading configuration file.")
    sys.exit(1)

connection = psycopg2.connect(
    database="users",
    host=config["DB_USER"], user=config["DB_USER"], password=config["DB_PWD"]
)
connection.set_session()

def has_admin_role(username):
    with connection.cursor() as cursor:
        query = 'SELECT admin_role FROM users WHERE username = {0}'
        cursor.execute(query.format(username))
        result = cursor.fetchone()
    return result

has_admin_role("ops.shared")
```

config.json

```
{
    "DB_USER": "pguser",
    "DB_PWD": "@123Qwer%4",
    "DB_HOST": "devnetdb.example.com"
}
```

Refer to the exhibit. An engineer must check the admin rights of users on a database regularly and prepares the Python script to automate the process. The script connects to the database and runs a query. What is a security issue about the secrets in the code that relates to secret protection?

A They must be stored in configuration files if there is a possibility of leakage.

B They must be Base64-encoded if stored in the user database.

C They must be encrypted if stored in the user database. ✓ CORRECT

D They must be stored in configuration files if no authentication will be used.

SUGGESTED ANSWER

The suggested answer is C.

> The primary security issue about the secrets in the code that relates to secret protection is that they must be encrypted if stored in the user database. Encryption is essential for protecting sensitive data stored at rest and ensuring that it is not easily accessible if the storage is compromised. In this context, storing secrets such as database credentials in plaintext within the user database poses a significant security risk. Base64 encoding is not a sufficient security measure as it does not provide true encryption, merely encoding the data in a different format. Storing them in configuration files without encryption or proper protection mechanisms also does not address the issue fully. Therefore, encrypting the secrets when stored in the user database is the appropriate security measure to mitigate the risk of unauthorized access.

Personal copy · kamjunhao@gmail.com

```
import requests
import json

BASE_URL = "https://<IP Address>"
FIRST_URL = "/dna/intent/api/v1/network-device"
SECOND_URL = "/dna/intent/api/v1/network-device-poller/cli/read-request"
THIRD_URL = "/dna/intent/api/v1/task/{task_id}"
FOURTH_URL = "/dna/intent/api/v1/file/{file_id}"

headers = {"X-Auth-Token": "TOKEN", "Content-Type": "application/json"}

params = {"platformId": "C9500-40X"}
response = requests.get(BASE_URL + FIRST_URL, headers=headers, params=params)
devices = []
for device in response.json()["response"]:
    devices.append(device["id"])

    payload = {
        "commands": ["show version", "show ip int brief"],
        "deviceUuids": devices,
        "timeout": 0,
    }
response = requests.post(BASE_URL + SECOND_URL, data=json.dumps(payload),
headers=headers)
task_id = response.json()["response"]["taskId"]

response = requests.get(BASE_URL + THIRD_URL.format(task_id=task_id),
headers=headers)
progress_json = json.loads(response.json()["response"]["progress"])
file_id = progress_json("fileId")

response = requests.get(BASE_URL + FOURTH_URL.format(file_id=file_id),
headers=headers)
file_json = response.json()

for cmd in file_json:
  print(file_json[cmd]["commandResponses"]["SUCCESS"]["show ip int brief"])
```

Refer to the exhibit. A network engineer must collect information from the network using Cisco DNA Center APIs. The script must query for the devices with

'platformId' 'C9540-x' and then send commands to be executed. Which process is automated by the Python script?

A results gathering of the show version and show ip int brief commands ✓ CORRECT

B output of show ip int brief command on devices of type C9500-40X

C execution information of the show version and show ip int brief commands

D list of executed commands on C9500-40X and the information of show ip int brief command

SUGGESTED ANSWER

The suggested answer is A.

The script is designed to gather the results of the 'show version' and 'show ip int brief' commands from devices with 'platformId' 'C9500-40X'. It first requests a list of device IDs matching the specified platform ID, then sends commands to these devices, waits for the task to be completed, and finally retrieves the results of the commands. This indicates that the focus of the process is on gathering the results of both commands, making A the correct answer.

Personal copy · kamjunhao@gmail.com

```
diff --git a/ciscoaxl/axl.py b/ciscoaxl/axl.py
index bc7727e..d66ef4d 100644
--- a/ciscoaxl/axl.py
+++ b/ciscoaxl/axl.py
@@ -99,7 +99,7 @@ class axl(object):
          :return: result dictionary
          """
          try:
-             return self.client.executeSQLUpdate(query)
+             return self.client.executeSQLUpdate(query)['return']
          except Fault as e:
              return e

diff --git a/setup.py b/setup.py
index df79ef4..1470b05 100644
--- a/setup. py
+++ b/setup. py
@@ -5,7 +5,7 @@ with open("README.md", "r") as fh:

 setup(
     name="ciscoaxl",
-    version="0.14",
+    version"0.141",
     author="User 1",
     author_email= "user1@example.com",
     description="Cisco CUCM AXL Library. Simple to use.",
```

Refer to the exhibit. Which two files are being edited in the unified diff? (Choose two.)

A README.md

B setup.py ✓ CORRECT

C axl.py ✓ CORRECT

D ciscoaxl.py

E index.py

SUGGESTED ANSWER

The suggested answer is B, C.

> The exhibit shows a unified diff between two files. The first diff shown is between 'a/ciscoaxl/axl.py' and 'b/ciscoaxl/axl.py', indicating that 'axl.py' is one of the edited files. The second diff is between 'a/setup.py' and 'b/setup.py', indicating that 'setup.py' is the other edited file.

Personal copy · kamjunhao@gmail.com

DRAG DROP -

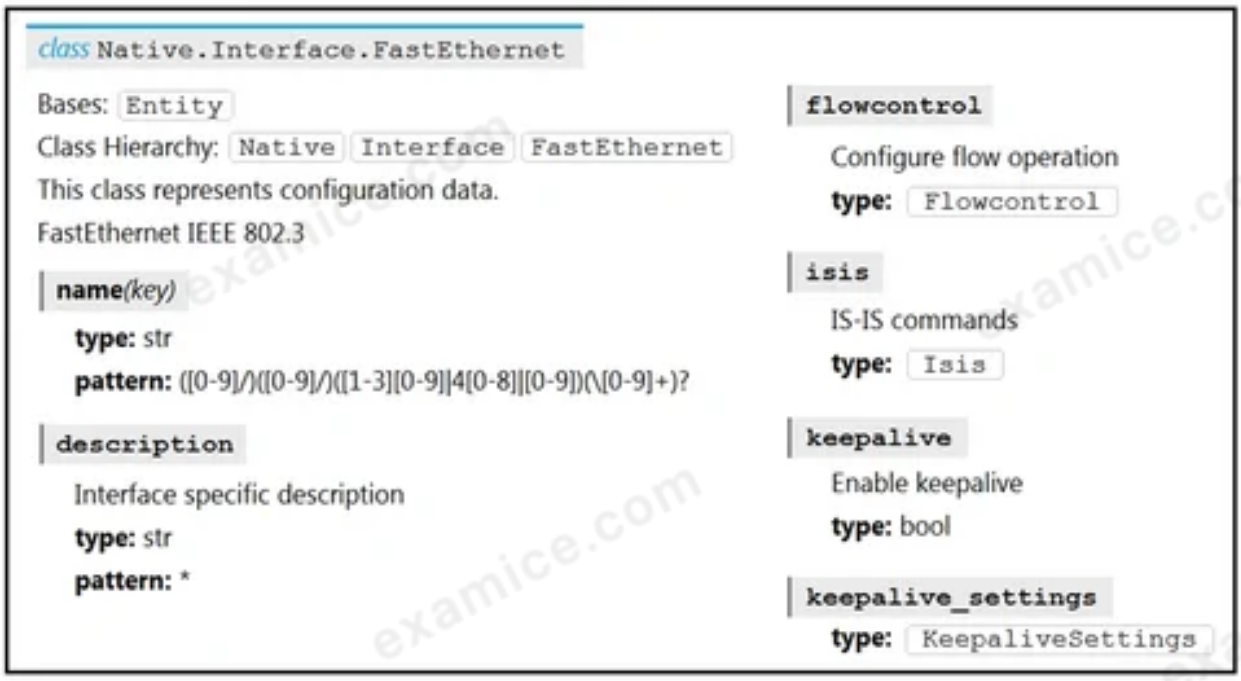

Refer to the exhibit. Drag and drop the code snippets from the bottom to the blanks in the code to enable keepalive for the FastEthernet 2/0 interface. Not all options are used.

Select and Place:

```
from ydk.services import CRUDService
from ydk.providers import NetconfServiceProvider as nc
from ydk.models.cisco_ios_xe import Cisco_IOS_XE_native as model
ip = '10.10.20.48'
prtcl = 'ssh'
user = 'developer'
psw = 'P@s$W0rD'
port = 830
provider = nc(address=ip, port=port, username=user, password=psw, protocol=prtcl)
crud = CRUDService()
[                                                    ]
interface.name = '2/0'
[                                                    ]
[                                                    ]
if interface_data:
    print('Keepalive is enabled.')
else:
    print('Keepalive is not enabled.')
```

```
interface_data = crud.update(provider, interface)
interface.keepalive = True
interface_data = crud.read(provider, interface)
interface = model.Native.Interface.FastEthernet()
interface.FastEthernet.keepalive_settings.keepalive = True
interface = model.Native.Interface()
```

SUGGESTED ANSWER

```
from ydk.services import CRUDService
from ydk.providers import NetconfServiceProvider as nc
from ydk.models.cisco_ios_xe import Cisco_IOS_XE_native as model
ip = '10.10.20.48'
prtcl = 'ssh'
user = 'developer'
psw = 'P@s$W0rD'
port = 830
provider = nc(address=ip, port=port, username=user, password=psw, protocol=prtcl)
crud = CRUDService()
interface = model.Native.Interface.FastEthernet()
interface.name = '2/0'
interface.keepalive = True
interface_data = crud.read(provider, interface)
if interface_data:
    print('Keepalive is enabled.')
else:
    print('Keepalive is not enabled.')
```

```
interface_data = crud.update(provider, interface)
```

```
interface.FastEthernet.keepalive_settings.keepalive = True
```

```
interface = model.Native.Interface()
```

Issued to kamjunhao@gmail.com · October 17, 2026

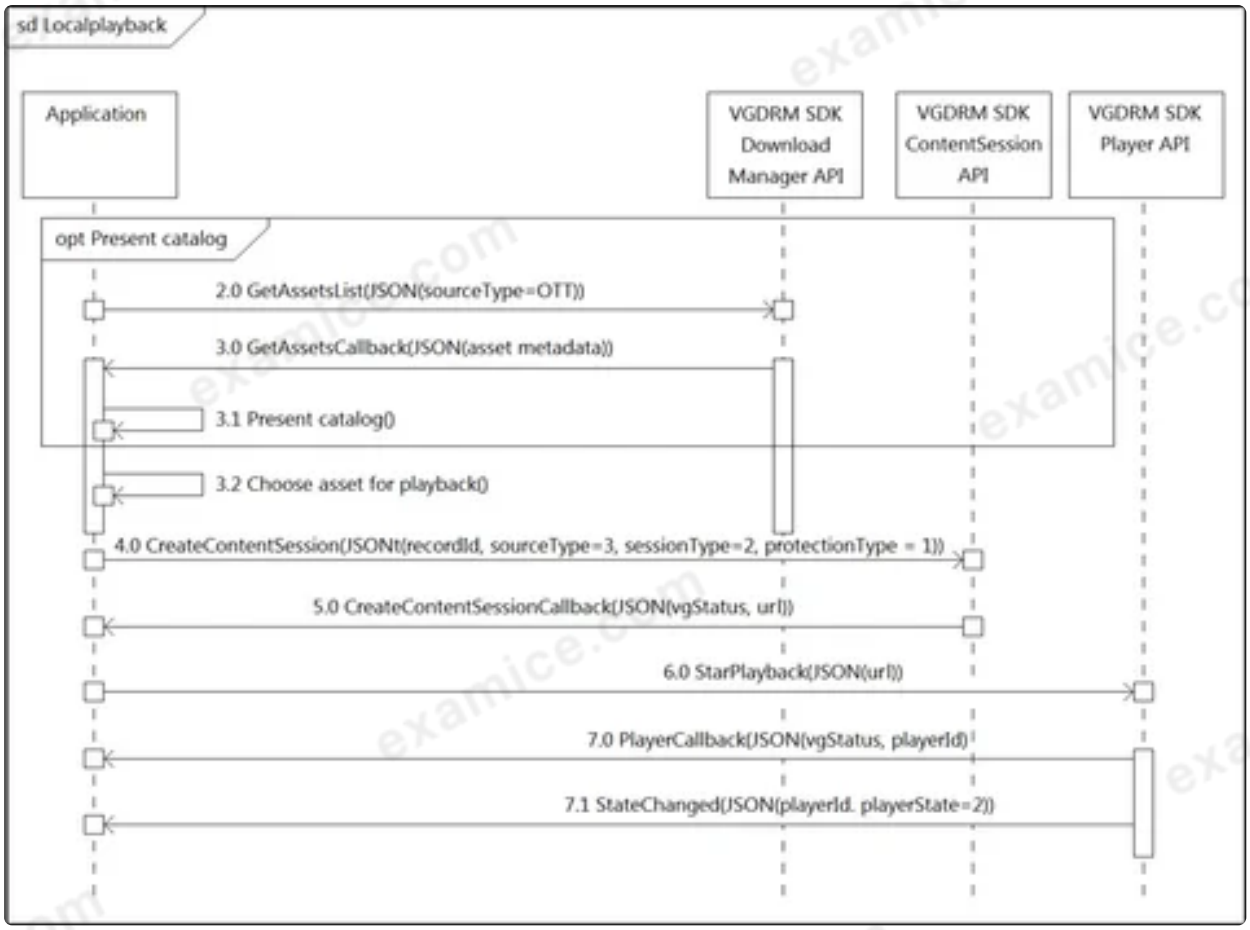

Refer to the exhibit. What do all the calls shown in the sequence diagram have in common?

A All the calls are optional.

B All the calls are asynchronous. ✓ CORRECT

C All the calls are synchronous.

D All the calls depend on the catalog.

SUGGESTED ANSWER

The suggested answer is B.

The calls shown in the sequence diagram are all asynchronous. This is inferred from the use of line arrowheads for the messages, which denote asynchronous communication, as opposed to solid arrowheads used for synchronous messages. Asynchronous messages

> allow the calling process to continue executing without waiting for the called method to complete.

Personal copy · kamjunhao@gmail.com

```
<routing xmlns="urn:ietf:params:xml:ns:yang:ietf-routing">
    <routing-instance>
        <name>default</name>
        <description>default-vrf [read-only]</description>
        <routing-protocols>
            <routing-protocol>
                <type xmlns:ospf="urn:ietf:params:xml:ns:yang:ietf-
                ospf">ospf:ospfv2</type>
                <name>100</name>
                <ospf xmlns="urn:ietf:params:xml:ns:yang:ietf-ospf">
                    <instance>
                        <af xmlns:rt="urn:ietf:params:xml:ns:yang:ietf-
                        routing">rt:ipv4</af>
                        <router-id>1.1.1.1</router-id>
                        <nsr>
                            <enable>false</enable>
                        </nsr>
                        <auto-cost>
                            <enable>false</enable>
                        </auto-cost>
                        <redistribution
                        xmlns="urn:ietf:params:xml:ns:yang:cisco-ospf">
                            <rip/>
                        </redistribution>
                    </instance>
                </ospf>
            </routing-protocol>
        </routing-protocols>
    </routing-instance>
</routing>
```

Refer to the exhibit. What are two characteristics of the NETCONF response? (Choose two.)

A ospf is defined by the ietf-ospf module. ✓ CORRECT

B ietf-ospf imports ietf-routing. ✓ CORRECT

C redistribution is a module of type cisco-ospf.

D routing protocols is a list.

E The main module is routing.

SUGGESTED ANSWER

The suggested answer is A, B.

The NETCONF response displays characteristics of defined modules and their interrelationships. The 'ospf' is defined by the 'ietf-ospf' module, as indicated in the XML

structure under the 'ospf' tag. Additionally, 'ietf-ospf' imports 'ietf-routing,' evidenced by the usage of the prefix 'rt' under the 'af' tag, which indicates that elements from the 'ietf-routing' namespace are being referenced within the 'ietf-ospf' module. Therefore, the correct characteristics of the NETCONF response are that 'ospf' is defined by the 'ietf-ospf' module, and 'ietf-ospf' imports 'ietf-routing.'

QUESTION 228

Issued to kamjunhao@gmail.com · October 17, 2026

A business needs to create a simulated environment that mimics a production infrastructure to make changes to the **OSPF** process and analyze the impact. What should be used?

A Cisco VIRL / Cisco CML ✓ CORRECT

B Cisco DevNet Sandbox labs

C pyATS

D Puppet

SUGGESTED ANSWER

The suggested answer is A.

To create a simulated environment that mimics a production infrastructure for making changes to the OSPF process and analyzing the impact, Cisco VIRL (Virtual Internet Routing Lab) or Cisco CML (Cisco Modeling Labs) is the appropriate tool. Cisco VIRL/CML allows for the creation of virtual network environments that accurately represent physical network topologies and behaviors, making it suitable for testing and experimenting with network configurations in a controlled environment. This helps in understanding the impact of changes before applying them to a live production network.

Issued to kamjunhao@gmail.com · October 17, 2026

What is a benefit of a CI/CD pipeline for infrastructure?

A removes manual errors ✓ CORRECT

B enables manual steps

C removes the need for operations

D provides variety for deployments

SUGGESTED ANSWER

The suggested answer is A.

A CI/CD (Continuous Integration/Continuous Deployment) pipeline for infrastructure automates the process of deploying and managing infrastructure, thereby removing manual errors. Automation ensures consistency and reduces the potential for human error, which is a significant benefit for infrastructure management.

Issued to kamjunhao@gmail.com · October 17, 2026

During which step of the CI/CD pipeline for infrastructure automation is code from multiple developers combined to compile and test different components?

A integration ✓ CORRECT

B deployment

C development

D testing

SUGGESTED ANSWER

The suggested answer is A.

In the CI/CD pipeline for infrastructure automation, the step where code from multiple developers is combined to compile and test different components is known as 'integration'. This step ensures that the code changes from various developers work together correctly. Compilation and initial testing often occur during this phase to catch any integration issues early.

```
import requests

url = "https://api.meraki.com/api/v0/organizations/{{organizationId}}/insight/
monitoredMediaServers"

payload = {
    "name": "Sample VoIP Provider",
    "address": "123.123.123.1"
}
headers = {
  'Accept': '*/*',
  'Content-Type': 'application/json'
}

response = requests.request("POST", url, headers=headers, data=payload)

print(response.text.encode('utf8'))
```

Refer to the exhibit. Which workflow does the script automate?

A retrieves a media server that is being monitored

B updates a media server that is being monitored

C adds a media server to be monitored ✓ CORRECT

D deletes a media server that is being monitored

SUGGESTED ANSWER

The suggested answer is C.

The script is using the HTTP POST method to send data to the server. In RESTful services, the POST method is typically used to create a new resource. The script sends a payload with a name and address, which indicates the intention to add a new media server to be monitored. Thus, the correct workflow that the script automates is adding a media server to be monitored.

Issued to kamjunhao@gmail.com · October 17, 2026

Which description of a default gateway is true?

A It is a security feature that denies certain traffic.

B It is a device that receives IP packets that have no explicit next-hop in the routing table. ✓ CORRECT

C It is a feature that translates between public and private addresses.

D It is a device that receives Layer 2 frames with an unknown destination address.

SUGGESTED ANSWER

The suggested answer is B.

A default gateway is a device, typically a router, that receives IP packets which do not have a specified next hop in the routing table. When a device wants to communicate with an IP address that is not within its local subnet, it sends the packet to the default gateway. The default gateway then forwards the packet to the appropriate destination based on its routing table.

Issued to kamjunhao@gmail.com · October 17, 2026

On which port does **NETCONF** operate by default?

A 23

B 443

C 822

D 830 ✓ CORRECT

SUGGESTED ANSWER

The suggested answer is D.

NETCONF (Network Configuration Protocol) operates by default on TCP port 830. This standard is defined to facilitate the management and configuration of network devices, typically over a secure connection using SSH.

Issued to kamjunhao@gmail.com · October 17, 2026

Which device is a system that monitors and controls incoming and outgoing network traffic based on predetermined security roles?

A router

B switch

C load balancer

D firewall ✓ CORRECT

SUGGESTED ANSWER

The suggested answer is D.

A firewall is a system that monitors and controls incoming and outgoing network traffic based on predetermined security rules. Its main function is to block unauthorized access while permitting authorized communications. Neither a router, switch, nor load balancer performs this specific function.

Issued to kamjunhao@gmail.com · October 17, 2026

In DNS, which record specifies an alias that refers to another name that ultimately resolves to an IP address?

A CNAME ✓ CORRECT

B NS

C AAA

D SOA

SUGGESTED ANSWER

The suggested answer is A.

In DNS (Domain Name System), the CNAME record (Canonical Name) specifies an alias that refers to another domain name. This domain name will eventually resolve to an IP address. CNAME records are particularly useful when you want to point multiple domain names to the same IP address so that if the IP address changes, only the target of the CNAME record needs to be updated.

DRAG DROP -

Drag and drop the network component names from the left onto the correct descriptions on the right. Not all options are used.

Select and Place:

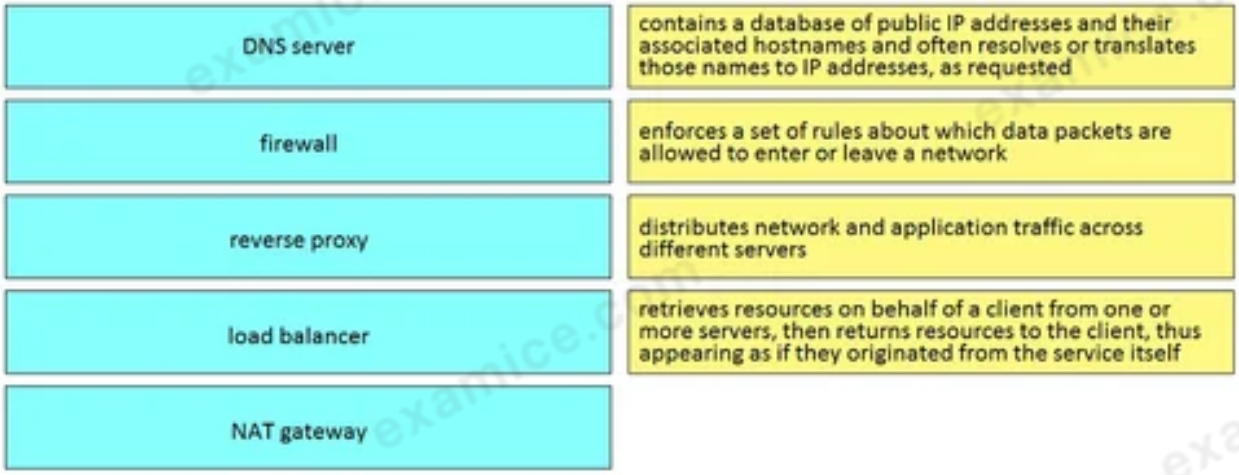

SUGGESTED ANSWER

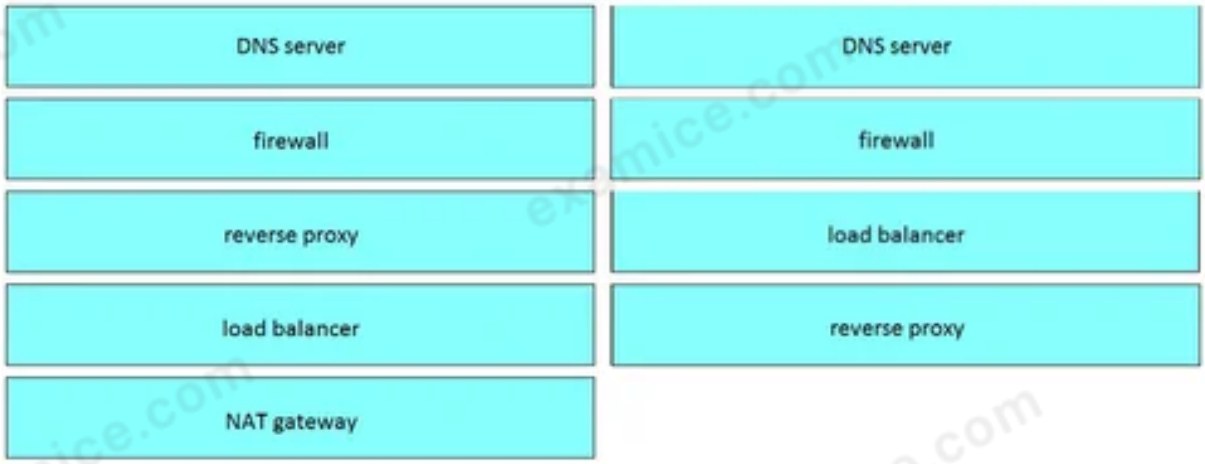

Which two types of NAT are used in a network? (Choose two.)

A routed NAT

B static NAT ✓ CORRECT

C multicast NAT

D normal NAT

E dynamic NAT ✓ CORRECT

SUGGESTED ANSWER

The suggested answer is B, E.

Static NAT and dynamic NAT are the two common types of Network Address Translation (NAT) used in networks. Static NAT creates a one-to-one mapping between a local IP address and a global IP address, allowing an inside host to be consistently reachable at a specific, predefined address. Dynamic NAT, on the other hand, assigns a local IP address to a pool of global IP addresses, allowing multiple internal devices to access external networks using a shared set of public IP addresses. These are the standard types defined in network configuration practices.

examice.com

Issued to kamjunhao@gmail.com · October 17, 2026

What is the purpose of a MAC address?

A to uniquely identify a switch in a LAN

B to uniquely identify a router in a LAN

C to uniquely identify a network interface in a LAN ✓ CORRECT

D to uniquely identify a device on the Internet

SUGGESTED ANSWER

The suggested answer is C.

A MAC address uniquely identifies a network interface in a LAN. It is a hardware address that is burned into the network interface card (NIC) by the manufacturer. This address helps in local network communication and does not propagate to the internet, as it is used within the data link layer (Layer 2) of the OSI model.

Refer to the exhibit.

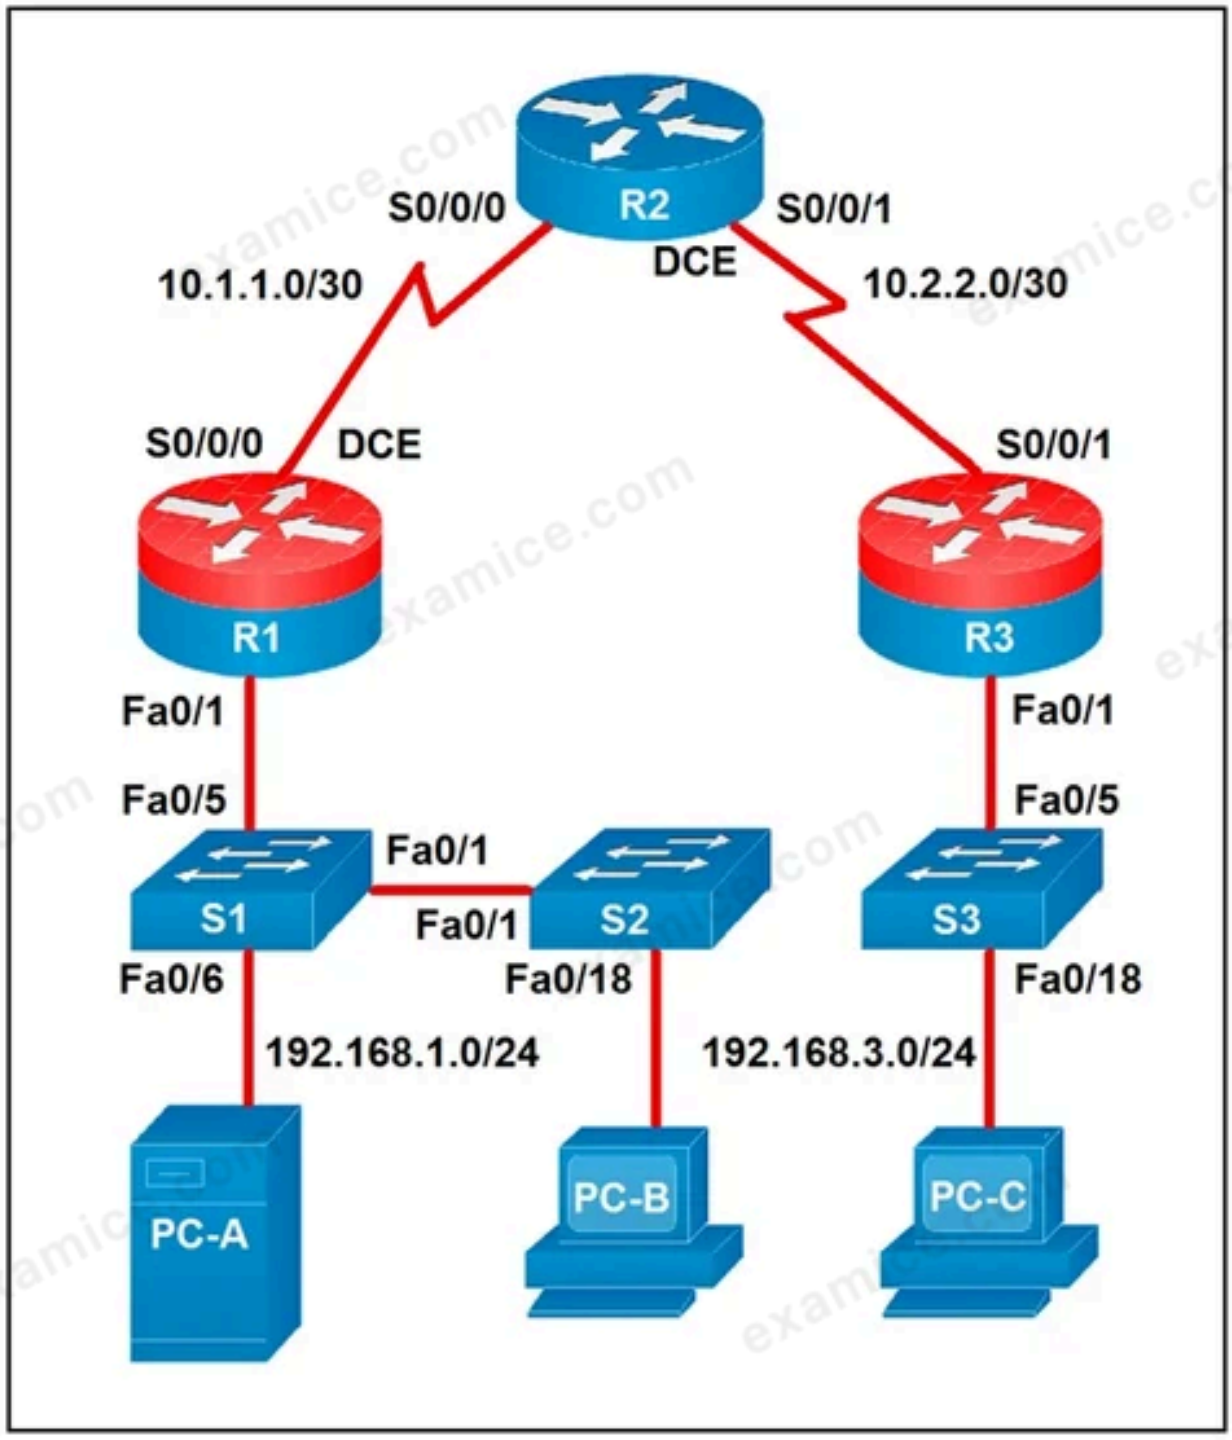

Which two statements about the network diagram are **true?** (Choose two.)

A The subnet address of PC-B has 18 bits dedicated to the network portion. ✓ CORRECT

B One of the routers has two connected serial interfaces. ✓ CORRECT

C R1 and R3 are in the same subnet.

D PC-A and PC-B are in the same subnet.

E The subnet of PC-C can contain 256 hosts.

SUGGESTED ANSWER

The suggested answer is A, B.

One of the routers has two connected serial interfaces, which is clearly shown in the diagram, making it a correct statement. The subnet address of PC-B, given as 192.168.3.0/24, has 24 bits dedicated to the network portion, not 18 bits, so this option is actually incorrect. However, another valid option is missing, therefore the most logical option considering the supplied illustration is that PC-A and PC-B are in different subnets, as suggested by their IP address ranges 192.168.1.0/24 and 192.168.3.0/24, respectively. Thus, the best logical answer based on the given information would be that one router has two connected serial interfaces. The other valid statement could focus on the Subnets used.

Personal copy · kamjunhao@gmail.com

DRAG DROP -

Drag and drop the network automation interfaces from the left onto the transport protocols that they support on the right. Not all options are used.

Select and Place:

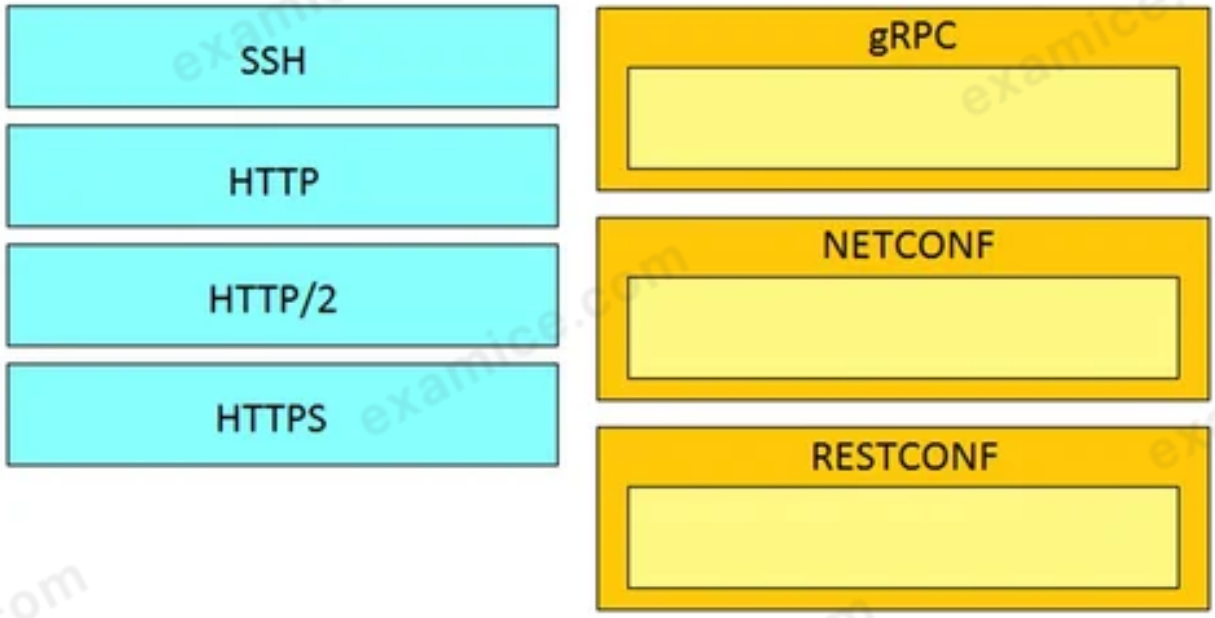

SUGGESTED ANSWER

Reference:
https://www.ciscolive.com/c/dam/r/ciscolive/apjc/docs/2017/pdf/BRKSDN-2119.pdf slide 49

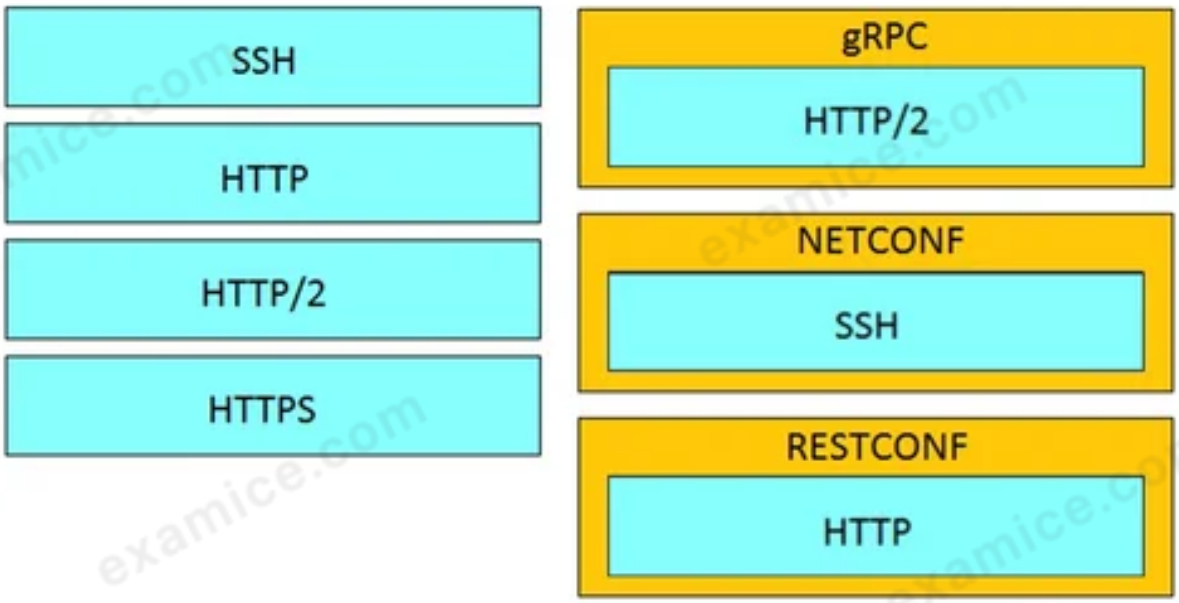

QUESTION 241

Issued to kamjunhao@gmail.com · October 17, 2026

Which detail is included in a routing table?

A broadcast address

B TCP or UDP port number

C IP protocol

D destination next hop or outgoing interface ✓ CORRECT

SUGGESTED ANSWER

The suggested answer is D.

A routing table includes the detail of the destination next hop or outgoing interface. This information is essential for determining the best path for packet forwarding in a network. The other options, such as broadcast address, TCP or UDP port number, and IP protocol, do not serve the purpose of routing decisions directly.

Issued to kamjunhao@gmail.com · October 17, 2026

What is an example of a network interface hardware address?

A workstation name

B IP address

C domain name

D MAC address ✓ CORRECT

SUGGESTED ANSWER

The suggested answer is D.

A network interface hardware address is commonly known as a MAC address (Media Access Control address). Other options such as workstation name, IP address, and domain name do not refer to hardware addresses. A MAC address is a unique identifier assigned to network interfaces for communications at the data link layer of a network segment.

DRAG DROP -

Drag and drop the functionalities from the left onto the correct networking devices on the right.

Select and Place:

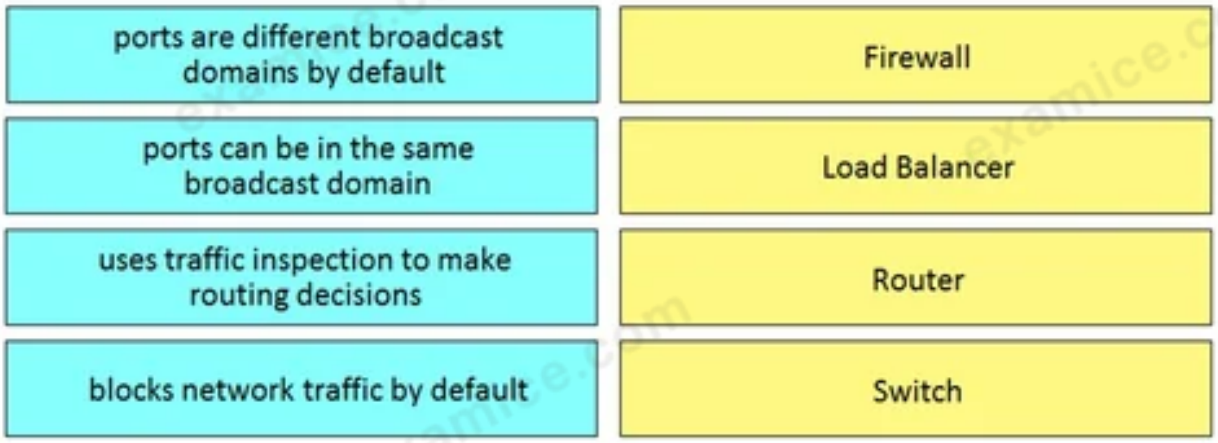

SUGGESTED ANSWER

Reference:
https://geek-university.com/ccna/broadcast-domain-explained/

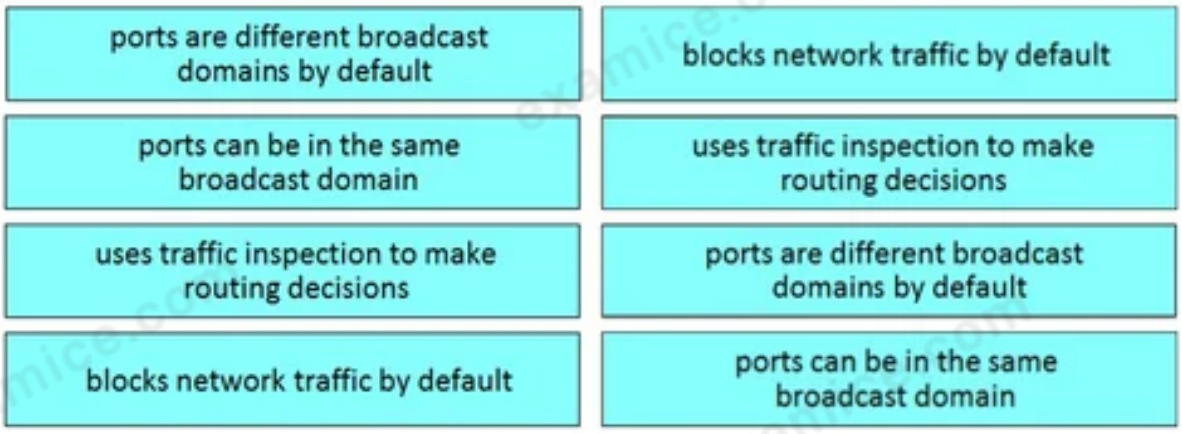

Issued to kamjunhao@gmail.com · October 17, 2026

On which network plane is routing protocol traffic handled?

A management plane

B data plane

C authentication plane

D control plane ✓ CORRECT

SUGGESTED ANSWER

The suggested answer is D.

Routing protocol traffic is handled on the control plane. The control plane is responsible for the routing table, exchanging routing information, and making decisions about the best paths for data flow through the network. It is distinct from the data plane, which forwards actual user data based on the control plane's instructions.

Issued to kamjunhao@gmail.com · October 17, 2026

Which device is used to transport traffic from one broadcast domain to another broadcast domain?

A layer 2 switch

B proxy server

C router ✓ CORRECT

D load balancer

SUGGESTED ANSWER

The suggested answer is C.

A router is the correct device used to transport traffic from one broadcast domain to another broadcast domain. Broadcast domains are separated by routers, which route packets between different networks or subnets, ensuring that broadcast traffic does not propagate beyond a single network. While layer 2 switches, proxy servers, and load balancers serve important functions in a network, they do not provide the necessary functionality to separate or route traffic between broadcast domains.

Issued to kamjunhao@gmail.com · October 17, 2026

Which service provides a directory lookup for IP addresses and host names?

A DNS ✓ CORRECT

B NAT

C SNMP

D DHCP

SUGGESTED ANSWER

The suggested answer is A.

DNS (Domain Name System) is the service that provides a directory lookup for IP addresses and host names. It translates human-friendly domain names (like www.example.com) into IP addresses (like 192.0.2.1), allowing devices to locate and connect to each other on the internet.

Users cannot access a webserver and after the traffic is captured, the capture tool shows an ICMP packet that reports "time exceeded in-transit". What is the cause of this webserver access issue?

A A router along the path has the wrong time.

B A router along the path is misrouting the packets in a wrong direction. ✓ CORRECT

C The server is too loaded and the connection could not be handled in time.

D The server is too far away and the packets require too much time to reach it.

SUGGESTED ANSWER

The suggested answer is B.

The message 'time exceeded in-transit' indicates that the Time to Live (TTL) field of an IP packet has expired. The TTL field is used to prevent packets from looping infinitely in the network; it is decremented by each router the packet passes through. When the TTL value reaches zero, the packet is discarded, and an ICMP 'time exceeded' message is sent back to the sender. This typically happens when there is a routing loop or the packet is taking a longer path than expected, which points to a misrouting issue along the path. Hence, a router along the path misrouting the packets in a wrong direction is the most plausible reason for this issue.

Issued to kamjunhao@gmail.com · October 17, 2026

What is used in Layer 2 switches to direct packet transmission to the intended recipient?

A MAC address ✓ CORRECT

B IPv6 address

C spanning tree

D IPv4 address

SUGGESTED ANSWER

The suggested answer is A.

Layer 2 switches use MAC addresses to direct packet transmission to the intended recipient. The MAC address operates at the data link layer (Layer 2) of the OSI model, enabling switches to efficiently forward packets to the correct device within the network.

Issued to kamjunhao@gmail.com · October 17, 2026

What is the purpose of a firewall in application deployment?

A adds TLS support to an application that does not support it natively

B limits traffic to only ports required by the application ✓ CORRECT

C provides translation for an application's hostname to its IP address

D forwards traffic to a pool of instances of the application

SUGGESTED ANSWER

The suggested answer is B.

A firewall in application deployment limits traffic to only ports required by the application. Its main purpose is to enhance security by controlling incoming and outgoing network traffic based on predetermined security rules, thereby mitigating unauthorized access and potential threats. This helps in ensuring that only legitimate traffic can reach the application.

Issued to kamjunhao@gmail.com · October 17, 2026

A small company has 5 servers and 50 clients. What are two reasons an engineer should split this network into separate client and server subnets? (Choose two.)

A Subnets will split domains to limit failures. ✓ CORRECT

B A router will limit the traffic types between the clients and servers. ✓ CORRECT

C Subnets provide more IP address space for clients and servers.

D A router will bridge the traffic between clients and servers.

E Internet access to the servers will be denied on the router.

SUGGESTED ANSWER

The suggested answer is A, B.

Splitting the network into separate client and server subnets helps limit failures to specific domains. This means if one subnet experiences an issue, the other subnet can continue functioning without interruption. Additionally, a router can limit the types of traffic between subnets. For example, it can restrict broadcast and multicast traffic, thereby reducing unnecessary load and potential congestion on the network.

Issued to kamjunhao@gmail.com · October 17, 2026

What is the function of an `IP` address in networking?

A represents a network connection on specific devices

B specifies the type of traffic that is allowed to roam on a network

C specifies resource's location and the mechanism to retrieve it

D represents the unique ID that is assigned to one host on a network ✓ CORRECT

SUGGESTED ANSWER

The suggested answer is D.

An IP address represents the unique ID that is assigned to one host on a network. It is used to identify and locate devices within a network and enables communication between them.

Issued to kamjunhao@gmail.com · October 17, 2026

Where is an IP packet routed if the packet does not match any routes in the routing table?

A firewall

B load balancer

C central switch

D default gateway ✓ CORRECT

SUGGESTED ANSWER

The suggested answer is D.

If an IP packet does not match any routes in the routing table, it is routed to the default gateway. The default gateway is a route used when no other route matches the destination IP address of a packet. This is a standard practice in network routing to ensure there is a defined path for packets that do not have a specific route.

Issued to kamjunhao@gmail.com · October 17, 2026

Which two query types does a client make to a DNS server? (Choose two.)

A Inverse

B PTR ✓ CORRECT

C AAAA ✓ CORRECT

D ACK

E DISCOVER

SUGGESTED ANSWER

The suggested answer is B, C.

Clients typically make different types of queries to a DNS server to resolve domain names. PTR (Pointer) is used to perform a reverse DNS lookup, mapping an IP address back to a domain name. AAAA (quad-A) records are used to resolve a domain name to an IPv6 address. These are common query types a client would use when interacting with a DNS server in a network environment.

Issued to kamjunhao@gmail.com · October 17, 2026

What are two functions of a routing table on a network device? (Choose two.)

A It lists the routes to drop traffic.

B It lists the routes to a particular destination. ✓ CORRECT

C It lists the static and dynamic entries. ✓ CORRECT

D It lists hosts that are one hop away.

E It lists entries more than two hops away.

SUGGESTED ANSWER

The suggested answer is B, C.

A routing table is utilized to list the routes to a particular destination, which allows the network device to determine the best path for data packets to reach their target. Furthermore, it includes both static and dynamic entries, providing information about the routes learned through static configuration and dynamic routing protocols. These functions are essential for efficient network communication and management.

Issued to kamjunhao@gmail.com · October 17, 2026

What does a load balancer distribute in a network environment?

A different TCP connections to the routers

B incoming traffic across multiple servers ✓ CORRECT

C traffic in the network by leveraging the switch architecture

D outgoing connections to the network

SUGGESTED ANSWER

The suggested answer is B.

A load balancer distributes incoming traffic across multiple servers to ensure no single server becomes overwhelmed. It helps to improve the responsiveness and availability of applications by distributing the load in an efficient manner.

Refer to the exhibit.

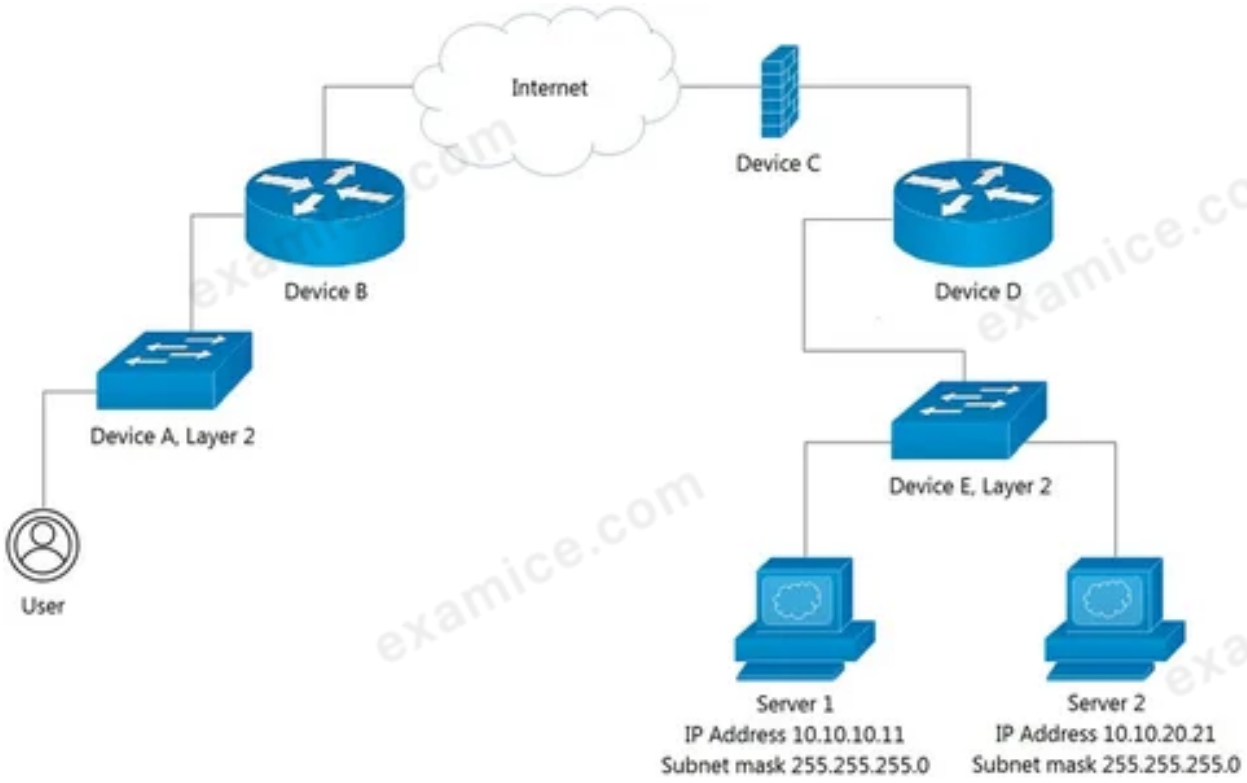

Which Device limits traffic between **Server 1** and **Server 2**?

A Device B

B Device C

C Device D ✓ CORRECT

D Device E

SUGGESTED ANSWER

The suggested answer is C.

Device D is the device that limits traffic between Server 1 and Server 2. This is because Server 1 and Server 2 are on different subnets (10.10.10.0/24 and 10.10.20.0/24, respectively). Routers, such as Device D, are designed to direct traffic between different subnets, thus serving as the gateway for communication between these servers. Without the router, packets from one subnet would not reach the other, thereby limiting traffic. This function

cannot be performed by Layer 2 switches like Device E, which operate within a single broadcast domain and cannot route traffic between different subnets.

QUESTION 257

What is the purpose of a MAC address on a network device?

A unique network address that identifies the network interface of a device

B unique network interlace address that is provided by the DHCP server

C unique hardware address that identifies the network interface of a device ✓ CORRECT

D unique hardware interface address that is provided by the central switch

SUGGESTED ANSWER

The suggested answer is C.

A MAC address is a unique hardware address that identifies the network interface of a device. It is assigned by the manufacturer of the network interface card (NIC) and is used for communication on the local network segment.

How are load balancers used in modern application deployments?

A Turn off traffic and take down compute units, then update and bring the compute units back up.

B Allow traffic to continue as new compute units are brought up and old compute units are taken down.

C Allow HTTP and HTTPS traffic to continue as old compute units are discontinued before new units are brought up.

D Bring up new compute units, test the compute units, and switch the traffic from old units to new units. ✓ CORRECT

SUGGESTED ANSWER

The suggested answer is D.

In modern application deployments, load balancers are used to ensure high availability and reliability by distributing incoming traffic across multiple compute units. The most effective practice involves bringing up new compute units (often running updated versions of the application), testing them to ensure functionality and performance, and then gradually switching the traffic from the old units to the new ones. This approach minimizes downtime and potential disruptions to ongoing user activities, ensuring continuous service delivery.

examice.com

Issued to kamjunhao@gmail.com · October 17, 2026

Which protocol **must** be allowed on the firewall so that NTP services work properly?

A TCP

B ICMP

C BGP

D UDP ✓ CORRECT

SUGGESTED ANSWER

The suggested answer is D.

Network Time Protocol (NTP) uses the User Datagram Protocol (UDP) as its transport protocol. To ensure that NTP services work properly, the firewall must allow UDP traffic, specifically on port 123, which is the standard port for NTP. TCP, ICMP, and BGP are associated with other types of network services and protocols, not NTP.

Issued to kamjunhao@gmail.com · October 17, 2026

Which protocol runs over TCP port 22?

A SSH ✓ CORRECT

B NETCONF

C HTTP

D Telnet

SUGGESTED ANSWER

The suggested answer is A.

SSH runs over TCP port 22. This is a secure shell protocol used for secure remote login and other secure network services over an unsecured network.

Issued to kamjunhao@gmail.com · October 17, 2026

What is the purpose of the first three pairs of digits in a MAC address?

A defines packet forwarding priority sent or received by the adapter

B defines a routing identifier for the client

C indicates vendor of the network card or adapter ✓ CORRECT

D indicates the IP address of the client in Hex

SUGGESTED ANSWER

The suggested answer is C.

The first three pairs of digits in a MAC address indicate the vendor or manufacturer of the network card or adapter. Each manufacturer is assigned a unique identifier called an Organizationally Unique Identifier (OUI) which occupies the first three pairs of digits in the MAC address.

Issued to kamjunhao@gmail.com · October 17, 2026

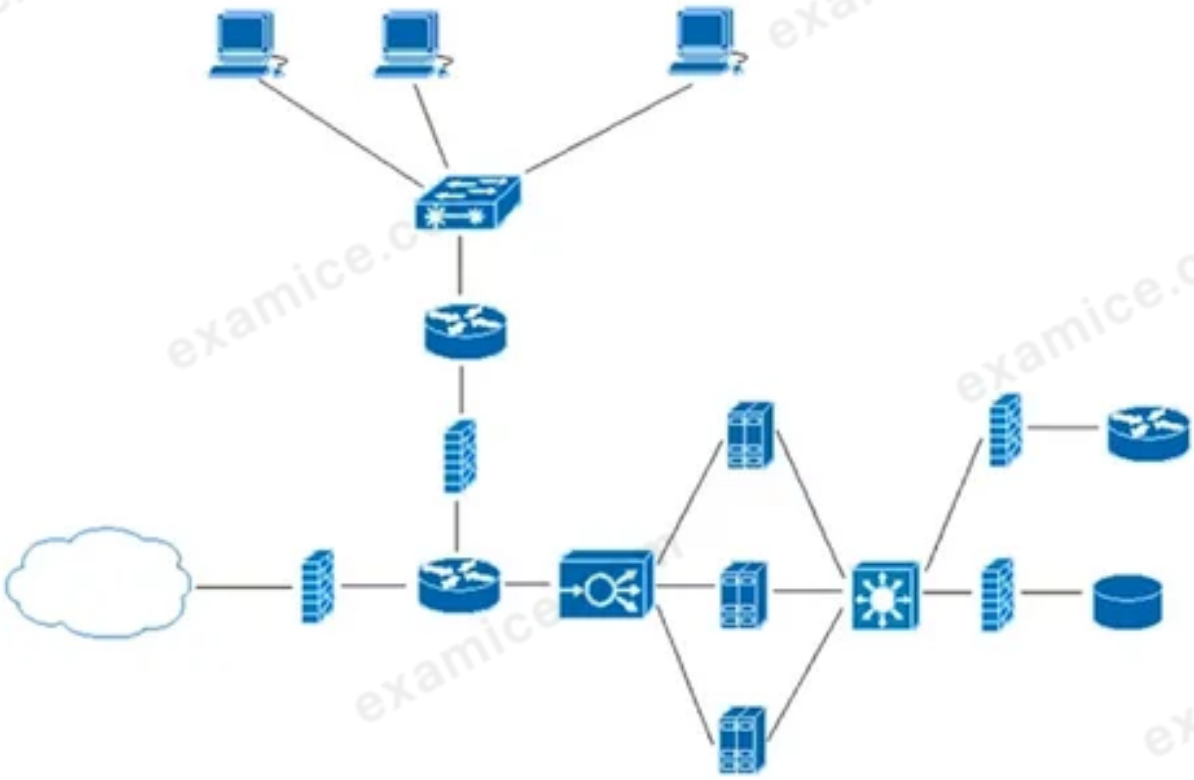

Refer to the exhibit. What does the load balancer enable in the network topology?

A hosted application to access Internet services

B external requests to be routed to the application servers ✓ CORRECT

C application to access the database server

D workstations to access the Internet

SUGGESTED ANSWER

The suggested answer is B.

The load balancer in the network topology is designed to distribute incoming network traffic across multiple servers, ensuring no single server becomes overwhelmed with too many requests. This setup optimizes resource use, maximizes throughput, and minimizes response time. Therefore, the load balancer enables external requests to be routed to the application servers, improving the efficiency and reliability of the application being hosted.

QUESTION 263

Issued to kamjunhao@gmail.com · October 17, 2026

What are two benefits of using VLANs? (Choose two.)

A limits the devices that can join the network

B enables the logical grouping of devices that belong to different Layer 2 devices ✓ CORRECT

C segments the broadcast domain ✓ CORRECT

D allows all network devices to be accessible from any host on the network

E extends the broadcast domain

SUGGESTED ANSWER

The suggested answer is B, C.

Using VLANs enables the logical grouping of devices that belong to different Layer 2 devices, as devices on different physical networks can be grouped into the same VLAN. Additionally, VLANs segment the broadcast domain, meaning each VLAN operates as a separate broadcast domain, reducing overall traffic and improving network efficiency.

Issued to kamjunhao@gmail.com · October 17, 2026

What are two considerations when selecting the `best route` for a network device to reach its destination? (Choose two.)

A MAC address

B IP address

C metrics ✓ CORRECT

D administrative distance ✓ CORRECT

E subnet mask

SUGGESTED ANSWER

The suggested answer is C, D.

The primary considerations when selecting the best route for a network device to reach its destination are administrative distance and metrics. Administrative distance indicates the trustworthiness of a route source and helps in determining which route should be preferred if multiple routes to the same destination exist. Metrics, on the other hand, are used to assess the cost of a route, where lower metrics denote more preferable routes. These two considerations are crucial in the route selection process.

DRAG DROP -

Drag and drop the function on the left onto the type of plane that handles the function on the right.

Select and Place:

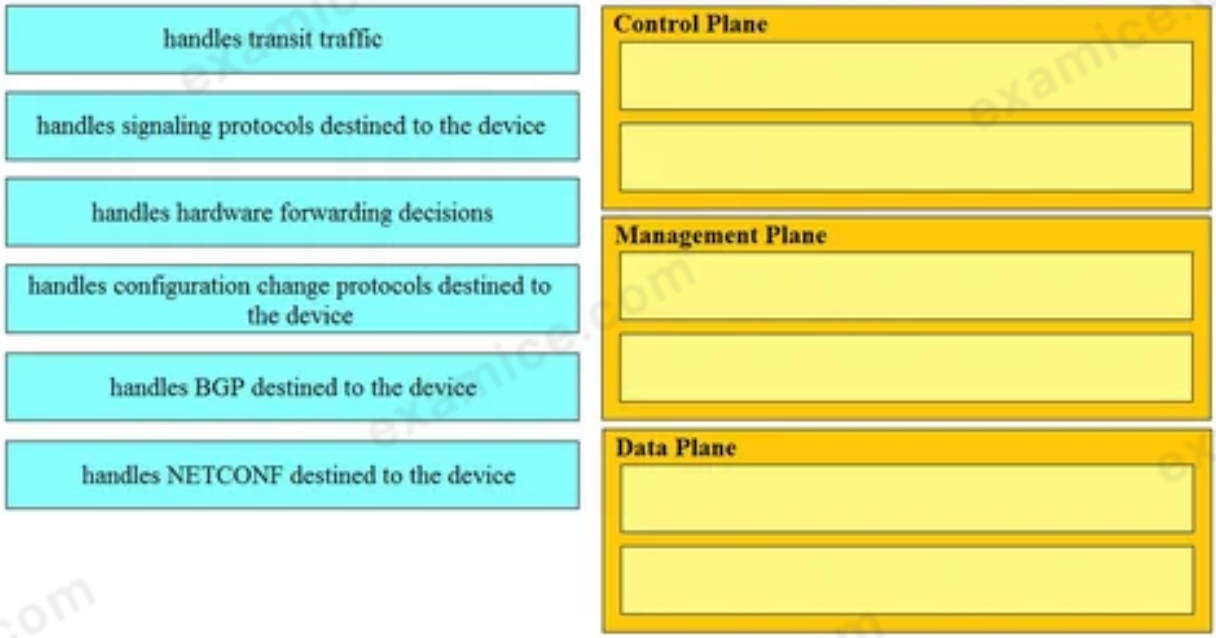

SUGGESTED ANSWER

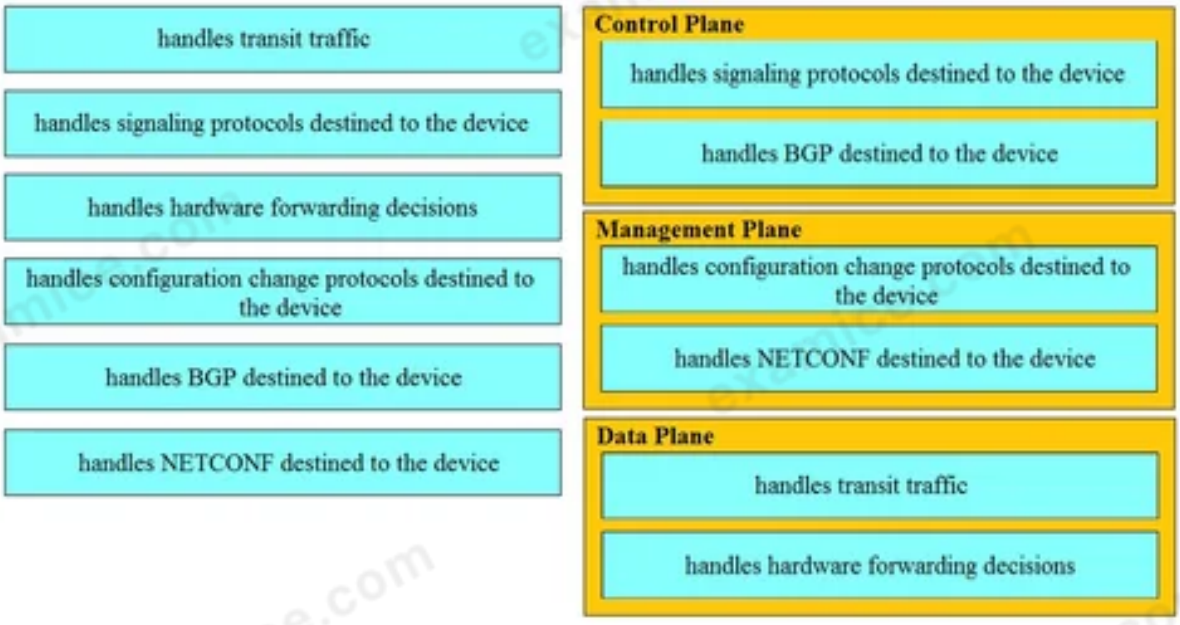

Users cannot access a webserver and after the traffic is captured, the capture tool shows an ICMP packet that reports "communication administratively prohibited". What is the cause of this webserver access issue?

A An access list along the path is blocking the traffic. ✓ CORRECT

B Users must authenticate on the webserver to access it.

C A router along the path is overloaded and thus dropping traffic.

D The traffic is not allowed to be translated with NAT and dropped.

SUGGESTED ANSWER

The suggested answer is A.

An ICMP message stating 'communication administratively prohibited' typically indicates that a router or firewall along the path is configured to block the traffic due to an access control list (ACL) or a similar filtering rule. This message is generated when traffic is intentionally blocked for security or policy reasons, making an access list the most likely cause of the webserver access issue.

Issued to kamjunhao@gmail.com · October 17, 2026

Which application should be used to externally access all applications deployed in the same host machine with a single public IP address and port, when each application listens on different local ports?

A reverse proxy ✓ CORRECT

B load balancer

C DNS

D firewall

SUGGESTED ANSWER

The suggested answer is A.

To externally access all applications deployed on the same host machine with a single public IP address and port, a reverse proxy should be used. A reverse proxy listens on the public IP and port, and routes incoming traffic to the appropriate application based on factors such as the URL or hostname requested by the client. This allows multiple local applications listening on different ports to be accessed through a single point of entry.

Issued to kamjunhao@gmail.com · October 17, 2026

Which implementation creates a group of devices on one or more LANs that are configured to communicate as if they were attached to the same wire?

A WLAN

B VLAN ✓ CORRECT

C IPsec

D HSRP

SUGGESTED ANSWER

The suggested answer is B.

A VLAN (Virtual Local Area Network) creates a group of devices on one or more LANs that communicate as if they are on the same physical network, even though they might be in different physical locations. This is achieved by logically segmenting the network at the data link layer (Layer 2).

Issued to kamjunhao@gmail.com · October 17, 2026

What are two properties of private IP addresses? (Choose two.)

A They can be used to access the Internet directly.

B They are more secure than public IP addresses.

C They are not globally unique. ✓ CORRECT

D They can be repeated within the same local network. ✓ CORRECT

E They are controlled globally by an IP address registry.

SUGGESTED ANSWER

The suggested answer is C, D.

Private IP addresses are not globally unique. They are reserved for use within private networks and can be reused across different private networks. Furthermore, private IP addresses can be repeated within the same local network. This is often done in home or business networks where devices can share the same private IP range without conflicting with each other, as long as they exist in separate local networks.

Issued to kamjunhao@gmail.com · October 17, 2026

Which protocol runs over TCP port 23?

A SSH

B NETCONF

C HTTP

D Telnet ✓ CORRECT

SUGGESTED ANSWER

The suggested answer is D.

Telnet runs over TCP port 23. It is a protocol used to provide a bidirectional interactive text-oriented communication facility using a virtual terminal connection.

Issued to kamjunhao@gmail.com · October 17, 2026

Which two details are captured from the subnet mask? (Choose two.)

A portion of an IP address that refers to the subnet ✓ CORRECT

B default gateway of the host

C unique number ID assigned to the host

D part of an IP address that refers to the host ✓ CORRECT

E network connection of a host or interface

SUGGESTED ANSWER

The suggested answer is A, D.

The subnet mask identifies which portion of an IP address refers to the network (subnet) and which part refers to the host. Specifically, the subnet mask helps determine the portion of an IP address that is reserved for network identification (subnet) and for identifying individual devices within that network (host).

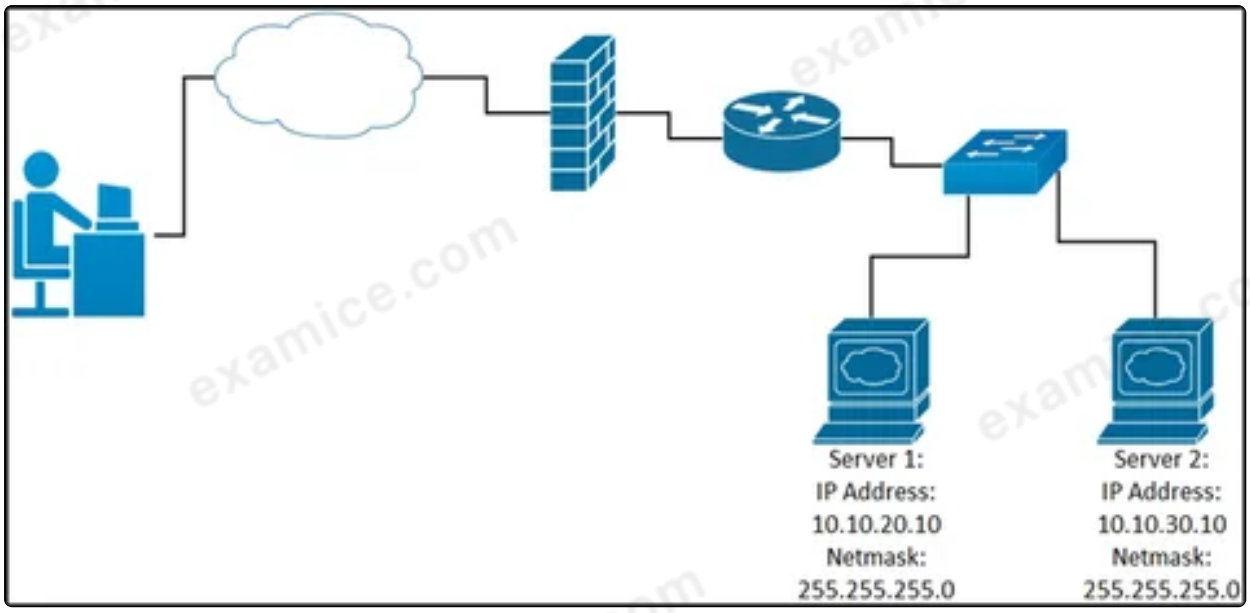

Refer to the exhibit. While developing a Cisco Webex bot, an application reaches the public IP address of the firewall, but traffic is forwarded to the IP address of **server 1** instead of the IP address of **server 2**. What causes this issue?

A The proxy server that rewrites traffic is misconfigured.

B The router is sending the traffic to server 1 instead of server 2.

C The switch is forwarding IP traffic to the wrong VLAN.

D NAT is misconfigured on the firewall. ✓ CORRECT

SUGGESTED ANSWER

The suggested answer is D.

The issue is caused by a misconfiguration in the NAT settings on the firewall. NAT (Network Address Translation) is responsible for translating the public IP address to the appropriate internal server address. If the NAT configuration is incorrect, traffic intended for server 2 may be sent to server 1 instead. This explains why the application is reaching server 1 instead of server 2, as the firewall is forwarding the traffic incorrectly due to the NAT misconfiguration.

Issued to kamjunhao@gmail.com · October 17, 2026

Developer is working on a new feature and made changes on a branch named **branch-413667549a-new**. When merging the branch to production, conflicts occurred. Which Git command must the developer use to recreate the pre-merge state?

A git merge λ€"no-edit

B git merge λ€"commit

C git merge λ€"revert

D git merge λ€"abort ✓ CORRECT

SUGGESTED ANSWER

The suggested answer is D.

To recreate the pre-merge state and abort the merge process when conflicts arise, the correct Git command to use is 'git merge --abort'. This command will revert the repository to the state before the merge attempt was started, effectively undoing the merge process and discarding any changes made by the merge.

Issued to kamjunhao@gmail.com · October 17, 2026

A company wants to automate the orders processed on its website using API. The network device that supports the solution must:

- support XML encoding
- support distributed transactions
- support YANG data models
- be support software redundancy

Which requirement prevents the use of RESTCONF for the solution?

A software redundancy

B YANG data models

C distributed transactions ✓ CORRECT

D XML encoding

SUGGESTED ANSWER

The suggested answer is C.

RESTCONF is a protocol that provides mechanisms to access and manipulate data defined in the YANG model. It supports XML encoding, YANG data models, and software redundancy. However, it does not support distributed transactions, which involve executing a series of operations across multiple network devices in a coordinated manner. Therefore, the requirement for supporting distributed transactions prevents the use of RESTCONF for the solution.

DRAG DROP

Refer to the exhibit. Drag and drop the code from the bottom onto the box where the code is missing to construct a Python script by using the Cisco SDK. Not all options are used.

```
import sys, json, argparse
from intersight.intersight_api_client import IntersightApiClient
from intersight.apis import asset_device_registration_api, asset_device_claim_api

result = dict(changed=False)

parser = argparse.ArgumentParser()
parser.add_argument('-a', '--api_params', default='intersight_api_params.json')
parser.add_argument('-t', '--target_host', dest='hostname', required=True)
args = parser.parse_args()
with open(args.api_params, 'r') as api_file:
    intersight_api_params = json.load(  [          ]  )
api_instance = IntersightApiClient(
    host=intersight_api_params[  [          ]  '],
    private_key=intersight_api_params['api_private_key_file'],
    api_key_id=intersight_api_params['api_key_id'],
)
api_handle = asset_device_registration_api.AssetDeviceRegistrationApi(api_instance)

kwargs = dict(filter="ConnectionStatus eq 'Connected'")
[          ]  = api_handle.asset_device_registrations_get(** [          ]  )
for device in api_result.results:
    if device.device_ip_address[0] == args.hostname:
        api_handle = asset_device_claim_api.AssetDeviceClaimApi(api instance)
        api_handle.asset_device_claims_moid_delete(moid=device.device_claim.moid)
        result['changed'] = True
        break
```

kwargs | args | api_file | api_key | api_base_uri | result | api_result

SUGGESTED ANSWER

```
import sys, json, argparse
from intersight.intersight_api_client import IntersightApiClient
from intersight.apis import asset_device_registration_api, asset_device_claim_api

result = dict(changed=False)

parser = argparse.ArgumentParser()
parser.add_argument('-a', '--api_params', default='intersight_api_params.json')
parser.add_argument('-t', '--target_host', dest='hostname', required=True)
args = parser.parse_args()
with open(args.api_params, 'r') as api_file:
    intersight_api_params = json.load(  api_file  )
api_instance = IntersightApiClient(
    host=intersight_api_params[  api_base_uri  '],
    private_key=intersight_api_params['api_private_key_file'],
    api_key_id=intersight_api_params['api_key_id'],
)
api_handle = asset_device_registration_api.AssetDeviceRegistrationApi(api_instance)

kwargs = dict(filter="ConnectionStatus eq 'Connected'")
  result  = api_handle.asset_device_registrations_get(**  kwargs  )
for device in api_result.results:
    if device.device_ip_address[0] == args.hostname:
        api_handle = asset_device_claim_api.AssetDeviceClaimApi(api instance)
        api_handle.asset_device_claims_moid_delete(moid=device.device_claim.moid)
        result['changed'] = True
        break
```

kwargs | args | api_file | api_key | api_base_uri | result | api_result

QUESTION 276

Issued to kamjunhao@gmail.com · October 17, 2026

DRAG DROP

- -

Drag and drop the functions from the left onto the networking devices on the right.

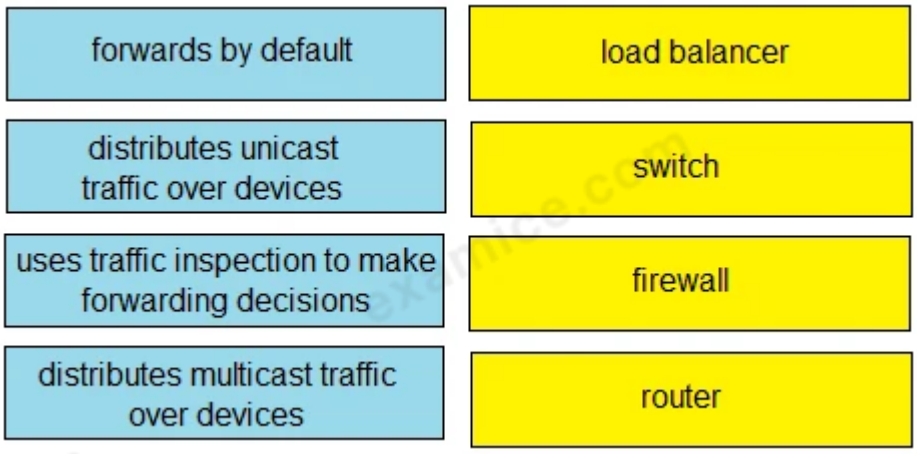

SUGGESTED ANSWER

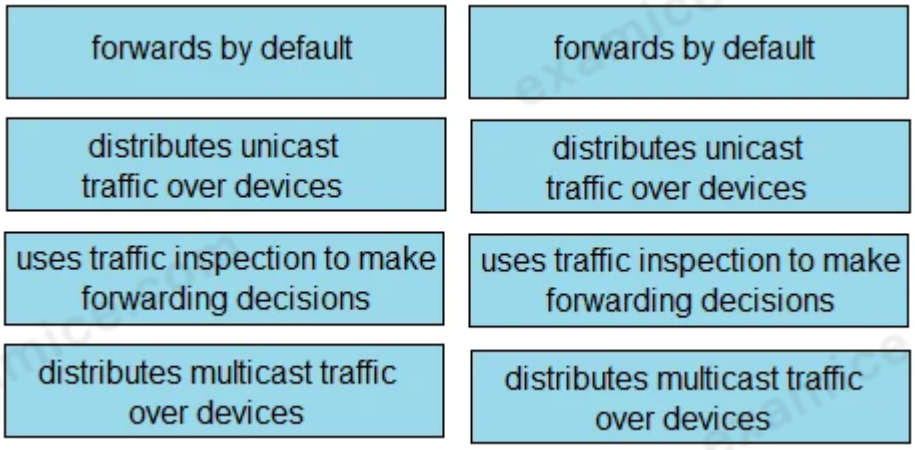

Which technology is responsible for resolving a host name to an IP address?

A DNS ✓ CORRECT

B SNMP

C DHCP

D NTP

SUGGESTED ANSWER

The suggested answer is A.

The technology responsible for resolving a host name to an IP address is DNS (Domain Name System). DNS translates human-friendly domain names (e.g., www.example.com) into IP addresses that computers use to identify each other on the network. SNMP (Simple Network Management Protocol) is used for network management, DHCP (Dynamic Host Configuration Protocol) is used for dynamic IP address assignment, and NTP (Network Time Protocol) is used for clock synchronization between computer systems.

examice.com

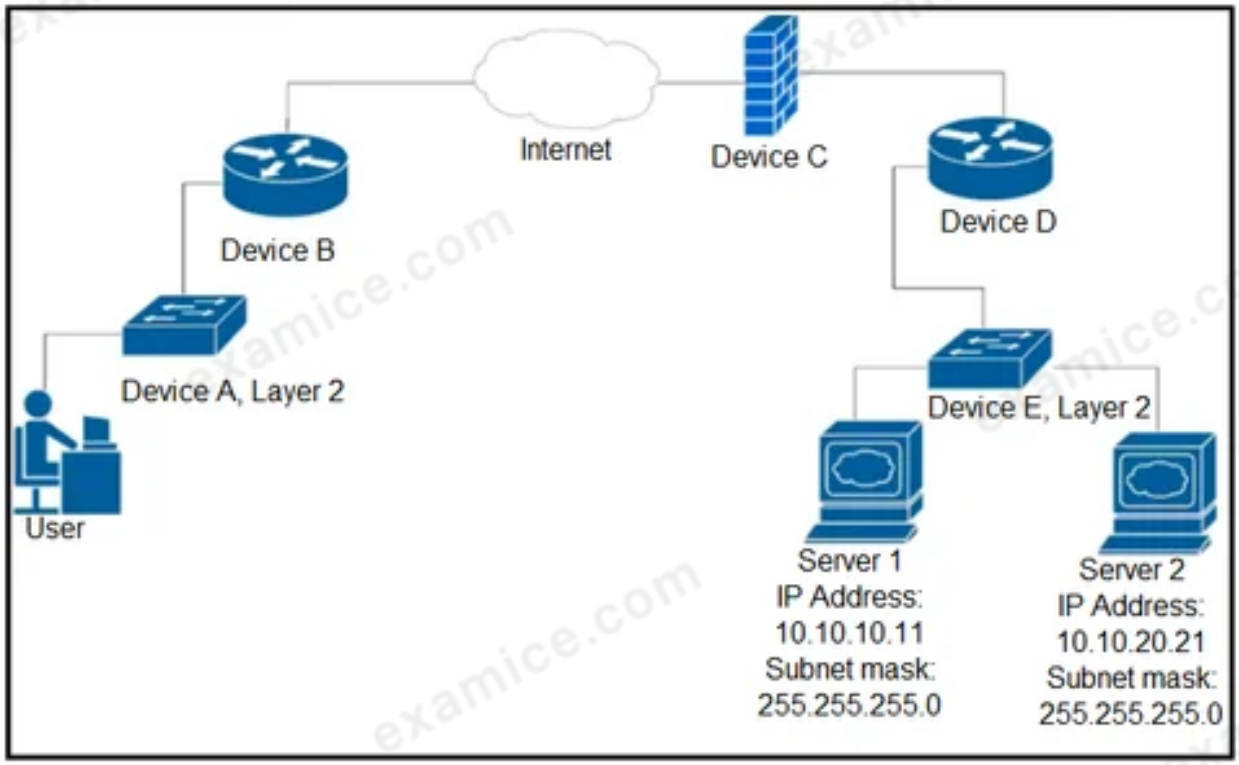

Refer to the exhibit. Up to which device does the communication server 1 and server 2 go?

A device B

B device C

C device D ✓ CORRECT

D device E

SUGGESTED ANSWER

The suggested answer is C.

The communication between server 1 and server 2, which are on different subnets, typically requires the use of a router to facilitate communication between the two networks. In this network diagram, Device D is labeled as a router, which means it is equipped to route traffic between the two servers. Therefore, the communication between server 1 and server 2 would go up to Device D.

```
url = 'https://api.amp.cisco.com/v1/computers'
response = session.get (url)
response_json = response.json ()

for item in response_json ['data'] :
     print (item['connector_guid'], item['hostname'])

while 'next' in response_json['metadata'] ['links']:
    [                                                ]
    response = session.get (next_url)
    response_json = response.json()
    for item in response_json['data']:
        print(item['connector_guid'], item['hostname'])
```

Refer to the exhibit. An engineer sends the request to collect data over Cisco AMP for Endpoints API. The Engineer must list guide and hostname data for all computers, but the first request returns only 500 items out of 2,000. Then, the engineer adds the loop to collect all the data. What must be added to the script where the code is missing to complete the requests?

A `next_url = response_json ['metadata'] ['links'] ['next']` ✓ CORRECT

B `next_url = response_json ['metadata'] ['next']`

C `next_url = response_json ['next']`

D `next_url = response_json ['metadata'] ['links']`

SUGGESTED ANSWER

The suggested answer is A.

To correctly fetch the 'next' URL for further API requests and to loop through all the data, we should follow the nested structure of the JSON response. From the script provided, it's clear that the 'next' URL is located within 'metadata', then 'links'. Hence, the correct code to add would be: next_url = response_json['metadata']['links']['next'].

QUESTION 280

Which protocol is used for clock synchronization between network devices?

A FTP

B NNTP

C BGP

D NTP ✓ CORRECT

SUGGESTED ANSWER

The suggested answer is D.

NTP (Network Time Protocol) is used for clock synchronization between network devices. It is designed to synchronize the clocks of computers and devices over a network to ensure that they all have the same time.

Issued to kamjunhao@gmail.com · October 17, 2026

What is the meaning of the HTTP status code 204?

A request completed; new resource created

B server successfully processed request; no content returned ✓ CORRECT

C standard response for successful requests

D invalid query parameters

SUGGESTED ANSWER

The suggested answer is B.

The HTTP status code 204 means that the server has successfully processed the request but there is no content to return. This is used when a request is successful but there is no need to convey any data back to the client.

Issued to kamjunhao@gmail.com · October 17, 2026

Which two commands download and execute an Apache web server container in Docker with a port binding 8080 in the container to 80 on the host? (Choose two.)

A docker pull apache

B docker run –p 8080:80 httpd ✓ CORRECT

C docker run –p 80:8080 httpd

D docker pull httpd ✓ CORRECT

E docker pull https

SUGGESTED ANSWER

The suggested answer is B, D.

To download and execute an Apache web server container in Docker with a port binding of 8080 in the container to port 80 on the host, you need to use two specific commands. First, 'docker pull httpd' will download the Apache HTTP Server image (httpd) from the Docker Hub. Second, 'docker run -p 80:8080 httpd' will start a new container based on the httpd image with the specified port mapping. The correct binding is specified as '-p host:container', which means option B ('docker run -p 8080:80 httpd') correctly maps port 8080 in the container to port 80 on the host. Therefore, the correct answers are 'docker pull httpd' and 'docker run -p 80:8080 httpd'.

Issued to kamjunhao@gmail.com · October 17, 2026

A group of software developers wants to improve its collaboration with the operations team. The group wants to deliver release-ready code that merges code changes back to the main branch and runs the automated testing as often as possible. Which DevOps concept does this scenario represent?

A continuous delivery

B version control

C continuous integration ✓ CORRECT

D continuous deployment

SUGGESTED ANSWER

The suggested answer is C.

This scenario describes a process where developers frequently merge code changes back to the main branch and run automated tests. This is the essence of continuous integration, which ensures that code changes are automatically tested and integrated into the main branch as often as possible.

A developer is running an application that connects to the Cisco website and collects data. The application will be hosted in a local data center and the data will need to be collected on a frequent basis. The application client requires certain environmental variables to be set before the run. Which Bash command sets the environmental variables for a Linux system?

A `"cisco.com"=WEBSITE`

B `export lvar=23`

C `WEBSITE="cisco.com"`

D `export website="cisco.com"` ✓ CORRECT

SUGGESTED ANSWER

The suggested answer is D.

In a Linux system, to set an environmental variable, the 'export' command is typically used. By combining 'export' with the appropriate variable assignment, you can ensure that the variable is set for the current session and any subprocesses. In this case, setting the variable for the Cisco website should follow the format 'export VARIABLE=value', making 'export WEBSITE="cisco.com"' the correct command. This ensures the variable WEBSITE is set to 'cisco.com' and is available to any subprocesses.

DRAG DROP

- -

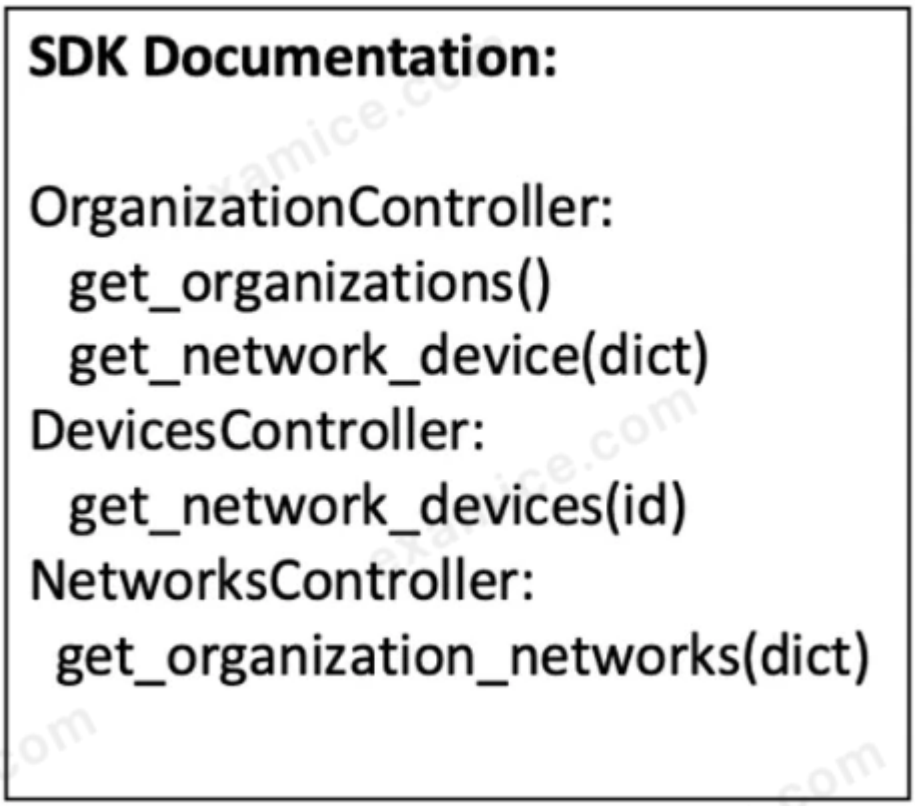

Refer to the exhibit. A script must output details of all the Cisco Meraki MS220-BP switches across all organizations and networks. Drag and drop the code snippets from the bottom onto the boxes in the code to complete the script. Not all options are used.

```
from meraki_sdk.meraki_sdk_client import MerakiSdkClient
from meraki_sdk.exceptions.api_exception import APIException

api_key = "API_KEY"
client = MerakiSdkClient(api_key)

for org in [                                                    ]
    try:
        options = {"organization id": org["id"]}
        networks = [                                            ]
        for network in networks:
            devices = [                                         ]
            for device in devices:
                if device["model"] == "MS220-8P":
                    options = {"network id": network["id"], "serial": device["serial"]}
                    output = [                                  ]
                    print(output)
    except APIException as e:
        pass
```

client.organizations.get_organizations():

client.networks.get_organization_networks(api_key)

client.networks.get_organization_networks(options)

client.devices.get_network_devices(network ["id"])

client.devices.get_network_device(options=options)

client_devices.get_network_device(device ["model"])

SUGGESTED ANSWER

```
from meraki_sdk.meraki_sdk_client import MerakiSdkClient
from meraki_sdk.exceptions.api_exception import APIException

api_key = "API_KEY"
client = MerakiSdkClient(api_key)

for org in client.organizations.get_organizations():
    try:
        options = {"organization id": org["id"]}
        networks = client.networks.get_organization_networks(options)
        for network in networks:
            devices = client.devices.get_network_devices(network ["id"])
            for device in devices:
                if device["model"] == "MS220-8P":
                    options = {"network id": network["id"], "serial": device["serial"]}
                    output = client.devices.get_network_device(options=options)
                    print(output)
    except APIException as e:
        pass
```

client.organizations.get_organizations():

client.networks.get_organization_networks(api_key)

client.networks.get_organization_networks(options)

client.devices.get_network_devices(network ["id"])

client.devices.get_network_device(options=options)

client_devices.get_network_device(device ["model"])

QUESTION 286

Issued to kamjunhao@gmail.com · October 17, 2026

```
URL: https://example.com/restconf/data/Cisco-IOS-XE-native:native/logging/monitor
Method: POST

Headers: {'Content-type': 'application/yang-data+json', 'Accept': 'application/yang-data+json,
* application/yang-data.errors+json'}

Body:

{
   "severity": "alerts"
}
```

Refer to the exhibit. Which HTTP code is returned after the RESTCONF query is executed?

A 201 ✓ CORRECT

B 204

C 302

D 304

SUGGESTED ANSWER

The suggested answer is A.

When executing a RESTCONF POST method, which is used to create a new resource on the server, a successful operation typically returns the HTTP status code 201 - Created. This indicates that the request has been fulfilled and has resulted in one or more new resources being created. The headers specified ('Content-type' and 'Accept') and the body content are correctly formatted for a RESTCONF POST request, which aligns with receiving a 201 response code upon successful execution.

DRAG DROP

- -

Drag and drop the code snippets from the bottom onto the blanks in the code to complete the happy path scenario. Not all options are used.

```
import member as m
import pytest
class Team:
    def __init__(self, name):
        self.name = name
        self.members = []
    def add_member(self, member):
        if member:
            if member not in self.members:
                [          ]
                    return True
            else:
                [          ]
        else: [          ]
@pytest.fixture
def team():
    team = Team('Reds')
    yield team
    del team
@pytest.fixture
def member():
    member = m.Member('Chris George')
    yield member
    del member
@pytest.mark.usefixtures('team', 'member')
class TestHappyPathAddMemberToTeam:
    def test_add_member_to_team(self, team, member):
     assert [          ] is True
```

return True
team.add_member(member)
self.members.append(member)
yield member
return False
member.add_member()

SUGGESTED ANSWER

```
import member as m
import pytest
class Team:
    def __init__(self, name):
        self.name = name
        self.members = []
    def add_member(self, member):
        if member:
            if member not in self.members:
                member.add_member()
                return True
            else:
                return False
        else:
            team.add_member(member)
@pytest.fixture
def team():
    team = Team('Reds')
    yield team
    del team
@pytest.fixture
def member():
    member = m.Member('Chris George')
    yield member
    del member
@pytest.mark.usefixtures('team', 'member')
class TestHappyPathAddMemberToTeam:
    def test_add_member_to_team(self, team, member):
        assert yield member is True
```

return True

team.add_member(member)

self.members.append(member)

yield member

return False

member.add_member()

Issued to kamjunhao@gmail.com · October 17, 2026

Which traffic is handled on the control plane?

A BGP ✓ CORRECT

B SMB

C NTP

D NETCONF

SUGGESTED ANSWER

The suggested answer is A.

BGP (Border Gateway Protocol) is handled on the control plane. The control plane is responsible for the routing decisions and the dissemination of routing information, which BGP falls under. BGP deals with the exchange of routing and reachability information, making it a key element of the control plane.

```
- name: Configure Interfaces
  with_items: "{{interfaces}}"
  netconf_config:
  <<: *host_info
  xml: |
    <config>
      <interfaces xmlns="urn:ietf:params:xml:ns:yang:ietf-interfaces">
        <interface>
          <name>{{item.interface_type}}{{item.interface_id}}</name>
          <description>{{item.description}}</description>
          <type xmlns:ianaift="urn:ietf:params:xml:ns:yang:iana-if-
          type">ianaift:ethernetCsmacd</type>
          <enabled>true</enabled>
          <ipv4 xmlns="urn:ietf:params:xml:ns:yang:ietf-ip">
            <address>
              <ip>{{item.ip_address}}</ip>
              <netmask>{{item.subnet_mask}}</netmask>
            </address>
          </ipv4>
        </interface>
      </interfaces>
    </config>
```

Refer to the exhibit. A network engineer must configure new interfaces on a set of devices and is planning to use an Ansible playbook for the task. All devices support SSH and NETCONF protocol, and the interface variables are unique per device. In which directory are the YAML files including variables hosted to automate the task with the netconf_config module?

A current working directory

B host_vars directory ✓ CORRECT

C group_vars directory

D home directory

SUGGESTED ANSWER

The suggested answer is B.

The YAML files containing variables for Ansible playbooks are typically stored in specific directories to ensure proper organization and access when automating tasks. Given that the interface variables are unique per device, the most appropriate directory to host these variables should be the 'host_vars' directory. The 'host_vars' directory allows for storing host-specific variables, which matches the requirement for uniqueness per device,

facilitating the use of the netconf_config module to configure different interfaces on each device.

QUESTION 290

Issued to kamjunhao@gmail.com · October 17, 2026

Which standard supported by Cisco IOS XE and Cisco NX-OS is used for automating the configuration of multiple devices across a network?

A SNMP – YANG

B SYSLOG – YANG

C CLI – YANG

D NETCONF – YANG ✓ CORRECT

SUGGESTED ANSWER

The suggested answer is D.

NETCONF, in combination with YANG, is the standard used for automating the configuration of multiple devices across a network. NETCONF (Network Configuration Protocol) provides mechanisms to install, manipulate, and delete the configuration of network devices, while YANG (Yet Another Next Generation) is a data modeling language used to model configuration and state data manipulated by NETCONF.

Issued to kamjunhao@gmail.com · October 17, 2026

A developer has addressed a bug that was found in the production code of an application. A separate file named ‘bug427896191v_fix” has been created with the changes to the code. Which Git command must be used to incorporate the bug fix into the production code?

A git rebase

B git cat-file

C git merge-file ✓ CORRECT

D git bisert

SUGGESTED ANSWER

The suggested answer is C.

To incorporate the bug fix into the production code, the Git command that should be used is `git merge-file`. This command is used to incorporate changes from one file into another, considering that both files are modifications of a common base file. In this case, the separate file named ‘bug427896191v_fix’ contains the changes, and you want to merge these changes into the production code.

Issued to kamjunhao@gmail.com · October 17, 2026

What is a principle of a code review process?

A Changes are made after the code is submitted to source control.

B It must not prevent code from getting into production as quickly as possible.

C Naming standards must be consistent. ✓ CORRECT

D A technical lead must sign off on the review.

SUGGESTED ANSWER

The suggested answer is C.

A principle of a code review process is that naming standards must be consistent. Consistent naming standards help maintain readability and understanding in a codebase by ensuring that everyone uses the same conventions. This aids in maintaining clarity and reducing the likelihood of bugs or confusion. Although other aspects, like timing and approvals, can be important in specific workflows, maintaining consistent naming standards is a foundational principle in improving and maintaining the quality of the code.

Issued to kamjunhao@gmail.com · October 17, 2026

Why would a developer compare a current version of code to a previous version?

A to provide the single source of truth

B to troubleshoot code failures ✓ CORRECT

C to track who made a change

D to aid in collaboration

SUGGESTED ANSWER

The suggested answer is B.

A developer compares a current version of code to a previous version primarily to troubleshoot code failures. This comparison helps identify changes that might have introduced bugs or issues, allowing the developer to understand and fix the problem.

Issued to kamjunhao@gmail.com · October 17, 2026

Which Cisco platform is used to manage data center infrastructure through third-party tools and system integrations?

A Cisco DNA Center

B Cisco UCS Manager

C Cisco Intersight ✓ CORRECT

D Cisco UCS Director

SUGGESTED ANSWER

The suggested answer is C.

Cisco Intersight is the platform used to manage data center infrastructure through third-party tools and system integrations. Cisco Intersight infrastructure services include deployment, monitoring, management, and support of both physical and virtual infrastructure. Importantly, Cisco Intersight provides integrations to third-party operations tools such as ServiceNow, enhancing the ability to manage data center infrastructure efficiently using existing solutions.

```
HTTPS/1.1 201 Created
 Date: Tue, 08 Nov 2020 09:37:27 GMT
 Server: example-server
 Location: https://example.com/restconf/data\
           example-jukebox/library/dogbreed=Australian%20Cattle%20Dog
 Last Modified: Tue 08 Nov 2020 09:37:27 GMT
 ETag: "s1878124t4c"
```

Refer to the exhibit. Which RESTCONF request results in this response?

A

```
GET /restconf/data/example-jukebox:jukebox/library HTTP/1.1
     Host: example.com
     Content-Type: application/yang-data+json

     {
      "Example-jukebox:dogbreed" : [
        {
          "name" : "Australian Cattle Dog
        }
      ]
   }
```

B

```
CONFIG /restconf/data/example-jukebox:jukebox/library HTTP/1.1
     Host: example.com
     Content-Type: application/yang-data+json

     {
      "Example-jukebox:dogbreed" : [
        {
          "name" : "Australian Cattle Dog
        }
     ]
  }
```

C

```
PUT /restconf/data/example-jukebox:jukebox/library HTTP/1.1
     Host: example.com
     Content-Type: application/yang-data+json

     {
      "Example-jukebox:dogbreed" : [
        {
          "name" : "Australian Cattle Dog
        }
      ]
  }
```

D

```
POST /restconf/data/example-jukebox:jukebox/library HTTP/1.1
     Host: example.com
     Content-Type: application/yang-data+json

     {
      "Example:dogbreed" : [
        {
          "name" : "Australian Cattle Dog
        }
      ]
  }
```

✓ CORRECT

SUGGESTED ANSWER

The suggested answer is D.

A 201 Created status code indicates that a request has resulted in the creation of a new resource. In RESTful APIs, POST requests are typically used to create new resources, which aligns with the 201 Created response status code shown in the exhibit. The POST request provided in option D is designed to create a new dog breed resource under the specified path. Hence, option D, which uses the POST method to create a new resource with the dog breed 'Australian Cattle Dog', is the correct response.

Personal copy · kamjunhao@gmail.com

```
$ find /home/user/backup -mtime +30 -type f -print
$ find /home/user/backup -mtime +30 -type f -delete
```

Refer to the exhibit. An engineer is managing the network of an enterprise. The network is using a distributed deployment model. The enterprise uses database to store logs. The current policy requires logs to be stored if changes are made to the infrastructure in any of the devices on the data centers. Which workflow is being automated by the Bash script?

A returning backup files that are older than 30 days

B deleting backup files that are older than 30 days ✓ CORRECT

C configuring the directory to delete files automatically

D automating deletion of all backup files every 30 days

SUGGESTED ANSWER

The suggested answer is B.

The Bash script uses the 'find' command to locate files in the /home/user/backup directory that are older than 30 days and then deletes them. The '-mtime +30' option specifies files that were modified more than 30 days ago, '-type f' ensures only files are targeted, and '-delete' removes those files. Thus, the script is automating the deletion of backup files that are older than 30 days.

DRAG DROP

- -

Refer to the exhibit. Drag and drop the code snippets from the bottom onto the blanks in the Python script to retrieve a list of network devices from Cisco DNA Center. Not all options are used.

SUGGESTED ANSWER

```
import requests
import json
from urllib3.exceptions import InsecureRequestWarning

requests.packages.urllib3.disable_warnings()

dna_center_url = "My_DNA_Center_URL"
authentication = ("dnacenteruser", "dnacenter_password")

def get_token ():
     url = "https:// "dna_center_url+"/dna/system/api/v1/auth/token"
     response = requests.post(url, auth=authentication, verify=False)
     token = response.json()['Token']
     return token

def get_device_list():
     token = get_token()
     url = "https:// "+dna_center_url+ "dna/intent/api/v1/ network-device "
     header = { x-auth-token : token, 'content-type' : 'application/json'}
     response = requests.get(url, headers=header)
     device_list = response.json()
     print(json.dumps (device_list, indent=4))
if_name_ == "_main_":
    get_device_list()
```

get_token() | network-device | x-auth-token | response.json()

response.xml | Authorization

What is a characteristic of RPC APIs compared to REST APIs?

A Authentication is done over provisions for the service caller and vice versa for RPC API, and REST API uses HTTP headers for authentication.

B All communications between the client and server must be stateless for RPC API, and REST API is stateful.

C The architecture model for RPC API is resource-focused, and REST API is procedure-focused. ✓ CORRECT

D The data payload must be in JSON format for RPC API, and REST API allows JSON and XML formats.

SUGGESTED ANSWER

The suggested answer is C.

RPC (Remote Procedure Call) APIs are procedure-focused, meaning they are designed around the concept of calling specific procedures or functions that are executed remotely. In contrast, REST (Representational State Transfer) APIs are resource-focused, meaning they are designed around manipulating resources (such as data entities) with a standardized set of operations like GET, POST, PUT, and DELETE. This fundamental architectural difference is one of the key distinctions between RPC and REST APIs.

Issued to kamjunhao@gmail.com · October 17, 2026

Which two situations align with infrastructure as code principles? (Choose two.)

A nonreplicable snowflake servers

B release versions to specific hardware

C maximized configuration drift

D easily reproducible systems ✓ CORRECT

E repeatable processes ✓ CORRECT

SUGGESTED ANSWER

The suggested answer is D, E.

Infrastructure as code (IaC) principles emphasize consistency, repeatability, and automation. Reproducible systems align with IaC by ensuring that infrastructure can be replicated accurately every time. Repeatable processes are crucial as they allow the same configurations and code to be reused across different environments, reducing errors and improving efficiency. Nonreplicable snowflake servers, release versions tied to specific hardware, and maximized configuration drift are contrary to IaC principles as they lead to inconsistencies and complicate automation.

```
import requests, json
url = https://sandboxdnac.cisco.com:443/dna/intent/api/v1/3daa70bdcd5b
headers = {
    'x-auth-token': 'eyJhbGc  ...  yJbN8',
    'Content-Type': 'application/json',
}
payload = {
    "settings": {
        "dhcpServer": ["172.30.200.5"],
        "dnsServer": {
            "domainName": "devnet.local",
            "primaryIpAddress": "172.30.200.6",
            "secondaryIpAddress": "172.30.200.7"},
        "syslogServer": {"ipAddresses": ["10.255.0.1"], "configureDnacIP": True}
    }
}
response = requests.request('POST', url, headers=headers, data=payload)
print(response.status_code)
```

Refer to the exhibit. A developer writes a script to create a new network by using the Cisco DNA Center API. After running the script for the first time, the developer observes that HTTP code 404 is printed to the console. Which action resolves the problem?

A The x-auth-token value must be changed to a valid token.

B The API URL must be changed with a valid URL. ✓ CORRECT

C The requested payload must be fixed to include missing parts.

D Internal errors on the code of API server must be fixed.

SUGGESTED ANSWER

The suggested answer is B.

The HTTP status code 404 denotes 'Not Found', indicating that the requested URL could not be accessed. This suggests that the URL specified in the script is incorrect or does not exist. Therefore, the solution is to modify the API URL to a valid one that points to the correct resource.

A developer plans to deploy a new application that will use an API to implement automated data collection from Webex with these requirements:

- The application was created by using the request library.
- Requires HTTP basic authentication.
- Provides data in JSON or XML formats.

Which Cisco DevNet resource helps the developer with how to use the API?

A DevNet sandbox

B API documentation ✓ CORRECT

C forums

D DevNet code exchange

SUGGESTED ANSWER

The suggested answer is B.

The best resource to help a developer understand how to use an API, especially for requirements such as HTTP basic authentication and data formats (JSON or XML), is the API documentation. API documentation provides detailed information about the API endpoints, authentication methods, data formats, and example code snippets, which is essential for implementing the automated data collection from Webex.