

C*

Actual bandwidth **fell below** the specified goal of **3% of 20000**. Meeting the goal **70%** of the total duration** of the test.

* This score is calculated by taking the Pass/Fail criteria goals defined in the test and measuring if they fell below the minimum requirement set and averaging The amount of time data fell below that goal. A = 90% and above, B = 80% - 89%, C = 70% - 79%, D = 60% - 69%, F = 59% and below.
** Duration is the total test time, excluding everything up to the Ramp-up and after the Ramp-down.

Summary

Created By		Test Name		Number Of Traffic Mix	
stefan.schobert@swisscom.com		olt-138-Staging-withBeem-Wireless		1	
		Description		Number Of Security Mix	
		Test created for Layer4-7 Enterprise Mix Test Template		0	
Queue Name		Started at	Finished at	Desired Load	Measurement
CFvEy8-03		2025-09-03 16:55:13	2025-09-03 17:01:14	20 Mbps	Bandwidth
Client Sent		Server Received	Server Sent	Client Received	Average Throughput
11.07 MB		10.52 MB	617.68 MB	615.83 MB	20.67 Mbps
Average Connections Per Second			Average Transactions Per Second		
6			12		
Traffic Mix			Security Mix		
Attempted	Passed	Failed	Attempted	Not Blocked	Blocked
2 940 Connections	100% (2 940 Connections)	0% (0 Connections)	NA	NA	NA
Device IP address		Compute Group Profile		Device ports	
10.212.193.13		SPT-CFv-KVM-BASE_L4L7-Performance		10.212.193.13/1 10.212.193.13/2	

Network Profile Configuration

Client Network



IPv4 Max Segment: 1460 B
IPv6 Max Segment: 1440 B
Receive Window: 65538 B
Retries: 2
Delayed Ack Timeout: 200 ms
Delayed Ack: 2880 B
Port Range: 1024 - 65535

Server Network



IPv4 Max Segment: 1460 B
IPv6 Max Segment: 1440 B
Receive Window: 65538 B
Retries: 2
Delayed Ack Timeout: 200 ms
Delayed Ack: 2880 B

Device Resource Utilization






Client





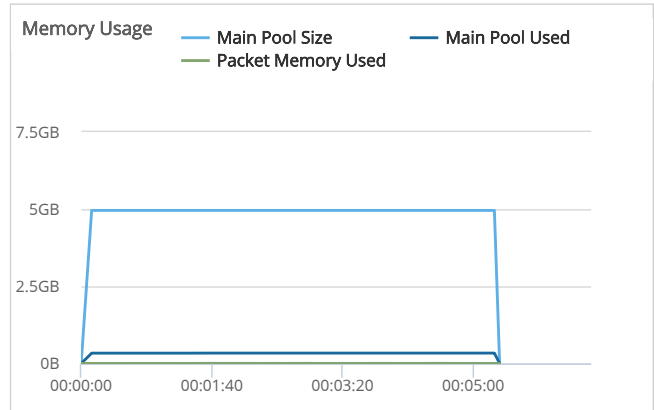
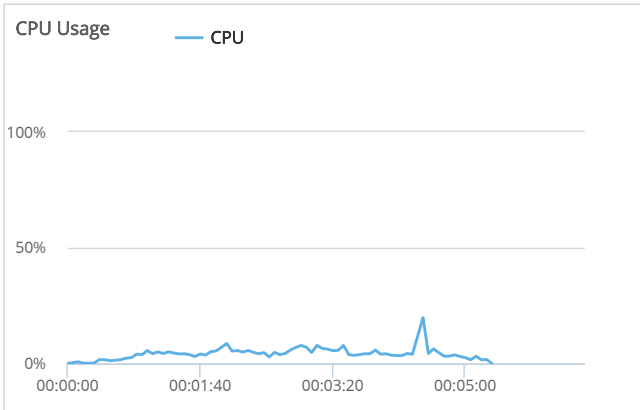



Server

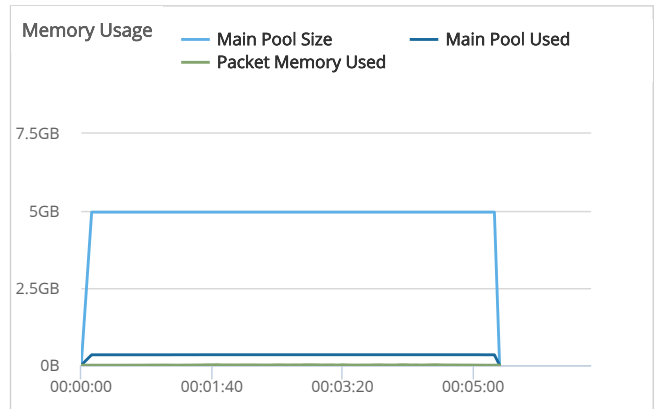
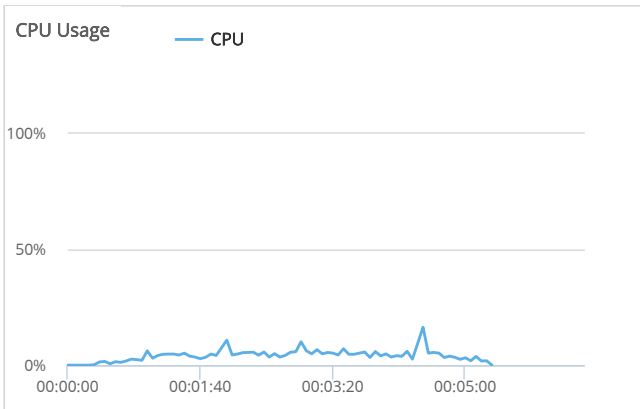


Charts

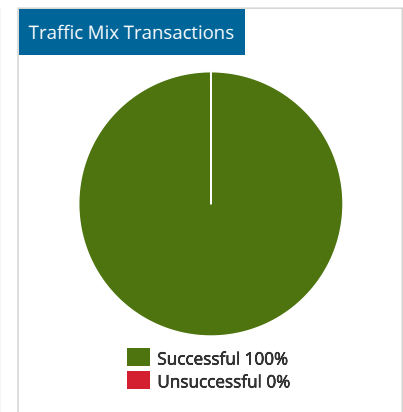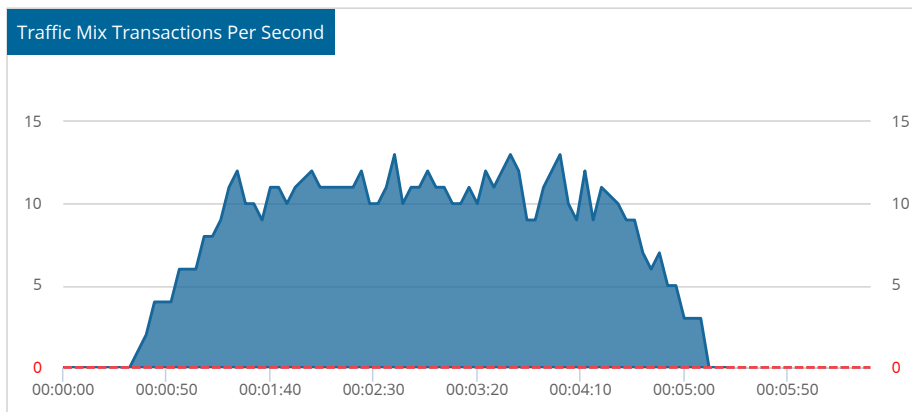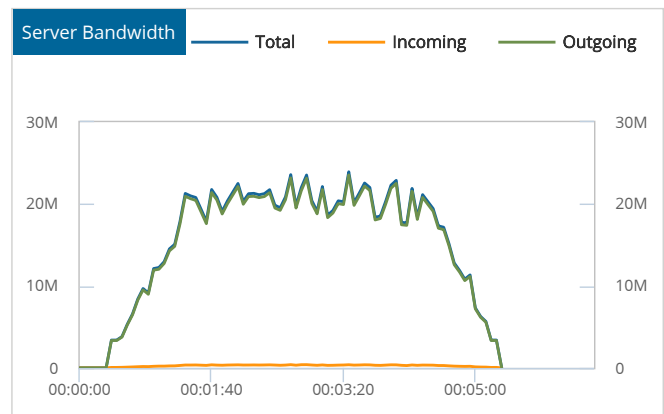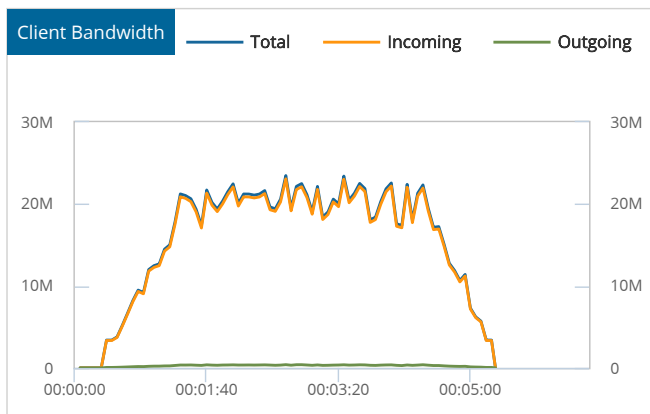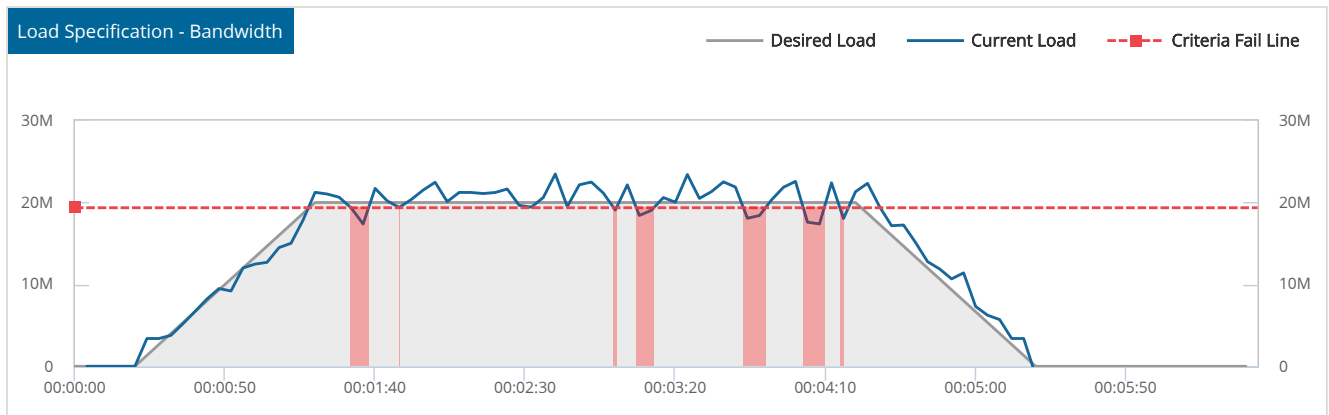

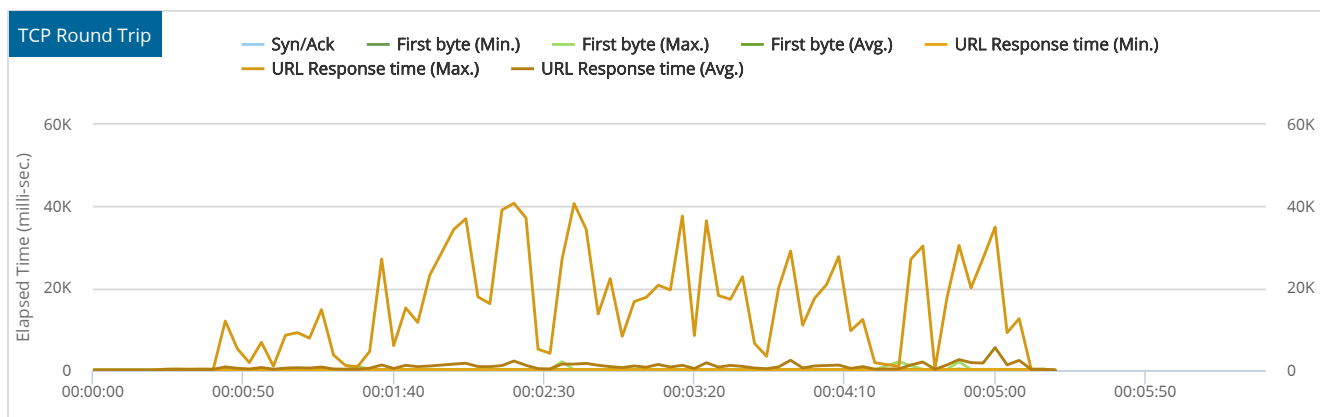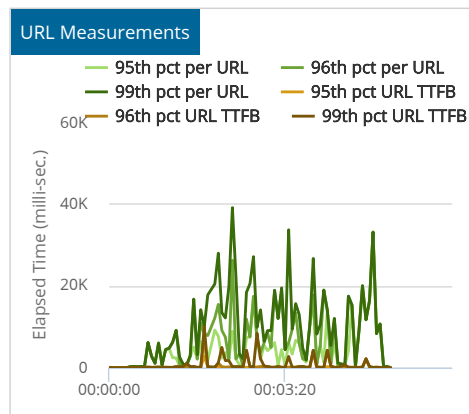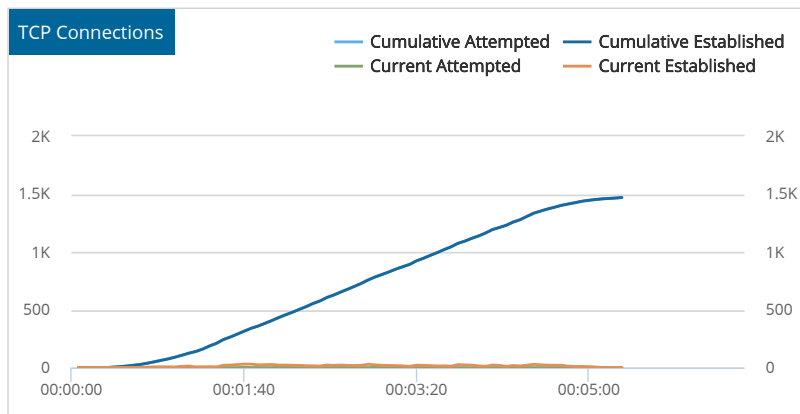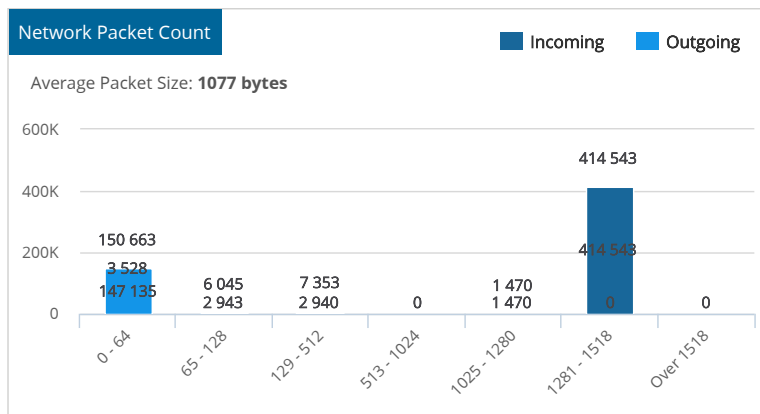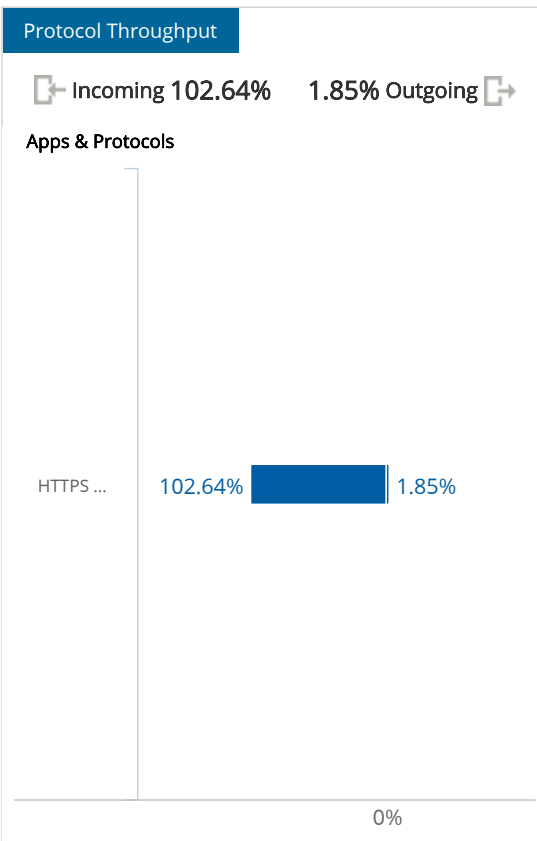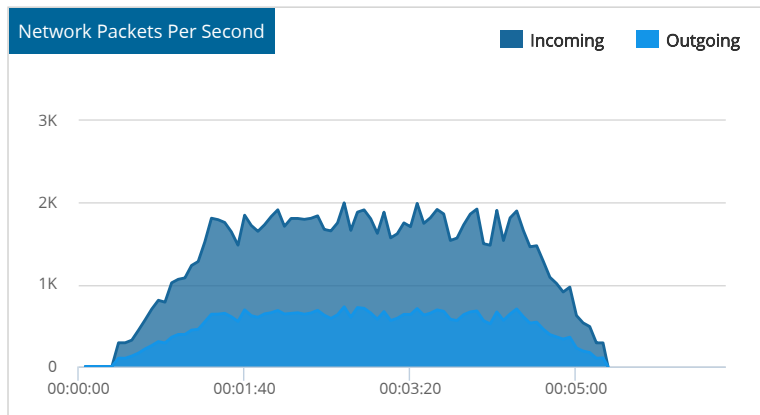

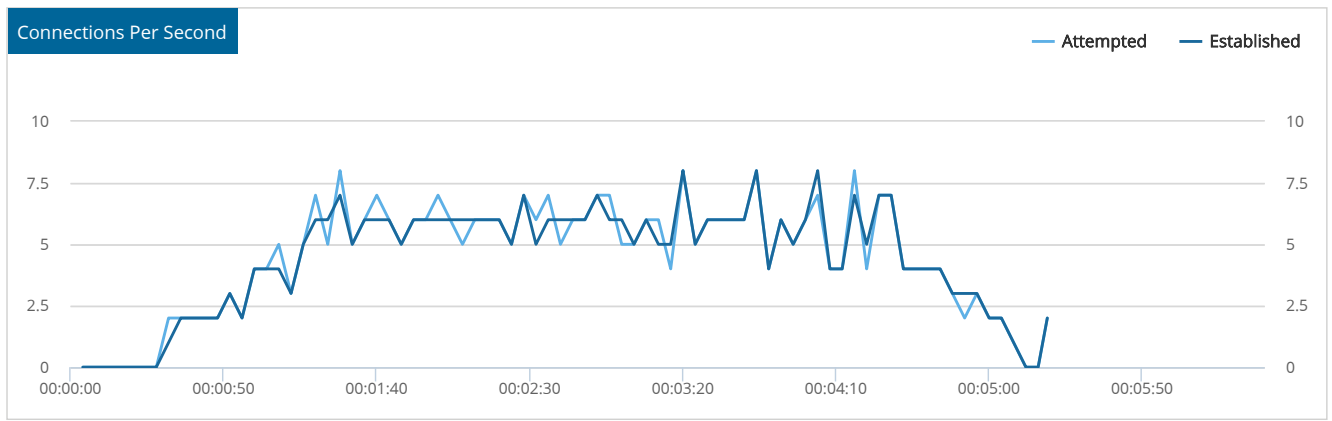

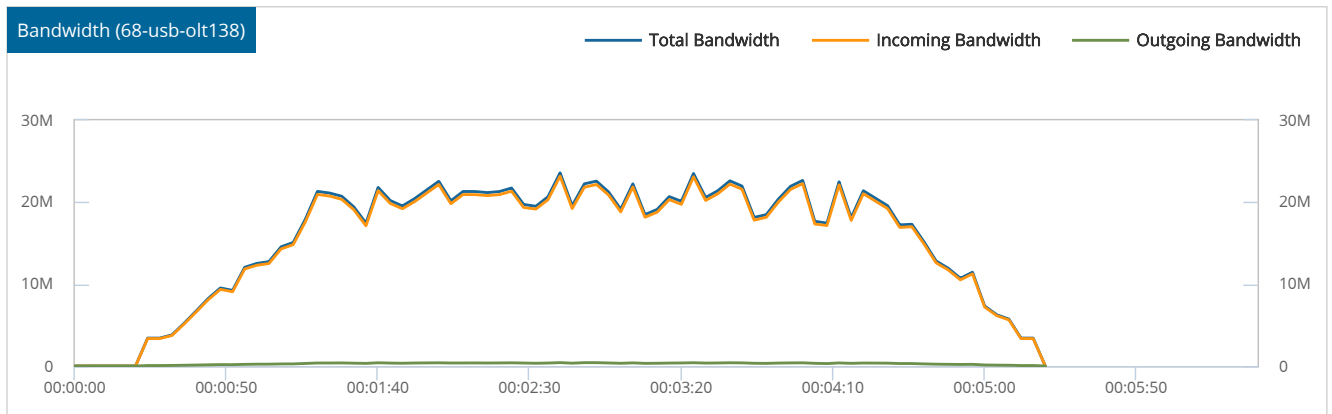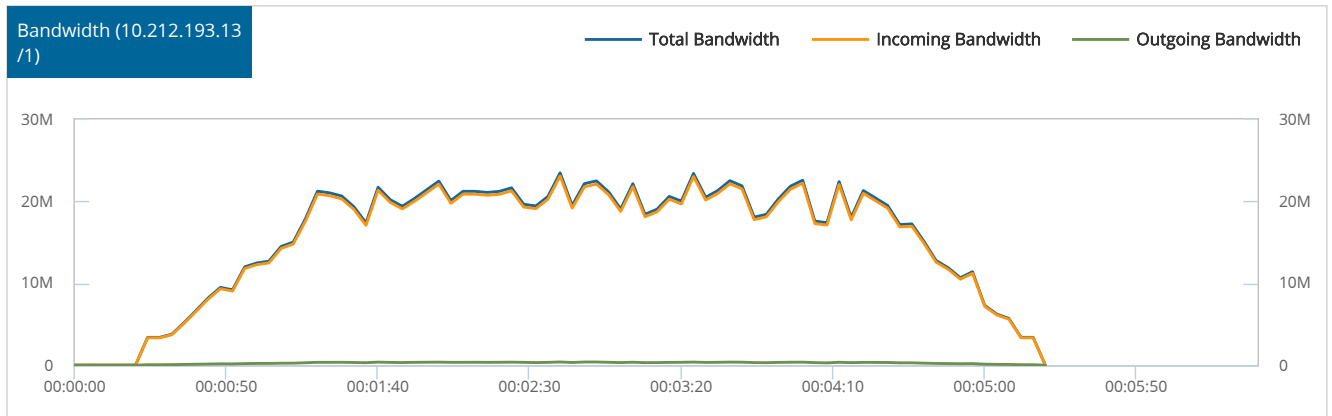

Traffic Mix Data

Protocol	IP Range	Incoming BW	Outgoing BW	Actual/Goal	Bytes Sent	Bytes Received	Successful Transactions	Unsuccessful Transactions	Attempted Transactions	Aborted Transactions
 HTTPS 1.1	195.65.233.162-195.65.233.165	20.53 Mbps	369.03 Kbps	104.48%/100%	11.07 MB	615.83 MB	2 940	0	2 940	0

Port Interfaces

Port Interface	Protocol	Incoming BW	Outgoing BW	Actual/Goal	Bytes Sent	Bytes Received	Successful Transactions	Unsuccessful Transactions	Attempted Transactions	Aborted Transactions
10.212.193.13 /1	 HTTPS 1.1	20.53 Mbps	369.03 Kbps	104.48%/100%	11.07 MB	615.83 MB	2 940	0	2 940	0

Port Interface	Protocol	Incoming BW	Outgoing BW	Total BW	Bytes Sent	Bytes Received	Successful Transactions	Unsuccessful Transactions	Attempted Transactions	Aborted Transactions
10.212.193.13 /1	HTTPS 1.1	20.53 Mbps	369.03 Kbps	20.9 Mbps	11.07 MB	615.83 MB	2 940	0	2 940	0

Subnet Data

Subnet	Apps/Protocol	Incoming BW	Outgoing BW	Total BW	Bytes Sent	Bytes Received	Successful Transactions	Unsuccessful Transactions	Attempted Transactions	Aborted Transactions
68-usb-olt138	HTTPS 1.1	20.53 Mbps	369.03 Kbps	20.9 Mbps	11.07 MB	615.83 MB	2 940	0	2 940	0

Port to Subnet Mapping

Port	Subnets
10.212.193.13/1	192.168.68.100 - 192.168.68.128
10.212.193.13/2	195.65.233.162 - 195.65.233.190