

A

FROM 26-PIT-9077 IN 3RD
STAGE HP GAS LIFT
COMPRESSOR DISCHARGE

26-000006-001 26-PY-9077B SP 229

FROM 26-PIT-9077 IN 3RD
STAGE HP GAS LIFT
COMPRESSOR DISCHARGE

26-000006-001 26-PY-9077A MEASUREMENT


B

TO 3RD STAGE HP GAS LIFT
COMPRESSOR ANTI-SURGE
VALVE, 26-FV-9076

26-000006-001

C

FROM 3RD STAGE
HP GAS LIFT
COMPRESSOR
SUCTION
SCRUBBER

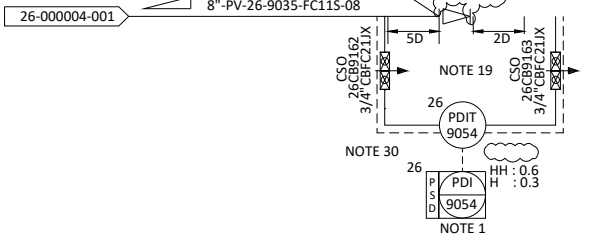

D

40GT9399

INSTRUMENT AIR

63-900002-002 1"-AI-63-9006-AS20-00 (MOTOR PURGE SYSTEM; EX-P TYPE MOTOR)

INSTRUMENT AIR

63-900002-002 1"-AI-63-9007-AS20-00

COOLING MEDIUM RETURN

FROM MOTOR COOLING 2"-WC-40-9037-AC21-00 40GT9079 2"GTAC10R 40GT 3/4"GT

COOLING MEDIUM SUPPLY TO MOTOR

COOLING 40-900003-001 2"-WC-40-9036-AC21-00 40GT9313 3/4"GTAC00R

NOTE 17
NITROGEN

64-900001-001 1"-GI-64-9002-AS20-00 64CH9003 1"CHAS00R 64GT9004 1"GTAS00R

COOLING MEDIUM RETURN FROM

LUBE OIL COOLERS 40-900003-001 3"-WC-40-9015-AC21-00 3"x2" 40GB9023 2"GBAC10R

COOLING MEDIUM SUPPLY TO LUBE

OIL COOLERS 40-900003-001 3"-WC-40-9012-AC21-00 3"x2" 40GB9022 2"GBAC10R 40GT9308 3/4"GTAC00R 40BL9021 2"BLAC00R 40BL9020 2"BLAC00R

G

TAG NUMBER	26-KA-901
SERVICE	3RD STAGE HP GAS LIFT COMPRESSOR
DUTY	kW 776 NOTE 28
FLOW RATE	kg/h 19057 NOTE 29
DISCHARGE / SUCTION OP. PRESS. (MAX)	Barg 229 / 108.5
DISCHARGE / SUCTION OP. TEMP.	°C 122 - 135 / 50
DISCHARGE / SUCTION DESIGN PRESS. (MAX)	Barg FV / 286 / FV / 286 NOTE 22
DISCHARGE / SUCTION DESIGN TEMP.	°C -46 / 160 / -46 / 160
MATERIAL	LTCS (1.7218)
QUANTITY	1x100%
TYPE	VARIABLE SPEED MOTOR DRIVEN CENTRIFUGAL
VESSEL TRIM	TT-26-9712-AS20-00
VENDOR	MAN ENERGY SOLUTIONS

H

NOTES:

- 26-PDI-9054 HH INITIATE PRESSURIZED COMPRESSOR STOP.
- LUBE OIL RESERVOIR VENT. OIL MIST SEPARATOR INSTALLED OFF-SKID.
- ATMOSPHERIC VENT .
- HIGH POINT VENT AND LOW POINT DRAIN TO BE FINALIZED BY PIPING AS PER PIPING LAYOUT.
- OIL CHANGE BY USING TEMPORARY ARRANGEMENT WITH HOSES.
- DELETED.
- DELETED.
- FLAME ARRESTER INCLUDES FLAME FILTER AND LOCATED AT END OF PIPE.
- MANUAL DRAIN PRIOR TO EACH START-UP. PUSH BUTTON WITH PERMISSIVE FOR START-UP SEQUENCE.
- DELETED.
- COMPRESSOR MOTOR EQUIPPED WITH VARIABLE SPEED DRIVE (VSD). FOR VSD MONITORING AND TRIP FUNCTION, REFER VENDOR DRAWING NO. (0D204-CIT-P-XB-ER252A-000001-002). VSD AND MCC NOT IN COMPRESSOR VENDOR SCOPE.
- DELETED.
- UPSTREAM STRAIGHT RUN MIN. 10xD. DOWNSTREAM STRAIGHT RUN MIN. 5xD.
- VENT ROUTED TO SAFE LOCATION.
- DELETED.

I

J