

1. Description

1.1. Project

Project Name	LCD_Driver
Board Name	custom
Generated with:	STM32CubeMX 6.13.0
Date	02/25/2025


1.2. MCU

MCU Series	STM32F4
MCU Line	STM32F429/439
MCU name	STM32F429IGTx
MCU Package	LQFP176
MCU Pin number	176

1.3. Core(s) information

Core(s)	Arm Cortex-M4

2. Pinout Configuration

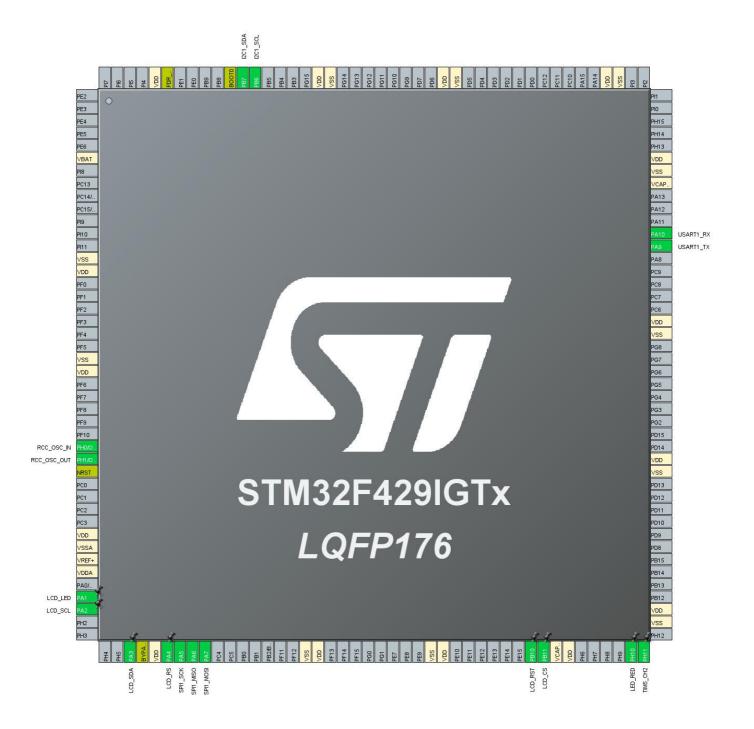


3. Pins Configuration

Pin Number LQFP176	Pin Name (function after reset)	Pin Type	Alternate Function(s)	Label
6	VBAT	Power		
14	VSS	Power		
15	VDD	Power		
22	VSS	Power		
23	VDD	Power		
29	PH0/OSC_IN	I/O	RCC_OSC_IN	
30	PH1/OSC_OUT	I/O	RCC_OSC_OUT	
31	NRST	Reset		
36	VDD	Power		
37	VSSA	Power		
38	VREF+	Power		
39	VDDA	Power		
41	PA1 *	I/O	GPIO_Output	LCD_LED
42	PA2 *	I/O	GPIO_Output	LCD_SCL
47	PA3 *	I/O	GPIO_Output	LCD_SDA
48	BYPASS_REG	Reset		
49	VDD	Power		
50	PA4 *	I/O	GPIO_Output	LCD_RS
51	PA5	I/O	SPI1_SCK	
52	PA6	I/O	SPI1_MISO	
53	PA7	I/O	SPI1_MOSI	
61	VSS	Power		
62	VDD	Power		
71	VSS	Power		
72	VDD	Power		
79	PB10 *	I/O	GPIO_Output	LCD_RST
80	PB11 *	I/O	GPIO_Output	LCD_CS
81	VCAP_1	Power		
82	VDD	Power		
87	PH10 *	I/O	GPIO_Output	LED_RED
88	PH11	I/O	TIM5_CH2	
90	VSS	Power		
91	VDD	Power		
102	VSS	Power		
103	VDD	Power		
113	VSS	Power		

Pin Number LQFP176	Pin Name (function after reset)	Pin Type	Alternate Function(s)	Label
114	VDD	Power		
120	PA9	I/O	USART1_TX	
121	PA10	I/O	USART1_RX	
125	VCAP_2	Power		
126	VSS	Power		
127	VDD	Power		
135	VSS	Power		
136	VDD	Power		
148	VSS	Power		
149	VDD	Power		
158	VSS	Power		
159	VDD	Power		
164	PB6	I/O	I2C1_SCL	
165	PB7	I/O	I2C1_SDA	
166	BOOT0	Boot		
171	PDR_ON	Reset		
172	VDD	Power		

^{*} The pin is affected with an I/O function

4. Clock Tree Configuration

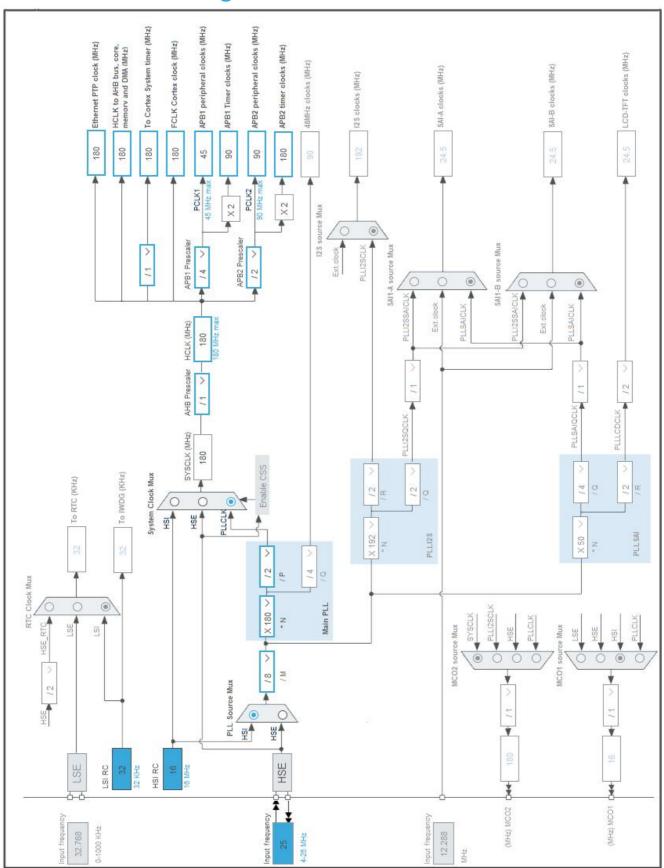

1. Power Consumption Calculator report

1.1. Microcontroller Selection

Series	STM32F4
Line	STM32F429/439
MCU	STM32F429IGTx
Datasheet	DS9405_Rev9

1.2. Parameter Selection

Temperature	25
Vdd	3.3

1.3. Battery Selection

Battery	Li-SOCL2(A3400)
Capacity	3400.0 mAh
Self Discharge	0.08 %/month
Nominal Voltage	3.6 V
Max Cont Current	100.0 mA
Max Pulse Current	200.0 mA
Cells in series	1
Cells in parallel	1


1.4. Sequence

Step	Step1	Step2
Step	Step i	Stepz
Mode	RUN	STOP UDM (Under Drive)
Vdd	3.3	3.3
Voltage Source	Battery	Battery
Range	Scale1-High	No Scale
Fetch Type	FLASH	n/a
CPU Frequency	180 MHz	0 Hz
Clock Configuration	HSE PLL	Regulator LP Flash-PwrDwn
Clock Source Frequency	4 MHz	0 Hz
Peripherals		
Additional Cons.	0 mA	0 mA
Average Current	57 mA	100 μΑ
Duration	0.1 ms	0.9 ms
DMIPS	225.0	0.0
Ta Max	97.85	104.99
Category	In DS Table	In DS Table

1.5. Results

Sequence Time	1 ms	Average Current	5.79 mA
Battery Life	24 days, 10 hours	Average DMIPS	225.0 DMIPS

1.6. Chart

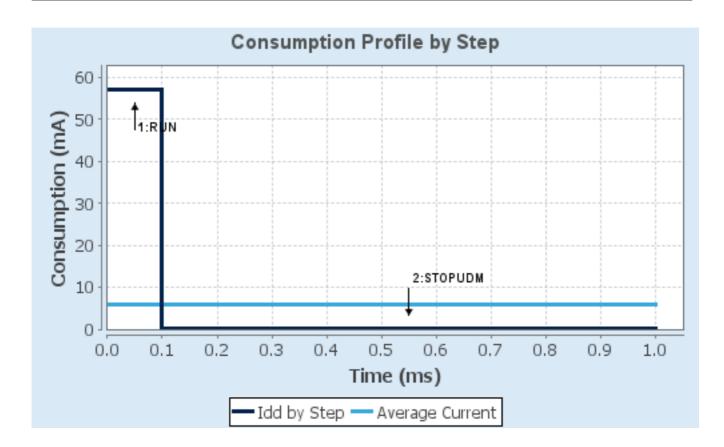

2. Software Project

2.1. Project Settings

Name	Value
Project Name	LCD_Driver
Project Folder	K:\Data\GitFiles\Keil\STM32_CubeIDE\LCD_Driver
Toolchain / IDE	STM32CubeIDE
Firmware Package Name and Version	STM32Cube FW_F4 V1.28.1
Application Structure	Advanced
Generate Under Root	Yes
Do not generate the main()	No
Minimum Heap Size	0x200
Minimum Stack Size	0x400

2.2. Code Generation Settings

Name	Value
STM32Cube MCU packages and embedded software	Copy only the necessary library files
Generate peripheral initialization as a pair of '.c/.h' files	Yes
Backup previously generated files when re-generating	No
Keep User Code when re-generating	Yes
Delete previously generated files when not re-generated	Yes
Set all free pins as analog (to optimize the power	No
consumption)	
Enable Full Assert	No

2.3. Advanced Settings - Generated Function Calls

Rank	Function Name	Peripheral Instance Name
1	SystemClock_Config	RCC
2	MX_GPIO_Init	GPIO
3	MX_DMA_Init	DMA
4	MX_USART1_UART_Init	USART1
5	MX_TIM3_Init	TIM3
6	MX_I2C1_Init	I2C1
7	MX_TIM5_Init	TIM5
8	MX_SPI1_Init	SPI1

3. Peripherals and Middlewares Configuration

3.1. I2C1 I2C: I2C

3.1.1. Parameter Settings:

Master Features:

I2C Speed Mode Fast Mode *

I2C Clock Speed (Hz) 400000

Fast Mode Duty Cycle Duty cycle Tlow/Thigh = 2

Timing configuration:

Coefficient of Digital Filter 0

Analog Filter Enabled

Slave Features:

Clock No Stretch Mode Disabled
Primary Address Length selection 7-bit
Dual Address Acknowledged Disabled
Primary slave address 0
General Call address detection Disabled

3.2. RCC

High Speed Clock (HSE): Crystal/Ceramic Resonator

3.2.1. Parameter Settings:

System Parameters:

VDD voltage (V) 3.3
Instruction Cache Enabled
Prefetch Buffer Enabled
Data Cache Enabled

Flash Latency(WS) 5 WS (6 CPU cycle)

RCC Parameters:

HSI Calibration Value 16

TIM Prescaler Selection Disabled

HSE Startup Timout Value (ms) 100

LSE Startup Timout Value (ms) 5000

Power Parameters:

Power Regulator Voltage Scale Power Regulator Voltage Scale 1

Power Over Drive Enabled

3.3. SPI1

Mode: Full-Duplex Master

3.3.1. Parameter Settings:

Basic Parameters:

Frame Format Motorola

Data Size 8 Bits

First Bit MSB First

Clock Parameters:

Prescaler (for Baud Rate) 32 *

Baud Rate 2.8125 MBits/s *

Clock Polarity (CPOL) High *
Clock Phase (CPHA) 2 Edge *

Advanced Parameters:

CRC Calculation Disabled
NSS Signal Type Software

3.4. SYS

Timebase Source: SysTick

3.5. TIM3

Clock Source : Internal Clock

3.5.1. Parameter Settings:

Counter Settings:

Prescaler (PSC - 16 bits value) 900-1 *

Counter Mode Up

Counter Period (AutoReload Register - 16 bits value) 2000-1 *

Internal Clock Division (CKD) No Division auto-reload preload Disable

Trigger Output (TRGO) Parameters:

Master/Slave Mode (MSM bit)

Disable (Trigger input effect not delayed)

Trigger Event Selection Reset (UG bit from TIMx_EGR)

3.6. TIM5

Channel2: PWM Generation CH2

3.6.1. Parameter Settings:

Counter Settings:

Prescaler (PSC - 16 bits value) 900-1 *

Counter Mode Up

Counter Period (AutoReload Register - 32 bits value) 2000-1 *

Internal Clock Division (CKD) No Division auto-reload preload Disable

Trigger Output (TRGO) Parameters:

Master/Slave Mode (MSM bit) Disable (Trigger input effect not delayed)

Trigger Event Selection Reset (UG bit from TIMx_EGR)

PWM Generation Channel 2:

Mode PWM mode 1

Pulse (32 bits value) 50 *

Output compare preload Enable

Fast Mode Enable *

CH Polarity High

3.7. USART1

Mode: Asynchronous

3.7.1. Parameter Settings:

Basic Parameters:

Baud Rate 115200

Word Length 8 Bits (including Parity)

Parity None Stop Bits 1

Advanced Parameters:

Data Direction Receive and Transmit

Over Sampling 16 Samples

* User modified value		

4. System Configuration

4.1. GPIO configuration

IP	Pin	Signal	GPIO mode	GPIO pull/up pull down	Max Speed	User Label
I2C1	PB6	I2C1_SCL	Alternate Function Open Drain	No pull-up and no pull-down	Very High	
	PB7	I2C1_SDA	Alternate Function Open Drain	No pull-up and no pull-down	Very High	
RCC	PH0/OSC_I	RCC_OSC_IN	n/a	n/a	n/a	
	PH1/OSC_O UT	RCC_OSC_OUT	n/a	n/a	n/a	
SPI1	PA5	SPI1_SCK	Alternate Function Push Pull	No pull-up and no pull-down	Very High *	
	PA6	SPI1_MISO	Alternate Function Push Pull	No pull-up and no pull-down	Very High *	
	PA7	SPI1_MOSI	Alternate Function Push Pull	No pull-up and no pull-down	Very High *	
TIM5	PH11	TIM5_CH2	Alternate Function Push Pull	No pull-up and no pull-down	Low	
USART1	PA9	USART1_TX	Alternate Function Push Pull	No pull-up and no pull-down	Very High	
	PA10	USART1_RX	Alternate Function Push Pull	No pull-up and no pull-down	Very High *	
GPIO	PA1	GPIO_Output	Output Push Pull	Pull-up *	Very High	LCD_LED
	PA2	GPIO_Output	Output Push Pull	Pull-up *	Very High	LCD_SCL
	PA3	GPIO_Output	Output Push Pull	Pull-up *	Very High	LCD_SDA
	PA4	GPIO_Output	Output Push Pull	Pull-up *	Very High	LCD_RS
	PB10	GPIO_Output	Output Push Pull	Pull-up *	Very High	LCD_RST
	PB11	GPIO_Output	Output Push Pull	Pull-up *	Very High	LCD_CS
	PH10	GPIO_Output	Output Push Pull	Pull-up *	Very High	LED_RED

LCD_Driver Project
Configuration Report

4.2. DMA configuration

DMA request	Stream	Direction	Priority
USART1_RX	DMA2_Stream2	Peripheral To Memory	Low
USART1_TX	DMA2_Stream7	Memory To Peripheral	Low
MEMTOMEM	DMA2_Stream1	Memory To Memory	Low
I2C1_RX	DMA1_Stream0	Peripheral To Memory	Low
I2C1_TX	DMA1_Stream6	Memory To Peripheral	Low
SPI1_RX	DMA2_Stream0	Peripheral To Memory	Low
SPI1_TX	DMA2_Stream3	Memory To Peripheral	Low

USART1_RX: DMA2_Stream2 DMA request Settings:

Mode: Normal
Use fifo: Disable
Peripheral Increment: Disable
Memory Increment: Enable *
Peripheral Data Width: Byte
Memory Data Width: Byte

USART1_TX: DMA2_Stream7 DMA request Settings:

Mode: Normal
Use fifo: Disable
Peripheral Increment: Disable
Memory Increment: Enable *
Peripheral Data Width: Byte
Memory Data Width: Byte

MEMTOMEM: DMA2_Stream1 DMA request Settings:

Mode: Normal
Use fifo: Enable *

FIFO Threshold: Full

Src Memory Increment: Enable *

Dst Memormy Increment: Enable *

Src Memory Data Width: Byte

Dst Memormy Data Width: Byte Src Memory Burst Size: Single Dst Memormy Burst Size: Single

I2C1_RX: DMA1_Stream0 DMA request Settings:

Mode: Normal
Use fifo: Disable
Peripheral Increment: Disable
Memory Increment: Enable *

Peripheral Data Width: Byte
Memory Data Width: Byte

I2C1_TX: DMA1_Stream6 DMA request Settings:

Mode: Normal
Use fifo: Disable
Peripheral Increment: Disable
Memory Increment: Enable *
Peripheral Data Width: Byte
Memory Data Width: Byte

SPI1_RX: DMA2_Stream0 DMA request Settings:

Mode: Normal
Use fifo: Disable
Peripheral Increment: Disable
Memory Increment: Enable *
Peripheral Data Width: Byte

Memory Data Width:

SPI1_TX: DMA2_Stream3 DMA request Settings:

Byte

Mode: Normal
Use fifo: Disable
Peripheral Increment: Disable
Memory Increment: Enable **

Peripheral Data Width: Byte
Memory Data Width: Byte

4.3. NVIC configuration

4.3.1. NVIC

Interrupt Table	Enable	Preenmption Priority	SubPriority	
Non maskable interrupt	true	0	0	
Hard fault interrupt	true	0	0	
Memory management fault	true	0	0	
Pre-fetch fault, memory access fault	true	0	0	
Undefined instruction or illegal state	true	0	0	
System service call via SWI instruction	true	0	0	
Debug monitor	true	0	0	
Pendable request for system service	true	0	0	
System tick timer	true	0	0	
DMA1 stream0 global interrupt	true	0	0	
DMA1 stream6 global interrupt	true	0	0	
TIM3 global interrupt	true	0	0	
I2C1 event interrupt	true	0	0	
I2C1 error interrupt	true	0	0	
SPI1 global interrupt	true	0	0	
USART1 global interrupt	true	0	0	
DMA2 stream0 global interrupt	true	0	0	
DMA2 stream2 global interrupt	true	0	0	
DMA2 stream3 global interrupt	true	0	0	
DMA2 stream7 global interrupt	true	0	0	
PVD interrupt through EXTI line 16	unused			
Flash global interrupt	unused			
RCC global interrupt	unused			
TIM5 global interrupt	unused			
DMA2 stream1 global interrupt	unused			
FPU global interrupt		unused		

4.3.2. NVIC Code generation

Enabled interrupt Table	Select for init	Generate IRQ	Call HAL handler
	sequence ordering	handler	
Non maskable interrupt	false	true	false
Hard fault interrupt	false	true	false
Memory management fault	false	true	false
Pre-fetch fault, memory access fault	false	true	false
Undefined instruction or illegal state	false	true	false
System service call via SWI instruction	false	true	false
Debug monitor	false	true	false

Enabled interrupt Table	Select for init sequence ordering	Generate IRQ handler	Call HAL handler
Pendable request for system service	false	true	false
System tick timer	false	true	true
DMA1 stream0 global interrupt	false	true	true
DMA1 stream6 global interrupt	false	true	true
TIM3 global interrupt	false	true	true
I2C1 event interrupt	false	true	true
I2C1 error interrupt	false	true	true
SPI1 global interrupt	false	true	true
USART1 global interrupt	false	true	true
DMA2 stream0 global interrupt	false	true	true
DMA2 stream2 global interrupt	false	true	true
DMA2 stream3 global interrupt	false	true	true
DMA2 stream7 global interrupt	false	true	true

^{*} User modified value

5. System Views

5.1. Category view

5.1.1. Current



6. Docs & Resources

Type Link

BSDL files https://www.st.com/resource/en/bsdl_model/stm32f427-437_429-

439_bsdl.zip

IBIS models https://www.st.com/resource/en/ibis_model/stm32f427-437_429-

439_ibis.zip

System View https://www.st.com/resource/en/svd/stm32f4-svd.zip

Description

Presentations https://www.st.com/resource/en/product_presentation/stm32-

stm8_embedded_software_solutions.pdf

Presentations https://www.st.com/resource/en/product_presentation/stm32_eval-

tools_portfolio.pdf

Presentations https://www.st.com/resource/en/product_presentation/stm32_stm8_functi

onal-safety-packages.pdf

Presentations https://www.st.com/resource/en/product_presentation/stm32-

stm8_software_development_tools.pdf

Presentations https://www.st.com/resource/en/product_presentation/microcontrollers-

stm32-family-overview.pdf

Presentations https://www.st.com/resource/en/product_presentation/microcontrollers-

stm32h7rs-lines-overview.pdf

Brochures https://www.st.com/resource/en/brochure/products-and-solutions-for-plcs-

and-smart-i-os.pdf

Flyers https://www.st.com/resource/en/flyer/flstm32nucleo.pdf

Flyers https://www.st.com/resource/en/flyer/flstmcsuite.pdf

Flyers https://www.st.com/resource/en/flyer/flstm32trust.pdf

Flyers https://www.st.com/resource/en/flyer/flstm32gui.pdf

Product https://www.st.com/resource/en/certification_document/stm32_authenticat

Certifications ion_can.pdf

Application Notes https://www.st.com/resource/en/application_note/an1709-emc-design-

guide-for-stm8-stm32-and-legacy-mcus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an2606-stm32-

- microcontroller-system-memory-boot-mode-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an2639-soldering-recommendations-and-package-information-for-leadfree-ecopack-mcus-and-mpus-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an2945-stm8s-and-stm32-mcus-a-consistent-832bit-product-line-for-painless-migration-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an3070-managing-the-driver-enable-signal-for-rs485-and-iolink-communications-with-the-stm32s-usart-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an3126-audio-and-waveform-generation-using-the-dac-in-stm32-products-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an3154-can-protocol-used-in-the-stm32-bootloader-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an3155-usart-protocol-used-in-the-stm32-bootloader-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an3156-usb-dfu-protocol-used-in-the-stm32-bootloader-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an3364-migration-and-compatibility-guidelines-for-stm32-microcontroller-applications-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an3371-using-the-hardware-realtime-clock-rtc-in-stm32-f0-f2-f3-f4-and-l1-series-of-mcus-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an3997-audio-playback-and-recording-using-the-stm32f4discovery-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an3998-pdm-audio-software-decoding-on-stm32-microcontrollers-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4031-using-the-stm32f2-stm32f4-and-stm32f7-series-dma-controller-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4073-how-to-improve-

- adc-accuracy-when-using-stm32f2xx-and-stm32f4xx-microcontrollers-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4221-i2c-protocol-used-in-the-stm32-bootloader-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4286-spi-protocol-used-in-the-stm32-bootloader-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4488-getting-started-with-stm32f4xxxx-mcu-hardware-development-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4547-migrating-from-stm32f407xx417xx-to-stm32f427xx429xx437xx439xx-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4566-extending-the-dac-performance-of-stm32-microcontrollers-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4640-peripherals-interconnections-on-stm32f4057xx-stm32f4157xx-stm32f42xxx-stm32f43xxx-stm32f446xx-and-stm32f469479xx-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4655-virtually-increasing-the-number-of-serial-communication-peripherals-in-stm32-applications-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4658-migration-of-applications-from-stm32f429439-lines-to-stm32f446-line-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4660-migration-of-microcontroller-applications-from-stm32f42xxxf43xxx-devices-to-stm32f7-series-devices-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4675-migration-of-microcontroller-applications-from-stm32f42xxxstm32f43xxx-to-stm32f469xxstm32f479xx-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4739-stm32cube-firmware-examples-for-stm32f4-series-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4750-handling-of-soft-errors-in-stm32-applications-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4776-generalpurpose-

- timer-cookbook-for-stm32-microcontrollers-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4803-highspeed-si-simulations-using-ibis-and-boardlevel-simulations-using-hyperlynx-si-on-stm32-mcus-and-mpus-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4850-stm32-mcusspreadspectrum-clock-generation-principles-properties-andimplementation-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4989-stm32-microcontroller-debug-toolbox-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4995-using-anelectromyogram-technique-to-detect-muscle-activitystmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an5020-digital-camera-interface-dcmi-on-stm32-mcus-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an5027-interfacing-pdm-digital-microphones-using-stm32-mcus-and-mpus-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an5073-receiving-spdif-audio-stream-with-the-stm32f4f7h7-series-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4899-stm32-microcontroller-gpio-hardware-settings-and-lowpower-consumption-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an5612-esd-protection-of-stm32-mcus-and-mpus-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4838-introduction-to-memory-protection-unit-management-on-stm32-mcus-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an5688-migrating-microcontroller-applications-from-stm32f427437-and-stm32f429439-to-stm32h573563-and-stm32h562-mcus-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4879-introduction-to-usb-hardware-and-pcb-guidelines-using-stm32-mcus-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an5225-introduction-to-

- usb-typec-power-delivery-for-stm32-mcus-and-mpusstmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an2834-how-to-optimize-the-adc-accuracy-in-the-stm32-mcus-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an5537-how-to-use-adcoversampling-techniques-to-improve-signaltonoise-ratio-on-stm32-mcusstmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an5036-guidelines-for-thermal-management-on-stm32-applications-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4230-introduction-to-random-number-generation-validation-using-the-nist-statistical-test-suite-for-stm32-mcus-and-mpus-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an2867-guidelines-for-oscillator-design-on-stm8afals-and-stm32-mcusmpus-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4013-introduction-to-timers-for-stm32-mcus-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4277-how-to-use-pwm-shutdown-for-motor-control-and-digital-power-conversion-on-stm32-mcus-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4759-introduction-to-using-the-hardware-realtime-clock-rtc-and-the-tamper-management-unit-tamp-with-stm32-mcus-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4861-introduction-to-lcdtft-display-controller-ltdc-on-stm32-mcus-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4908-getting-startedwith-usart-automatic-baud-rater-detection-for-stm32-mcusstmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an5156-introduction-to-security-for-stm32-mcus-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an5543-guidelines-for-enhanced-spi-communication-on-stm32-mcus-and-mpus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an1202_freertos_guide-for related Tools freertos-guide-stmicroelectronics.pdf

& Software

Application Notes https://www.st.com/resource/en/application_note/an1602_semihosting_in for related Tools __truestudio-how-to-do-semihosting-in-truestudio-stmicroelectronics.pdf & Software

Application Notes https://www.st.com/resource/en/application_note/an1801_stm32cubeprog for related Tools rammer_in_truestudio-installing-stm32cubeprogrammer-in-truestudio-

& Software stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/atollic_editing_keyboard for related Tools _shortcuts-atollic-editing-keyboard-shortcuts-stmicroelectronics.pdf

& Software

Application Notes https://www.st.com/resource/en/application_note/iar_to_atollic_truestudio for related Tools _migration_guide-truestudio-for-arm-migration-guide-iar-embedded-

& Software workbench-to-truestudio-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/stm32cubemx_installatio

for related Tools n_in_truestudio-stm32cubemx-installation-in-truestudio-

& Software stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an2656-stm32f10xxx-

for related Tools Icd-glass-driver-firmware-stmicroelectronics.pdf

& Software

Application Notes https://www.st.com/resource/en/application_note/an2790-tft-lcd-

for related Tools interfacing-with-the-highdensity-stm32f10xxx-fsmc-stmicroelectronics.pdf

& Software

Application Notes https://www.st.com/resource/en/application_note/an3078-stm32-for related Tools inapplication-programming-over-the-ic-bus-stmicroelectronics.pdf & Software

Application Notes https://www.st.com/resource/en/application_note/an3116-stm32s-adcfor related Tools modes-and-their-applications-stmicroelectronics.pdf

& Software

Application Notes https://www.st.com/resource/en/application_note/an3174-implementing-for related Tools receivers-for-infrared-remote-control-protocols-using-stm32f10xxx-

& Software microcontrollers-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an3241-qvga-tftlcd-

for related Tools direct-drive-using-the-stm32f10xx-fsmc-peripheral-stmicroelectronics.pdf

& Software

Application Notes https://www.st.com/resource/en/application_note/an3307-guidelines-for-

for related Tools obtaining-iec-60335-class-b-certification-for-any-stm32-application-

& Software stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an3965-

for related Tools stm32f40xstm32f41x-inapplication-programming-using-the-usart-

& Software stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an3969-eeprom-

for related Tools emulation-in-stm32f40xstm32f41x-microcontrollers-stmicroelectronics.pdf

& Software

Application Notes https://www.st.com/resource/en/application_note/an3990-upgrading-

for related Tools stm32f4discovery-board-firmware-using-a-usb-key-stmicroelectronics.pdf

& Software

Application Notes https://www.st.com/resource/en/application_note/an4044-floating-point-

for related Tools unit-demonstration-on-stm32-microcontrollers-stmicroelectronics.pdf

& Software

Application Notes https://www.st.com/resource/en/application_note/an4323-getting-started-

for related Tools with-stemwin-library-stmicroelectronics.pdf

& Software

Application Notes https://www.st.com/resource/en/application_note/an4365-using-stm32f4-

for related Tools mcu-power-modes-with-best-dynamic-efficiency-stmicroelectronics.pdf

& Software

Application Notes https://www.st.com/resource/en/application_note/an4435-guidelines-for-

for related Tools obtaining-ulcsaiec-607301603351-class-b-certification-in-any-stm32-

& Software application-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an4457-implementing-

for related Tools an-emulated-uart-on-stm32f4-microcontrollers-stmicroelectronics.pdf

& Software

Application Notes https://www.st.com/resource/en/application_note/an4499-stm32--

for related Tools nrf51822-bluetooth-low-energy-system-solution-stmicroelectronics.pdf

& Software

Application Notes https://www.st.com/resource/en/application_note/an4657-stm32-

for related Tools inapplication-programming-iap-using-the-usart-stmicroelectronics.pdf

& Software

Application Notes https://www.st.com/resource/en/application_note/an4666-parallel-for related Tools synchronous-transmission-using-gpio-and-dma-stmicroelectronics.pdf

& Software

Application Notes https://www.st.com/resource/en/application_note/an4678-full-duplex-spi-

for related Tools emulation-for-stm32f4-microcontrollers-stmicroelectronics.pdf

& Software

Application Notes https://www.st.com/resource/en/application_note/an4701-proprietary-for related Tools code-readout-protection-on-microcontrollers-of-the-stm32f4-series-

& Software stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an4739-stm32cube-

for related Tools firmware-examples-for-stm32f4-series-stmicroelectronics.pdf

& Software

Application Notes https://www.st.com/resource/en/application_note/an4758-proprietary-for related Tools code-readout-protection-on-stm32l4-stm32l4-stm32g4-and-stm32wb-

& Software series-mcus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an4841-digital-signal-for related Tools processing-for-stm32-microcontrollers-using-cmsis-stmicroelectronics.pdf

& Software

Application Notes https://www.st.com/resource/en/application_note/an4968-proprietary-for related Tools code-read-out-protection-pcrop-on-stm32f72xxx-and-stm32f73xxx-

& Software microcontrollers-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an5056-integration-

for related Tools guide-for-the-xcubesbsfu-stm32cube-expansion-package-

& Software stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an5360-getting-started-

for related Tools with-projects-based-on-the-stm32mp1-series-in-stm32cubeide-

& Software stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an5361-getting-started-

for related Tools with-projects-based-on-dualcore-stm32h7-microcontrollers-in-

& Software stm32cubeide-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an5394-getting-started-

for related Tools with-projects-based-on-the-stm32l5-series-in-stm32cubeide-

& Software stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an5418-how-to-build-a-for related Tools simple-usbpd-sink-application-with-stm32cubemx-stmicroelectronics.pdf & Software

Application Notes https://www.st.com/resource/en/application_note/an5426-migrating-for related Tools graphics-middleware-projects-from-stm32cubemx-540-to-stm32cubemx-

& Software 550-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an5464-position-control-

for related Tools of-a-threephase-permanent-magnet-motor-using-xcubemcsdk-or-

& Software xcubemcsdkful-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an5564-getting-started-

for related Tools with-projects-based-on-dualcore-stm32wl-microcontrollers-in-

& Software stm32cubeide-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an5698-adapting-the-for related Tools xcubestl-functional-safety-package-for-stm32-iec-61508-compliant-to-

& Software other-safety-standards-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an5731-stm32cubemx-

for related Tools and-stm32cubeide-threadsafe-solution-stmicroelectronics.pdf

& Software

Application Notes https://www.st.com/resource/en/application_note/an4502-stm32-

for related Tools smbuspmbus-expansion-package-for-stm32cube-stmicroelectronics.pdf

& Software

Application Notes https://www.st.com/resource/en/application_note/an5952-how-to-use-

for related Tools cmake-in-stm32cubeide-stmicroelectronics.pdf

& Software

Application Notes https://www.st.com/resource/en/application_note/an5054-how-to-perform-for related Tools secure-programming-using-stm32cubeprogrammer-stmicroelectronics.pdf

& Software

Errata Sheets https://www.st.com/resource/en/errata_sheet/es0206-stm32f427437-and-

stm32f429439-device-errata-stmicroelectronics.pdf

Datasheet https://www.st.com/resource/en/datasheet/dm00071990.pdf

Programming https://www.st.com/resource/en/programming_manual/pm0214-stm32-Manuals cortexm4-mcus-and-mpus-programming-manual-stmicroelectronics.pdf

Reference https://www.st.com/resource/en/reference_manual/rm0090-

Manuals stm32f405415-stm32f407417-stm32f427437-and-stm32f429439-

advanced-armbased-32bit-mcus-stmicroelectronics.pdf **Technical Notes** https://www.st.com/resource/en/technical_note/tn0516-overview-of-the-& Articles stm32f0xf100xxf103xx-and-stm32f2xxf30xf4xx-mcus-pmsm-singledualfoc-sdk-v40-stmicroelectronics.pdf **Technical Notes** https://www.st.com/resource/en/technical_note/tn1163-description-of-& Articles wlcsp-for-microcontrollers-and-recommendations-for-its-usestmicroelectronics.pdf **Technical Notes** https://www.st.com/resource/en/technical note/tn1204-tape-and-reel-& Articles shipping-media-for-stm32-microcontrollers-in-bga-packagesstmicroelectronics.pdf **Technical Notes** https://www.st.com/resource/en/technical note/tn1205-tape-and-reel-& Articles shipping-media-for-stm8-and-stm32-microcontrollers-in-fpn-packagesstmicroelectronics.pdf Technical Notes https://www.st.com/resource/en/technical_note/tn1206-tape-and-reel-& Articles shipping-media-for-stm8-and-stm32-microcontrollers-in-qfp-packagesstmicroelectronics.pdf **Technical Notes** https://www.st.com/resource/en/technical_note/tn1207-tape-and-reel-& Articles shipping-media-for-stm8-and-stm32-microcontrollers-in-so-packagesstmicroelectronics.pdf **Technical Notes** https://www.st.com/resource/en/technical_note/tn1208-tape-and-reel-& Articles shipping-media-for-stm8-and-stm32-microcontrollers-in-tssop-and-ssoppackages-stmicroelectronics.pdf **Technical Notes** https://www.st.com/resource/en/technical note/tn1433-reference-device-& Articles marking-schematics-for-stm32-microcontrollers-and-microprocessorsstmicroelectronics.pdf **Technical Notes** https://www.st.com/resource/en/technical_note/tn1489-security-bulletin-& Articles tn1489stpsirt-physical-attacks-on-stm32-and-stm32cube-firmwarestmicroelectronics.pdf