



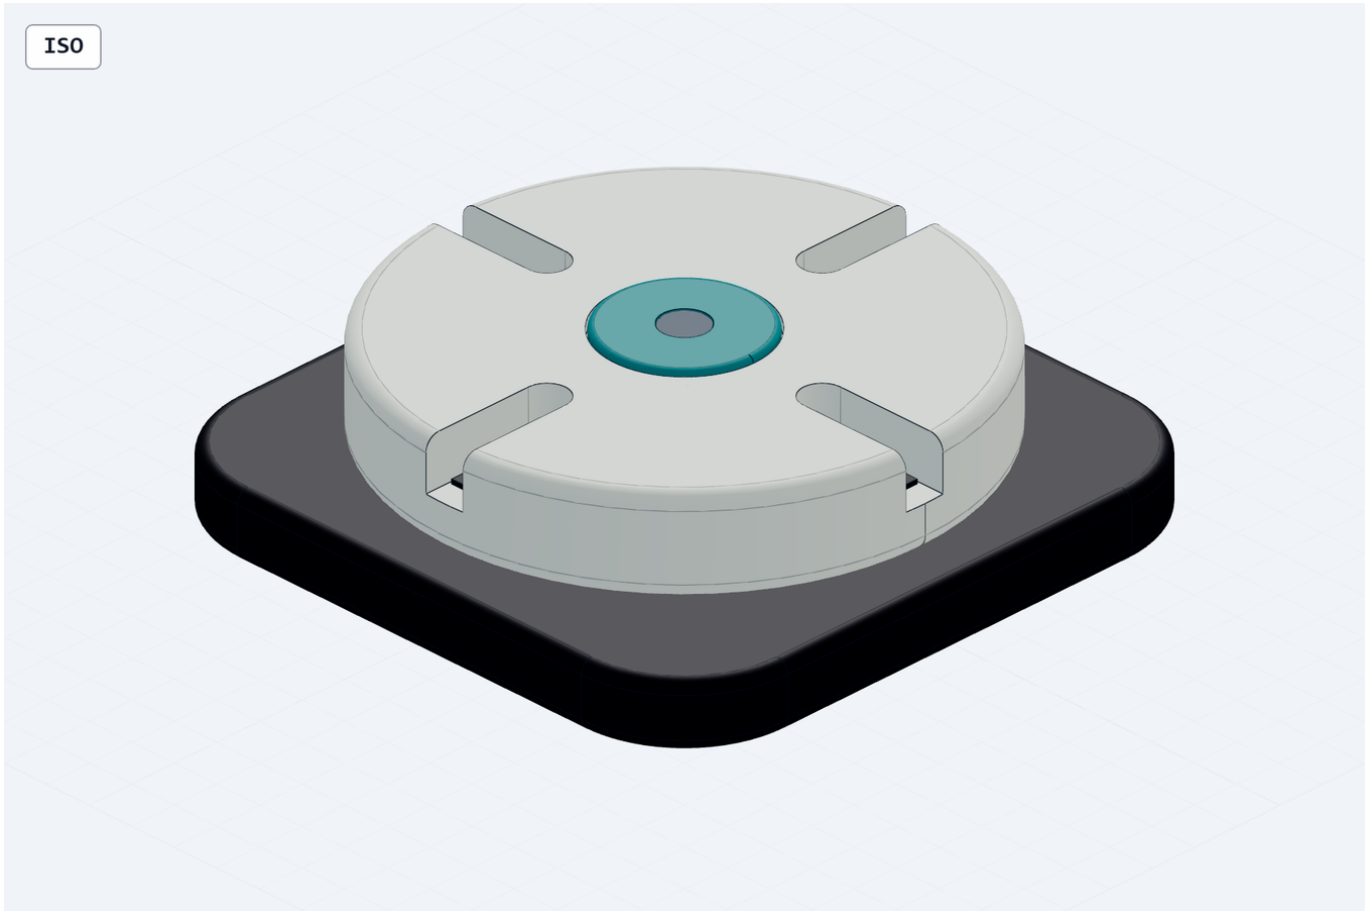

ASSEMBLED CAD

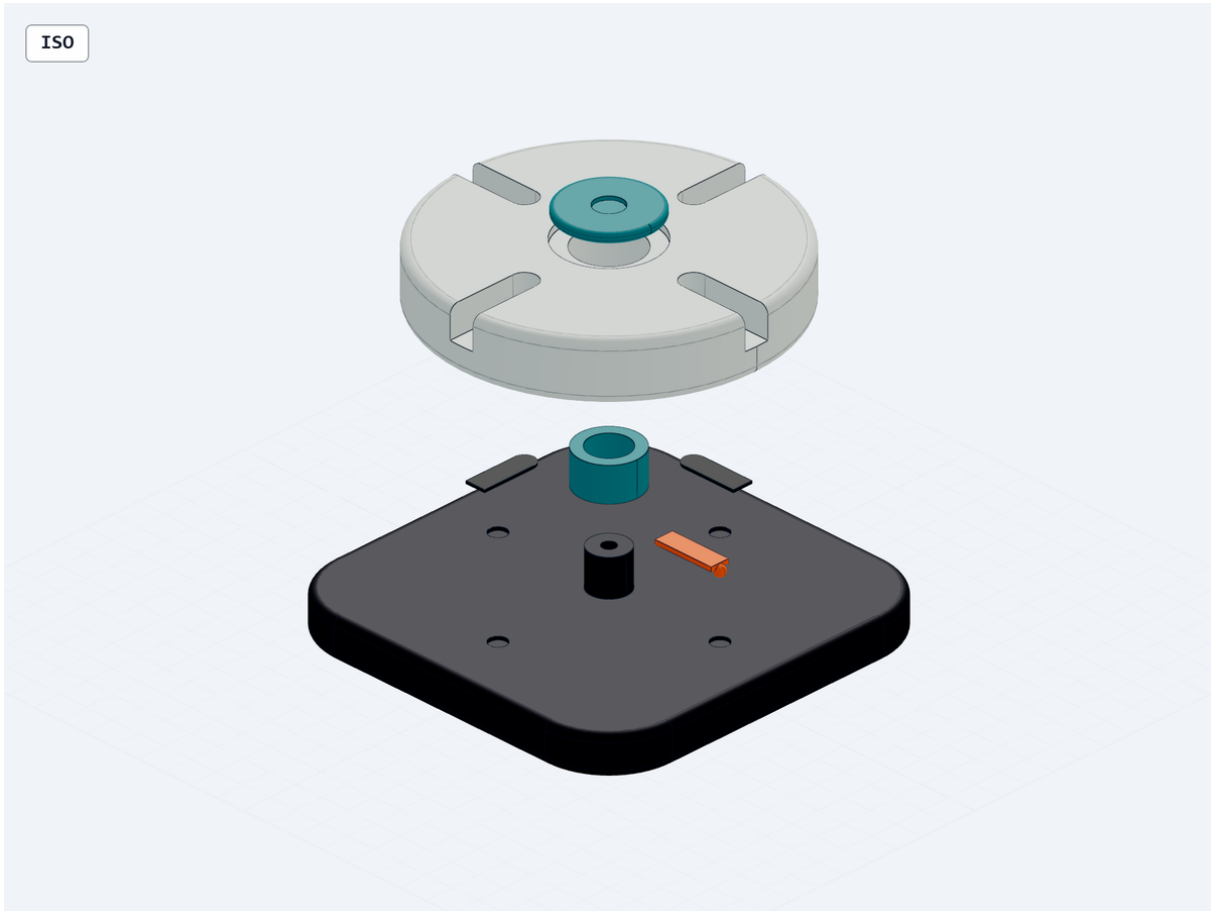

EXPLODED COMPONENT HIERARCHY

CONTROLLED CAD ENVELOPE

- 96 × 96 × 26.7 mm nominal envelope
- 84 mm circular rotor · 14.8 mm high
- 4 × radial U-slot · 6.4 × 18 mm (TBD cable fit)
- 1.2 mm visual/axial shadow gap
- 0/90/180/270° index states + 45° intermediate review

HANDOFF BOUNDARY

- STEP is authoritative; STL/GLB/DXF/PDF are derivatives.
- M4 hardware and receiving insert remain supplier TBD.
- Cable fit, detent force/life, FDM compensation, friction and tip stability require physical tests.
- External appearance approval has not been claimed.
- See BOM, interface-control.csv, TBD-register.md and DRC reports.