

PANEL OUTPUTS: 3.3V, BOTTOM CONNECTOR


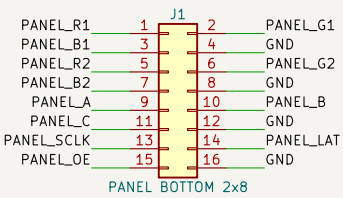


Figure 1 displays 16 diagrams arranged in a 4x4 grid, illustrating the evolution of a 1D Ising chain. Each diagram shows a chain of five spins (S) with arrows indicating their orientation. The diagrams are labeled with a number (0-15) and a letter (A-D). The sequence shows the chain's state at each time step, with the final state (15) being a fully polarized state.

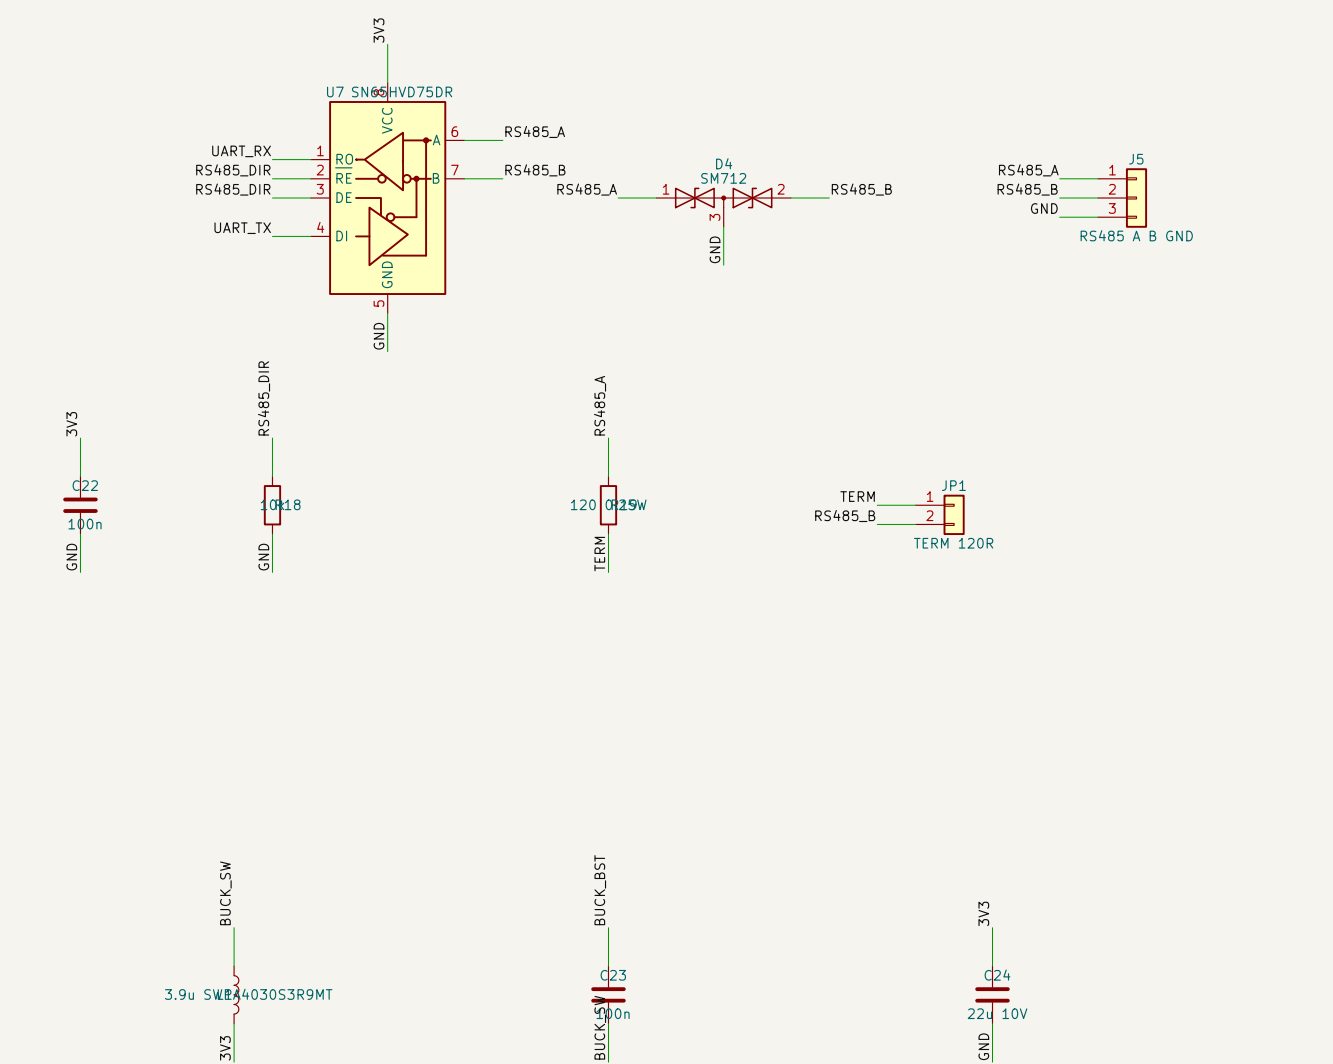

GP2.13: direct 3.3V, no series resistors. GP14 unused; GP23 senses panel power.
RS485: GP0 TX, GP1 RX, GP15 direction. Panel 5V required also for USB programming.
J1 pin 1 = (13.202,15.600) mm from top-left. TOP VIEW. Verify mating height before fabrication.

[illegible]