

JUNO TH TECHNICAL DATA SHEET EN - ZJF201



The Juno IP67 TH is a versatile temperature and humidity sensor featuring mioty® wireless technology for reliable and energy-efficient data transmission over long distances. Thanks to its robust construction and IP67 protection, it is ideal for use in demanding environments. Additionally, the sensor features tilt and damper opening detection with degree-precise adjustment.

VERSION HISTORY

Version	Date	Revision
1.0.0	April 30, 2026	Created

VERSIONS

ITEM CODE	IFM ITEM CODE	FEATURES
S-JUNO-IX-MIOTY-TH	ZJF 201	INDUSTRIAL JUNO IP67 TH Sensor, Temperature and Relative Humidity with Tilt Detection and Door Open Detection mioty®



GENERAL FEATURES

FEATURE	VALUE	UNIT
Dimensions LxWxH	86x86x25	mm
Weight	<200	g
Operating temperature	-25 to +75 (please inquire about extended temperature range. Temperature range is limited by the maximum operating temperature of the primary cells)	°C
Maximum operating temperature of the device	85	°C
Storage temperature (recommended)	15 to +30	°C
Relative humidity during operation	5 to 99	%RH
IP Rating	IP67/IP65	
IK rating	TBD	
Sensors	Temperature, relative humidity, accelerometer	
Traffic light function	No	
Acoustic alarm function	Yes, buzzer	
Provisioning	NFC	
Material	PBT GF20	
NFC antenna	Integrated	
RF antenna	Integrated	
Accelerometer	Yes	
Batteries	Primary cell, replaceable, AA	
Primary cell type	2 x 3.6V LiSOC12 (SAFT LS14500 recommended)	
Housing color	S-JUNO-IX-XXXX light gray	

CONNECTIVITY AND RF SPECIFICATIONS

FEATURE	VALUE	UNIT
RF Standards		MHz
Frequency mioty® EU	868	MHz
Transmit power mioty® EU	14	dBm


SENSOR SPECIFICATION TEMPERATURE

FEATURE	VALUE	UNIT
Measuring range	-40 to +125	°C
Drift (long-term)	<0.03	°C/year
Accuracy	±0.2	°C
Resolution	0.1	°C

Repeatability

0.2


°C

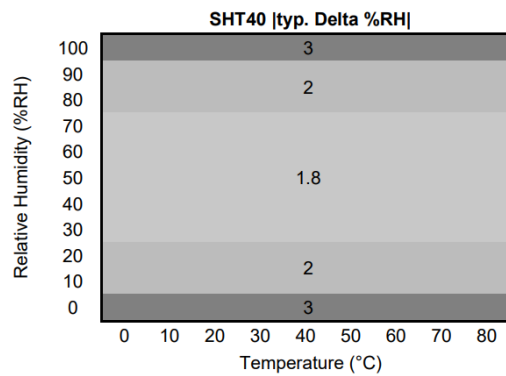


HT_DS_Datasheet_SHT4x_5.pdf

SENSOR SPECIFICATION RELATIVE HUMIDITY

FEATURE	VALUE	UNIT
Measuring Range	0 to +100	%RH
Drift (long-term)	<0.25	%RH/year
Accuracy	±1.8	%RH
Resolution	1	%RH
Repeatability	0.25	%RH

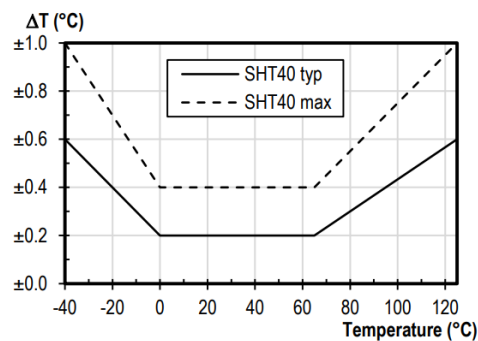

HT_DS_Datasheet_SHT4x_5.pdf

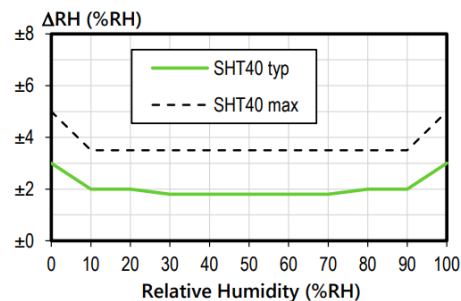

HT_DS_Datasheet_SHT4x_5.pdf

Higher-precision temperature sensors available upon request.


SENSOR SPECIFICATION: TILT

FEATURE	VALUE	UNIT
Measuring range	0 to 360	°
Accuracy	±2°	°
Triggering in low-power mode for door detection	±60	°


SENSOR SPECIFICATION TEMPERATURE ACCELEROMETER

FEATURE	VALUE	UNIT
Measuring Range	-40 to +85	°C
Accuracy	±0.8	°C

TECHNICAL DRAWING

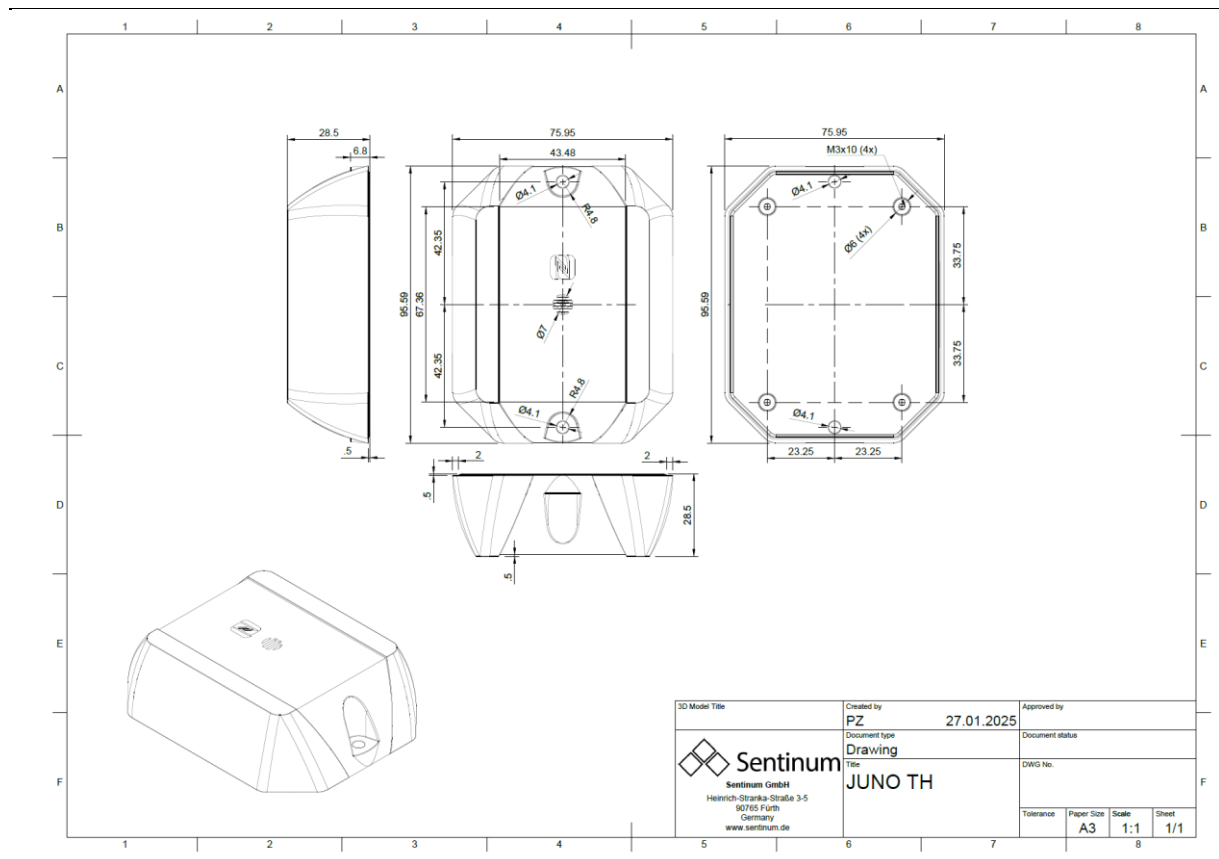

MAGNETIC SWITCH POSITION

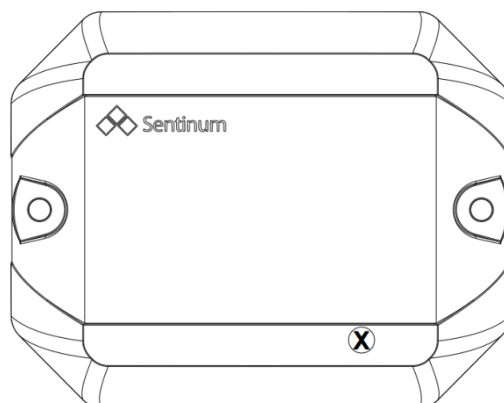

ORIENTATION OF THE AXES OF THE ACCELERATION SENSOR

