


Gaps against run-to-run noise

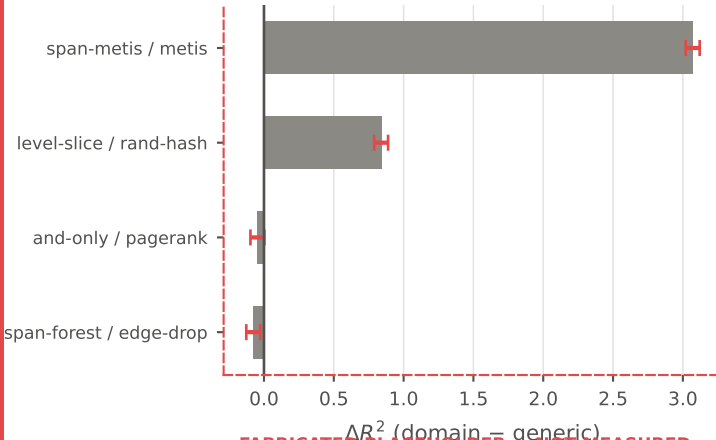

FABRICATED PLACEHOLDER – NOT MEASURED

Bars are measured: the ± 0.05 whiskers are INVENTED, there is no second seed. Every configuration is trained exactly once, so no RQ4 gap can be distinguished from run-to-run noise. Cheapest sufficient fix: 3 seeds on the four RQ4 pairings only (8 configurations x 3 seeds), not on the whole sweep.