



HP Insight Remote Support

Solution Support FAQ

Legal Notices

Warranty

The only warranties for HP products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.

The information contained herein is subject to change without notice.

Restricted Rights Legend

Confidential computer software. Valid license from HP required for possession, use or copying. Consistent with FAR 12.211 and 12.212, Commercial Computer Software, Computer Software Documentation, and Technical Data for Commercial Items are licensed to the U.S. Government under vendor's standard commercial license.

Copyright Notices

© Copyright 2014 Hewlett-Packard Development Company, L.P.

Trademark Notices

Microsoft® and Windows® are U.S. registered trademarks of Microsoft Corporation.

Frequently Asked Questions

Note: This FAQ assumes some familiarity with Insight Remote Support (Insight RS). Please go to <http://www.hp.com/go/insightremotesupport> for an introduction and overview of the support automation tools and capabilities.


Q: What is meant by a Solution? What is meant by a Component?

A: Solution refers to an aggregation of component devices configured together for a specific business purpose. The business solution might be something the Customer has created or it can be purchased directly from HP. HP typically assembles components into one or more orderable SKUs to comprise the overall solution.

The following figure shows an example of a virtualized solution. It is comprised of a top level solution identifier, and consists of several orderable SKUs. Each SKU consists of one or more components, for example one SKU consists of two server nodes, another SKU consists of two switches, and there are several SKUs each of which consists of several disk drives. In this example, Insight RS will recognize the components, such as individual server nodes, storage devices and network switches.

Components refer to one of the devices as part of a solution or SKU, such as a server, a storage SAN, a network switch, etc., and are generally listed in the *Insight Remote Support 7.x Release Notes* found at <http://www.hp.com/go/insightremotesupport/docs>. These devices typically contain multiple Field or Customer Replaceable Units (RUs) such as hard disk drives, memory DIMMs, CPU processors, etc. which may be reported out individually for event monitoring and service delivery repair purposes.

Figure: Example of Solution and Components

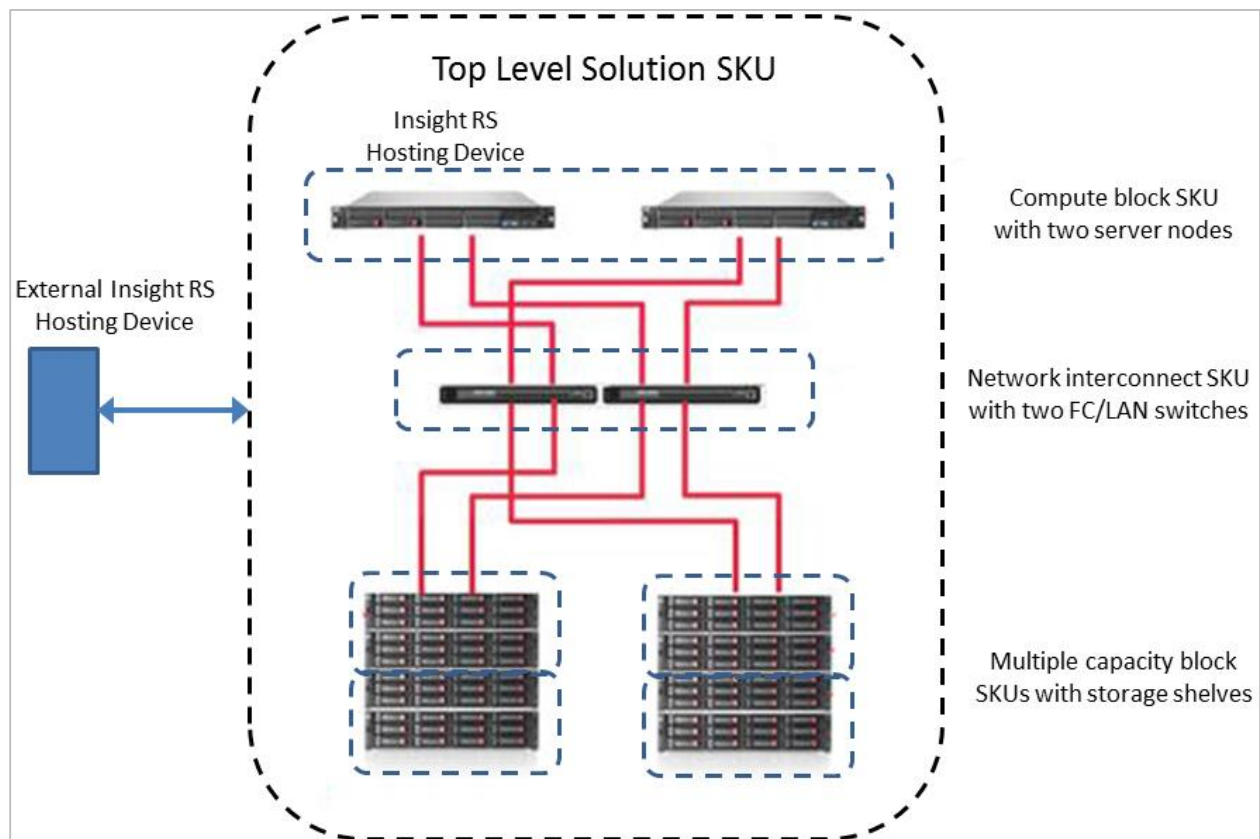

Q: I have a solution which is not listed in the Insight Remote Support 7.x Release Notes. Is the solution supported by Insight RS? Does Insight RS recognize 'solutions'?

A: Insight RS supports solutions at the component level, not directly at the solution level.

Insight RS does not recognize solutions, but rather recognizes components. For solutions, Insight RS will recognize a component, but will not recognize that it is part of a 'solution'.

Component-level support includes registration, entitlement, event monitoring, and data collection from devices such as individual servers, switches, and storage.

Insight RS logs support cases at the component level, and the support case gets routed to the appropriate queue based on the support level entitlement contract or warranty coverage provided at the component level.

The Insight RS client and Insight Online support portal user interfaces display devices and events at the component level, not at the aggregate solution level; as such, components currently aren't associated with a Solution type or with a single instance of a Solution and are not grouped together purposefully to make this apparent.

Note: Some HP Converged Systems or solutions have processes established for Insight RS cases that are logged at the component level to be recognized as part of the specific Converged Systems. See section [What components of my HP Converged Systems will work with Insight RS?](#)

Q: How do I know if the components of my solution may work with Insight RS?

A: For solutions in general or mixed customer-built environments, use the following steps to determine if the components are supported within the solution.

1. Is the product family and model supported for Hosting Device and monitored devices? See the *Insight Remote Support 7.x Release Notes* at <http://www.hp.com/go/insightremotesupport/docs>
2. Is the operating system type and version supported? See the *Insight Remote Support 7.x Release Notes* at <http://www.hp.com/go/insightremotesupport/docs>.
3. If virtualization is used, does the Hosting Device or monitored device run a supported virtual OS (host, guest, hypervisor, etc.)? See the *Insight Remote Support 7.x Release Notes* at <http://www.hp.com/go/insightremotesupport/docs>.
4. Is the component configured properly for end point monitoring and collections? See the *Monitored Devices Configuration Guide* at <http://www.hp.com/go/insightremotesupport/docs>.
5. Is the Hosting Device properly configured in the environment? See the *Installation and Configuration Guide* at <http://www.hp.com/go/insightremotesupport/docs>.
6. Does the solution software / configuration or any of the management software/firmware or security settings conflict with Insight RS Hosting Device connectivity to HP? Ensure that your Hosting Device fulfills the access, networking, communication and connectivity requirements as outlined in the *Understanding Installation Process and Requirements* section of the *Insight Remote Support 7.x Release Notes* at <http://www.hp.com/go/insightremotesupport/docs>.
7. Does the solution software / configuration or any of the management software/firmware or security settings conflict with Insight RS Hosting Device connectivity to, and management of, the components being monitored? Check that any applicable solution-specific management software or port settings does not conflict with Insight RS settings documented in the device configuration sections of the *Insight Remote Support Monitored Devices Configuration Guide* at <http://www.hp.com/go/insightremotesupport/docs>.

The remainder of this document is focused on specific configurations that have been tested and where noted supersede the information listed above.

Q: What are some examples of solutions and components of solutions supported by Insight RS?

A: There are several examples of Insight RS working effectively with HP solutions. These include storage appliances and clusters such as StoreVirtual / LeftHand and StoreAll / IBRIX, and Converged Systems. Some of these HP solutions also have business processes to ensure proper case routing at a solution level even though the Insight RS case is identified at the component level. This document covers some specific details about coverage of Insight RS with some of the HP Converged Systems solutions including:

- CloudSystem Matrix
- HP AppSystems for SAP HANA
- HP AppSystem for Microsoft Parallel Data Warehouse (PDW)

See section [What components of my HP Converged Systems will work with Insight RS?](#)

Q: Can I monitor solutions or components of solutions using a Hosting Device outside of the solution environment?

A: Yes, you can. However, in some cases HP recommends that the Hosting Device operate within the environment such as with Cloud System Matrix. (See section [What components of my HP Converged Systems will work with Insight RS?](#))

Referring to [Example of Solution and Components](#), a server within the solution may be designated as the Insight RS Hosting Device. As an alternative the Hosting Device may be placed outside the solution to monitor the environment. This may be useful where the solution software stack interferes with Insight RS or as a convenience to add a solution to an existing Insight RS environment already monitoring a heterogeneous environment.

Q: Does the Insight RS 7.x Hosting Device need to be on the same server as HP SIM?

A: No. Insight RS 7.x does not need to be on the same server as HP SIM, unless integration between Insight RS and HP SIM is desired.

For information about integrating Insight RS with HP SIM, see the *HP Insight Remote Support Installation and Configuration Guide* at <http://www.hp.com/go/insightremotesupport/docs>.

Q: What components of my HP Converged Systems will work with Insight RS?

A: For the following three Converged Systems, the following provides specific information about how Insight RS works in these Converged Systems environments, including what components are monitored or not monitored and any special installation instructions. :

1. HP CS300 for Microsoft Analytics Platform, previously called HP AppSystem for Microsoft SQL Server 2012 Parallel Data Warehouse

The HP CS300 for Microsoft Analytics Platform (APS) or HP AppSystem for Microsoft SQL Server 2012 Parallel Data Warehouse (AppSystem for PDW) is designed through a partnership between HP and Microsoft. It is a pre-integrated appliance with a specific configuration including ProLiant DL360p Gen8 servers.

Note: HP Enterprise Data Warehouse Optimized for Microsoft Parallel Data Warehouse is not enabled to support Insight RS, even at the component level. This solution was replaced by the HP AppSystem for Microsoft PDW in May 2013.

Currently Supported Monitored Devices

- ProLiant DL360p Gen8 including Windows Server 2012 on monitored devices and Hosting Device
- A5120-24G EI Ethernet Switch

Note: With Insight RS 7.0.8, data collection is now supported. Prior versions provide discovery, registration, and event monitoring.

The following components are not supported by Insight RS:

- JBODs (D6000)
 - Although the D6000 JBOD device is not recognized as an endpoint by Insight Remote Support 7.x, monitoring of events such as hard disk drive, fan or power supply failures reported by the Smart Array controller is supported.
- Mellanox FDR 36P InfiniBand Switches
 - InfiniBand switches are not supported.

Installing Insight RS on HP CS300 for Microsoft Analytics Platform (previously called HP AppSystem for PDW)

- As part of the initial HP CS300 for Microsoft Analytics Platform deployment, HP will install Insight RS at the time of the system deployment, if it has been included in the deployment planning.

Note: For deployment of Insight RS after the initial system deployment, HP recommends that HP TS implements Insight RS. Please contact your sales representative to initiate this activity. Insight RS 7.0.9 or later is recommended to be installed on the Windows Server 2008 R2 “Landing Zone” server of the appliance, or on a customer provided system.

2. HP SAP HANA Offerings

The following section covers the various SAP HANA HP programs including:

- ConvergedSystem CS500 for SAP HANA – Single node and Scale out – Introduced in March 2014
- AppSystem for SAP HANA – Including Single node and Scale Out (v1.1 and v1.2)

HP ConvergedSystem CS500 for SAP HANA

The HP CS500 for SAP HANA family includes:

- **Single Node** (also known as Scale Up)
 - The single node family includes a choice of four different configurations (256MB, 512MB, 1TB, 2TB).
 - All are DL580-based and the 1TB/2TB include D2700 disk enclosure.
 - Single Node Disaster Tolerant configurations with Serviceguard are based on CS500 single node offerings with additional hardware and Serviceguard software. These configurations have not been certified for Insight RS.
- **Scale Out** – A scale out configuration includes HP ProLiant DL580s, storage, and switches.

CS500 for SAP HANA Single Node (or Scale Up)

The major components of this family of solutions include:

- ProLiant DL580 Gen8
- D2700 Disk Enclosure (included only in 1TB and 2TB)
- SLES for SAP 11

The following has been tested with Insight RS, and the currently supported Monitored Devices include:

- ProLiant DL580 Gen8
 - SLES for SAP 11

The following components are not supported by Insight RS:

- D2700 Disk Enclosure with HDD
 - Although the D2700 JBOD device is not recognized as an endpoint by Insight Remote Support 7.x, monitoring of events such as hard disk drive, fan or power supply failures reported by the Smart Array controller is supported.

Installing Insight RS on CS500 for SAP HANA Single Node:

- A Hosting Device with a supported ProLiant Windows-based server will be required to host Insight RS.

CS500 for SAP HANA Scale Out

The major components of this family of solutions include:

- ProLiant DL580 Gen8
- ProLiant DL380p Gen8
- 5900 AF Switch
- SN600B FC SAN Switch (M6710 SAS Drive Enclosure)
- 3PAR StoreServ 7400
- SLES for SAP 11

The following has been tested with Insight RS, and the currently supported Monitored Devices include:

- ProLiant DL580 Gen8
 - SLES for SAP 11
- ProLiant DL380p Gen8
- 5900 AF Switch
- SN600B FC SAN Switch

The following components are not supported by Insight RS:

- 3PAR products have separate support automation (STATS)
 - 3PAR StoreServ File Controller
 - 3PAR 7400 StoreServ Storage

Installing Insight RS on CS500 for SAP HANA Scale Out:

- A Hosting Device with a supported ProLiant Windows-based server is included as part of the CS500 for SAP HANA Scale Out configuration to host Insight RS.

The HP AppSystems for SAP HANA consists of a family of solutions as outlined below:

- Scale Out - includes HP ProLiant BladeSystem BL680c servers and the HP StoreAll 9300 Gateway Storage with HP Enterprise Virtual Array (EVA) P6550.
- Single Node – The single node family includes a choice of seven different configurations, with the large configuration
 - DL580-based Single Node: XS, S, M
 - DL980-based Single Nodes: M+, Lg
 - Virtual HANA – DL980 Large Single Node with Virtualization option
 - Business Suite on HANA – 2TB and 4TB – DL980 based solution

Following are four AppSystem for SAP HANA configurations that have been tested with Insight RS:

HANA Scale Out 1.2

Currently Supported Monitored Devices:

- BladeSystem c7000 Enclosure
- ProLiant BL460c G7
 - SLES for SAP 11
- ProLiant DL380p Gen8
- HP 8/24 16-Port FC Switch
- HP 5900AF Switch
 - Note:** The HP 5900AF Switch is supported without stacking in Insight RS 7.0.8 Content Level Update 1.
- Virtual Connect is not covered directly by Insight RS, but event monitoring is done via the onboard administrator:
 - HP Virtual Connect Flex-10/10D Module
 - HP Virtual Connect FlexFabric 10Gb/24-port Module

Components not supported by Insight RS:

- 3PAR products have separate support automation (STATS)
 - 3PAR StoreServ File Controller
 - 3PAR 7400 StoreServ Storage

Installing Insight RS on HP AppSystem for SAP HANA 1.2:

Note: A Hosting Device with a supported ProLiant Windows-based server is included as part of the HANA 1.2 appliance to host Insight RS.

HANA Scale Out 1.1

Currently Supported Monitored Devices:

- BladeSystem c7000 Enclosure
- ProLiant BL680c G7 servers
 - SUSE Linux Enterprise Server for SAP Applications is based on the latest proven version of SUSE Linux Enterprise Server 11 Service Pack 2 and inherits all software and hardware certifications.
 - SNMP-based management only
- HP StoreAll 9300 Gateway Storage with HP Enterprise Virtual Array (EVA) P6550
- ProCurve 6120XG Switch
- ProCurve E5406zl Switch
- X3400 G2 Network Storage System
- HP 8/8 SAN Switch

Components not supported by Insight RS:

- ProLiant Specials - ProLiant SE1220
- JBODs are not recognized as endpoints by Insight Remote Support 7.x, but monitoring of events such as hard disk drive, fan or power supply failures reported by the Smart Array controller is supported.
- HP VC Flexfabric 10Gb/24
- Fusion IO accelerators

Installing Insight RS on HP AppSystem for SAP HANA:

Note: A separately ordered Hosting Device on a supported ProLiant Windows-based server will be required to host Insight RS.

Business Suite on HANA – 2TB and 4TB

Currently Supported Monitored Devices:

- ProLiant DL980 G7
 - SUSE Linux Enterprise Server for SAP Applications is based on the latest proven version of SUSE Linux Enterprise Server 11 Service Pack 2 and inherits all software and hardware certifications.
 - SNMP-based management only

Components not supported by Insight RS:

- D2700 Disk Enclosure
 - Although the D2700 JBOD device is not recognized as an endpoint by Insight Remote Support 7.x, monitoring of events such as hard disk drive, fan or power supply failures reported by the Smart Array controller is supported.
- PCIe IO Accelerator (673648-B21: HP 2410GB Multi Level Cell G2 PCIe ioDrive2 Duo)

Installing Insight RS on HP AppSystem for SAP HANA:

Note: A separately ordered Hosting Device on a supported ProLiant Windows-based server will be required to host Insight RS.

Virtual HANA (Single Node Large with Virtualization)

Currently Supported Monitored Devices:

- ProLiant DL980 G7
 - VMware ESXi 5.1
 - WBEM-based management only

Components not supported by Insight RS:

- D2700 Disk Enclosure
 - Although the D2700 JBOD device is not recognized as an endpoint by Insight Remote Support 7.x, monitoring of events such as hard disk drive, fan or power supply failures reported by the Smart Array controller is supported.
- Fusion IO Accelerator (600281-B21 HP 320GB SLC PCIe IO Accelerator)

Installing Insight RS on HP AppSystem for SAP HANA

Note: A separately ordered Hosting Device on a supported ProLiant Windows-based server will be required to host Insight RS.

Note: Please refer to the *Insight Remote Support 7.0.8 Release Notes* at <http://www.hp.com/go/insightremotesupport/docs> for new vMotion support and vCenter restrictions when used on a Hosting Device.

3. HP CloudSystem Matrix 7.x

HP CloudSystem Matrix, formerly called BladeSystem Matrix, is a packaged data center infrastructure with server blade, storage, and network connectivity and resources that can be monitored as individual components from an external Insight RS Hosting Device. However, HP recommends installing the Hosting Device on the CMS node integrated within the Matrix Operating Environment where available. For details, please see the CloudSystem Matrix Compatibility Chart available at <http://www.hp.com/go/matrixcompatibility>.

There are two scenarios related to Support Automation and CloudSystem Matrix 7.2 and 7.3 support:

Scenario 1: Insight Remote Support installed and configured in the CloudSystem Matrix CMS

Configuration Recommended by HP (as certified by Insight RS 7.1 with CloudSystem Matrix 7.2 and 7.3):

- Insight Remote Support Advanced 5.8 upgrade to Insight RS 7.1 Hosting Device running Windows Server 2008 R2 on Matrix CMS
- Cold install of Insight RS 7.1 Hosting Device running Windows Server 2012 on Matrix CMS

Scenario 2: Insight Remote Support installed and configured on a separate server to the CloudSystem Matrix

As part of the design of Insight RS, Insight RS can be installed on a separate server to monitor an environment of devices. The supported configuration is described in the *Insight Remote Support 7.x Release Notes*.

4. HP CloudSystem 8.0

HP CloudSystem 8.0 requires the use of embedded remote support through iLO 4 and AMS to be supported by Insight Remote Support.

The CS 8.0 solution includes:

- ProLiant DL360p Gen8
- BladeSystem c7000
- Any of the following blade servers:
 - BL420c Gen8
 - BL460c Gen8
 - BL465c Gen8
- VirtualConnect FlexFabric 10Gb/24-Port Switch
- HP 5920AF Ethernet Switch
- Optional components:
 - 3PAR StorServ 7200

5. HP Converged Systems for Virtualization

The HP Converged Systems for Virtualization consists of a family of solutions as outlined below:

- CS300 for Virtualization – includes:
 - ProLiant DL380p Gen8 rack servers
 - 2900 series network switches
 - Insight Control VMware ESXi 5.1 with vCenter and vSphere
 - HP StoreVirtual VSA
- CS700 for Virtualization – includes:
 - ProLiant BL460c Gen8 blade servers
 - ProLiant DL360 Gen8 rack server
 - 3PAR storage 7200 series
 - 5900 series network switches
 - Insight Control VMware ESXi 5.1 with vCenter and vSphere
 - Virtual Connect Enterprise Manager

Insight RS configuration requires special steps for CS for Virtualization to be performed by HP. The configuration of Insight RS is part of the initial deployment of CS for Virtualization. If you need assistance with Insight RS, please contact HP support.

The following configuration has been tested with Insight RS:

CS300 for Virtualization

Currently Supported Monitored Devices:

- ProLiant DL380p Gen8
 - Insight RS 7.0.8 Content Level Update 1 or newer is required to support the DL380p Gen8 server.
 - Insight RS v7.0.8 Content Level Update 1 or newer must be configured for embedded Remote Support event monitoring of DL380p Gen8 via the iLO 4 management processor.
- Configured for embedded Remote Support only (iLO 4) in Insight RS

Components not supported by Insight RS:

- HP 2920AF-48G Switch (due to “stacked” configuration)
- HP 5900AF-48G Switch (due to “stacked” configuration)
- StoreVirtual VSA Storage

Installing Insight RS on HP CS300 for Virtualization:

Note: A Hosting Device with a supported ProLiant Windows-based server is required to host Insight RS. Insight RS 7.0.8 CLU1 or newer is required.

The following configuration will complete testing soon. This FAQ will be updated once testing has been completed. In the meantime HP expects the following behavior; please contact HP Support if this is not the case.

CS700 for Virtualization

Expect following devices to be monitored:

- BladeSystem c7000
- ProLiant BL470c Gen8
 - Configured for embedded RS only (iLO 4)
- ProLiant DL360p Gen8
- HP 5920AF Switch

Note: The HP 5920AF Switch is supported without stacking in Insight RS 7.0.8 Content Level Update 1.

Expect following components not supported by Insight RS:

- 3PAR products have separate support automation (STATS)
 - 3PAR StoreServ File Controller
 - 3PAR 7200 StoreServ Storage

6. HP Converged System 300 for Vertica

The major components of CS300 for Vertica include:

- ProLiant DL380 Gen8
- DL360p Gen8
- HP 5900AFSwitch
- Red Hat Enterprise Linux

The following has been tested with Insight RS, and the currently supported Monitored Devices include:

- ProLiant DL380p
 - Red Hat Enterprise Linux 6.4
- ProLiant DL360p
 - Red Hat Enterprise Linux 6.4
 - Microsoft Windows 2012
- iLO 4
- HP 5900AF switch IRF configuration

The following components are not supported by Insight RS

- The Intelligent PDU: PDUs are not supported.

Installing Insight RS on CS300 for Vertica:

A Hosting Device with a supported ProLiant Windows-based server will be required to host Insight RS.

7. HP E5000 Messaging Systems

The HP E5000 Messaging Systems consists of the solutions outlined below:

HP E5000 G1

Currently Supported Monitored Devices:

- E5000 System Enclosure
- HP E5460sb G2 blades

HP E5000 G2

Currently Supported Monitored Devices:

- E5000 System Enclosure
- HP E5460sb blades