

Sheet: /STM32G0/
File: stm32g0.kicad_sch


Title:

Size: A4 Date: 2024-01-02

KiCad E.D.A. kicad 7.0.1

Rev: 1

Id: 3/5

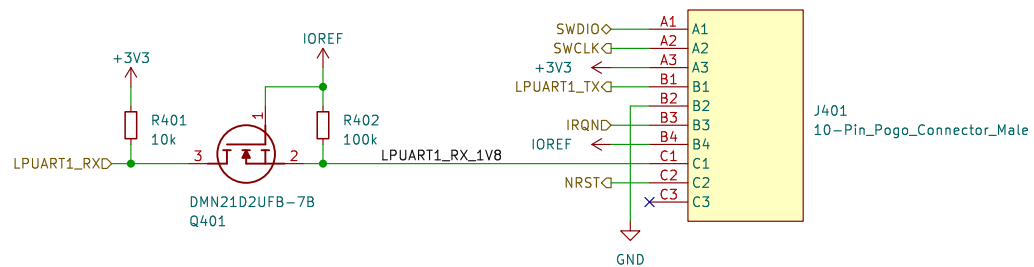

RX must be shifted from IOREF (1V8) to 3V3.
TX connects to a 3V tolerant pin so is not an issue.

Sheet: /Pogo Connector/
File: pogo_connector.kicad_sch


Title:

Size: A4 Date: 2024-01-02

KiCad E.D.A. kicad 7.0.1

Rev: 1

Id: 4/5

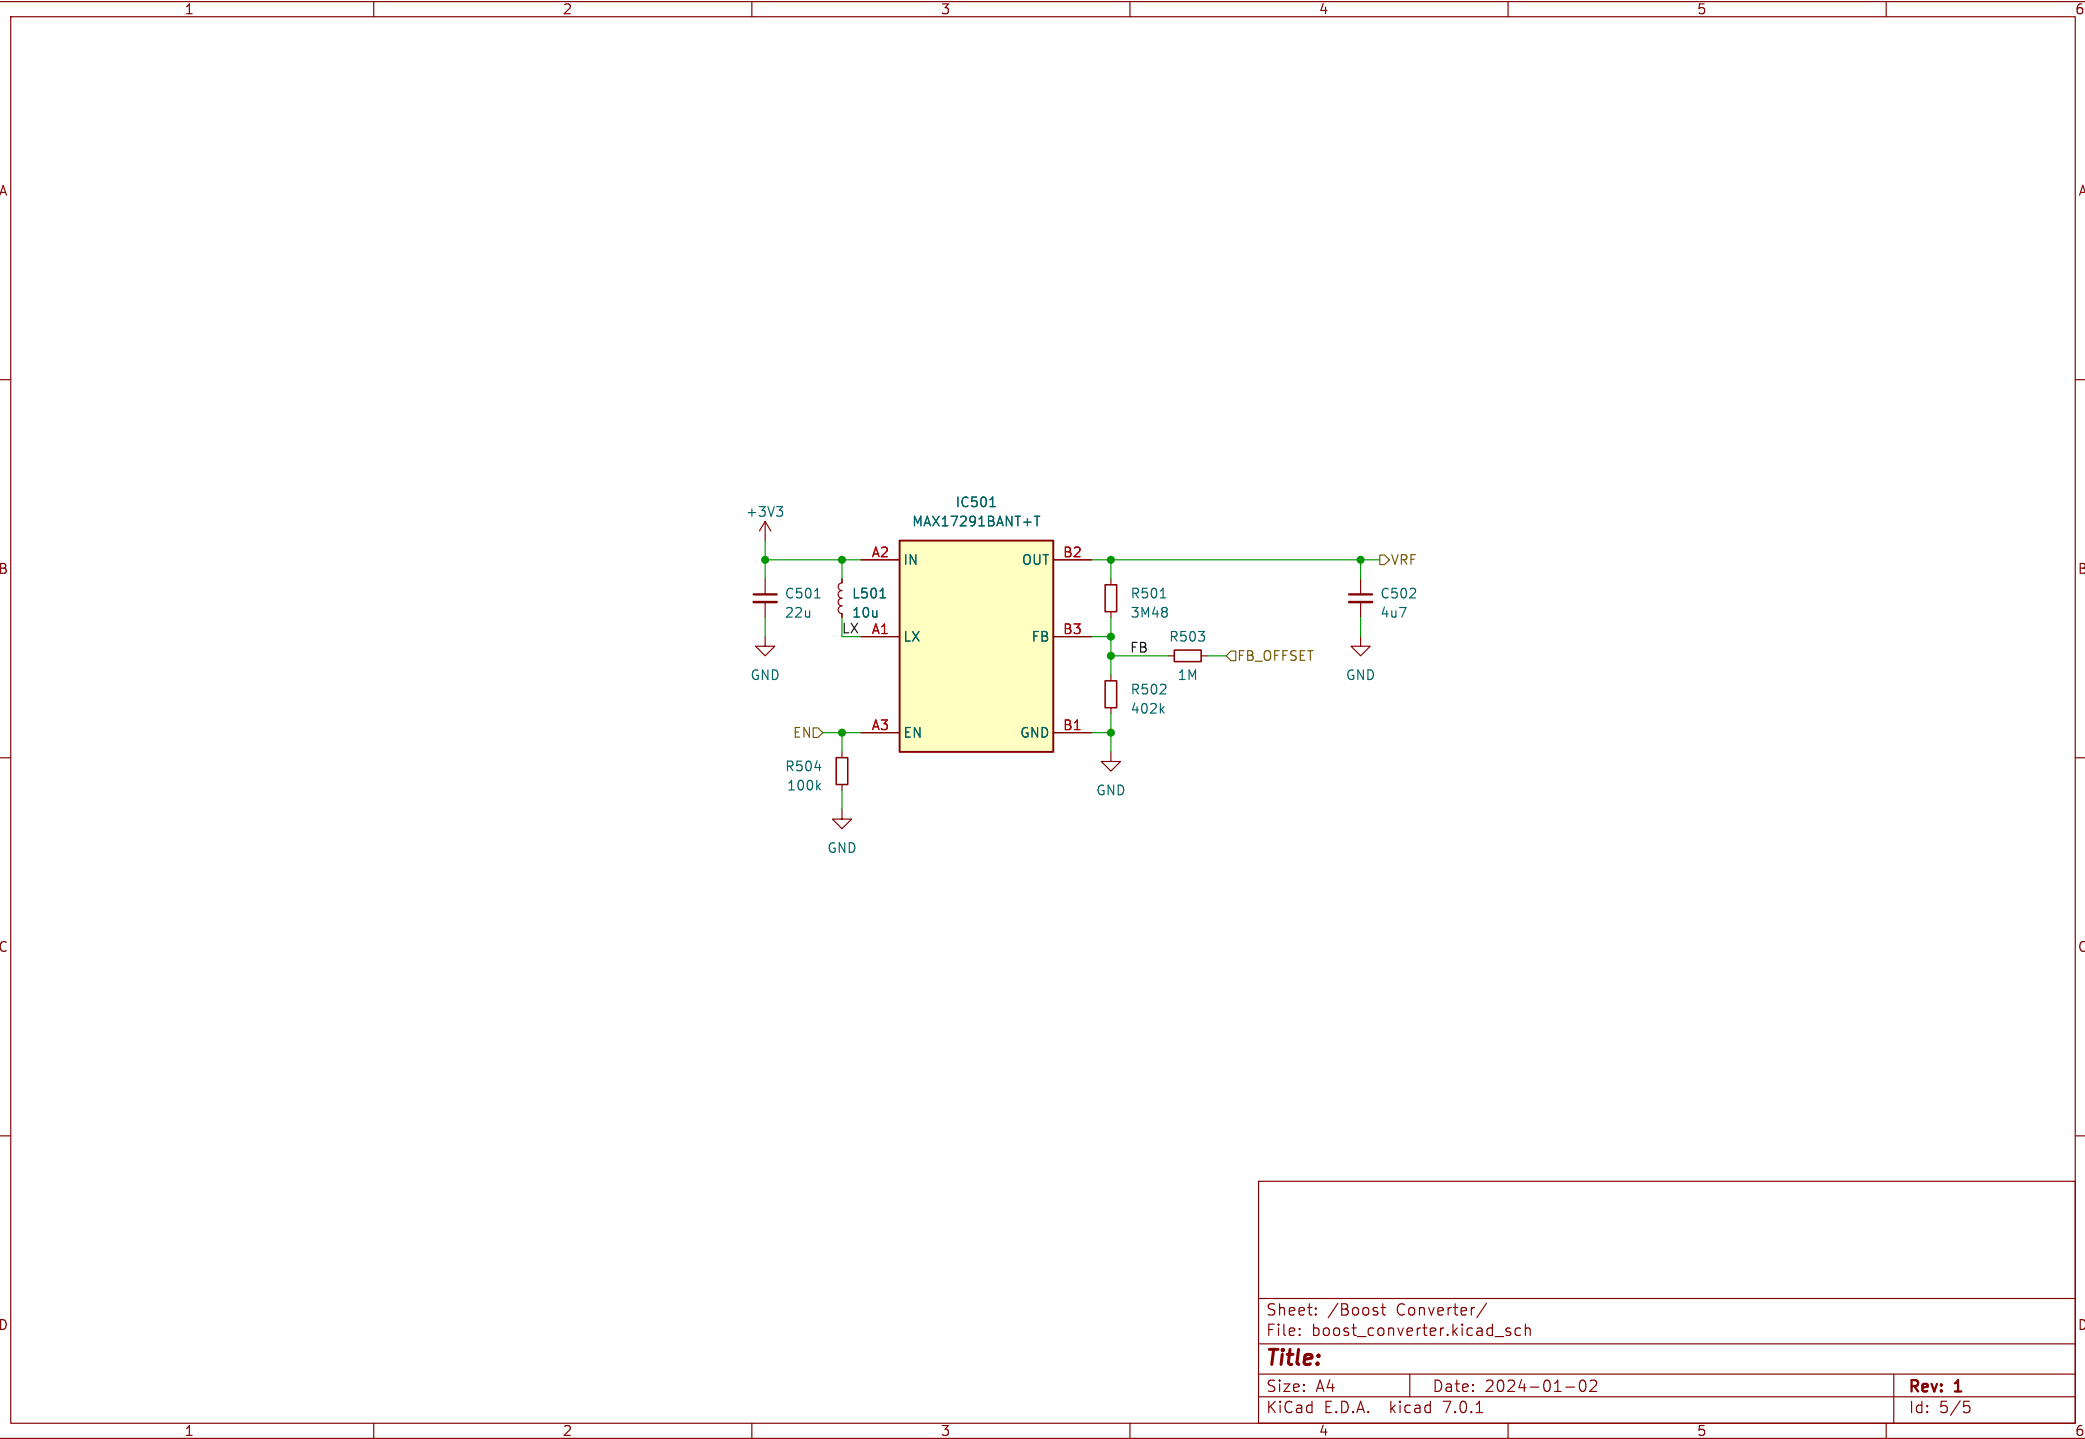

Sheet: /Boost Converter/
File: boost_converter.kicad_sch

Title:

Size: A4 Date: 2024-01-02

KiCad E.D.A. kicad 7.0.1

Rev: 1

Id: 5/5