


n = 6 eight phase-consistent initial states — one stable period-8 attractor

(A) The eight phase-consistent initial states 000–111 — each is a pure rotation of the same strictly mod-8 sequence (8/8 certified, 56 reads each, commitment 1.0 for every bit)

000	1	2	3	4	5	6	7	0	1	2	3	4	5	6	7	0	1	2	3	4	5	6	7	0	1	2	3	4	5	6	7	0	1	2	3	4	56 reads	starts at 1
001	2	3	4	5	6	7	0	1	2	3	4	5	6	7	0	1	2	3	4	5	6	7	0	1	2	3	4	5	6	7	0	1	2	3	4	5	56 reads	starts at 2
010	3	4	5	6	7	0	1	2	3	4	5	6	7	0	1	2	3	4	5	6	7	0	1	2	3	4	5	6	7	0	1	2	3	4	5	6	56 reads	starts at 3
011	4	5	6	7	0	1	2	3	4	5	6	7	0	1	2	3	4	5	6	7	0	1	2	3	4	5	6	7	0	1	2	3	4	5	6	7	56 reads	starts at 4
100	5	6	7	0	1	2	3	4	5	6	7	0	1	2	3	4	5	6	7	0	1	2	3	4	5	6	7	0	1	2	3	4	5	6	7	0	56 reads	starts at 5
101	6	7	0	1	2	3	4	5	6	7	0	1	2	3	4	5	6	7	0	1	2	3	4	5	6	7	0	1	2	3	4	5	6	7	0	1	56 reads	starts at 6
110	7	0	1	2	3	4	5	6	7	0	1	2	3	4	5	6	7	0	1	2	3	4	5	6	7	0	1	2	3	4	5	6	7	0	1	2	56 reads	starts at 7
111	0	1	2	3	4	5	6	7	0	1	2	3	4	5	6	7	0	1	2	3	4	5	6	7	0	1	2	3	4	5	6	7	0	1	2	3	56 reads	starts at 0

(B) The retired metric spans 3.5×10^4 for one and the same circuit; the paired metric spans 0.196 %

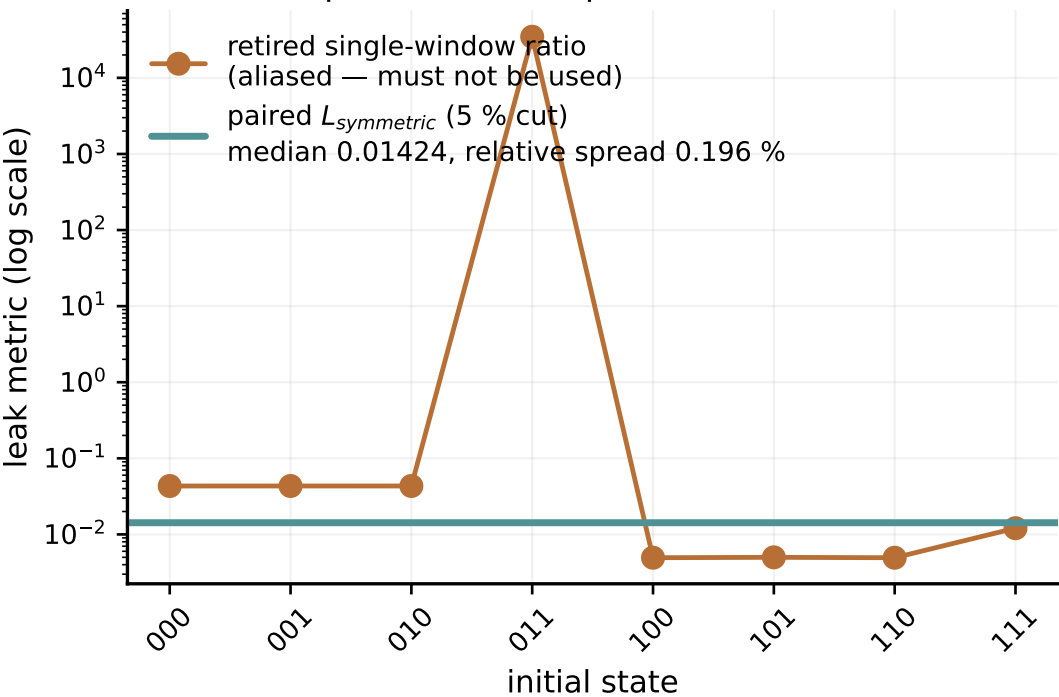

(C) Per-bit read margin in every initial state (commitment = 1.0 for all bits in all eight)

