


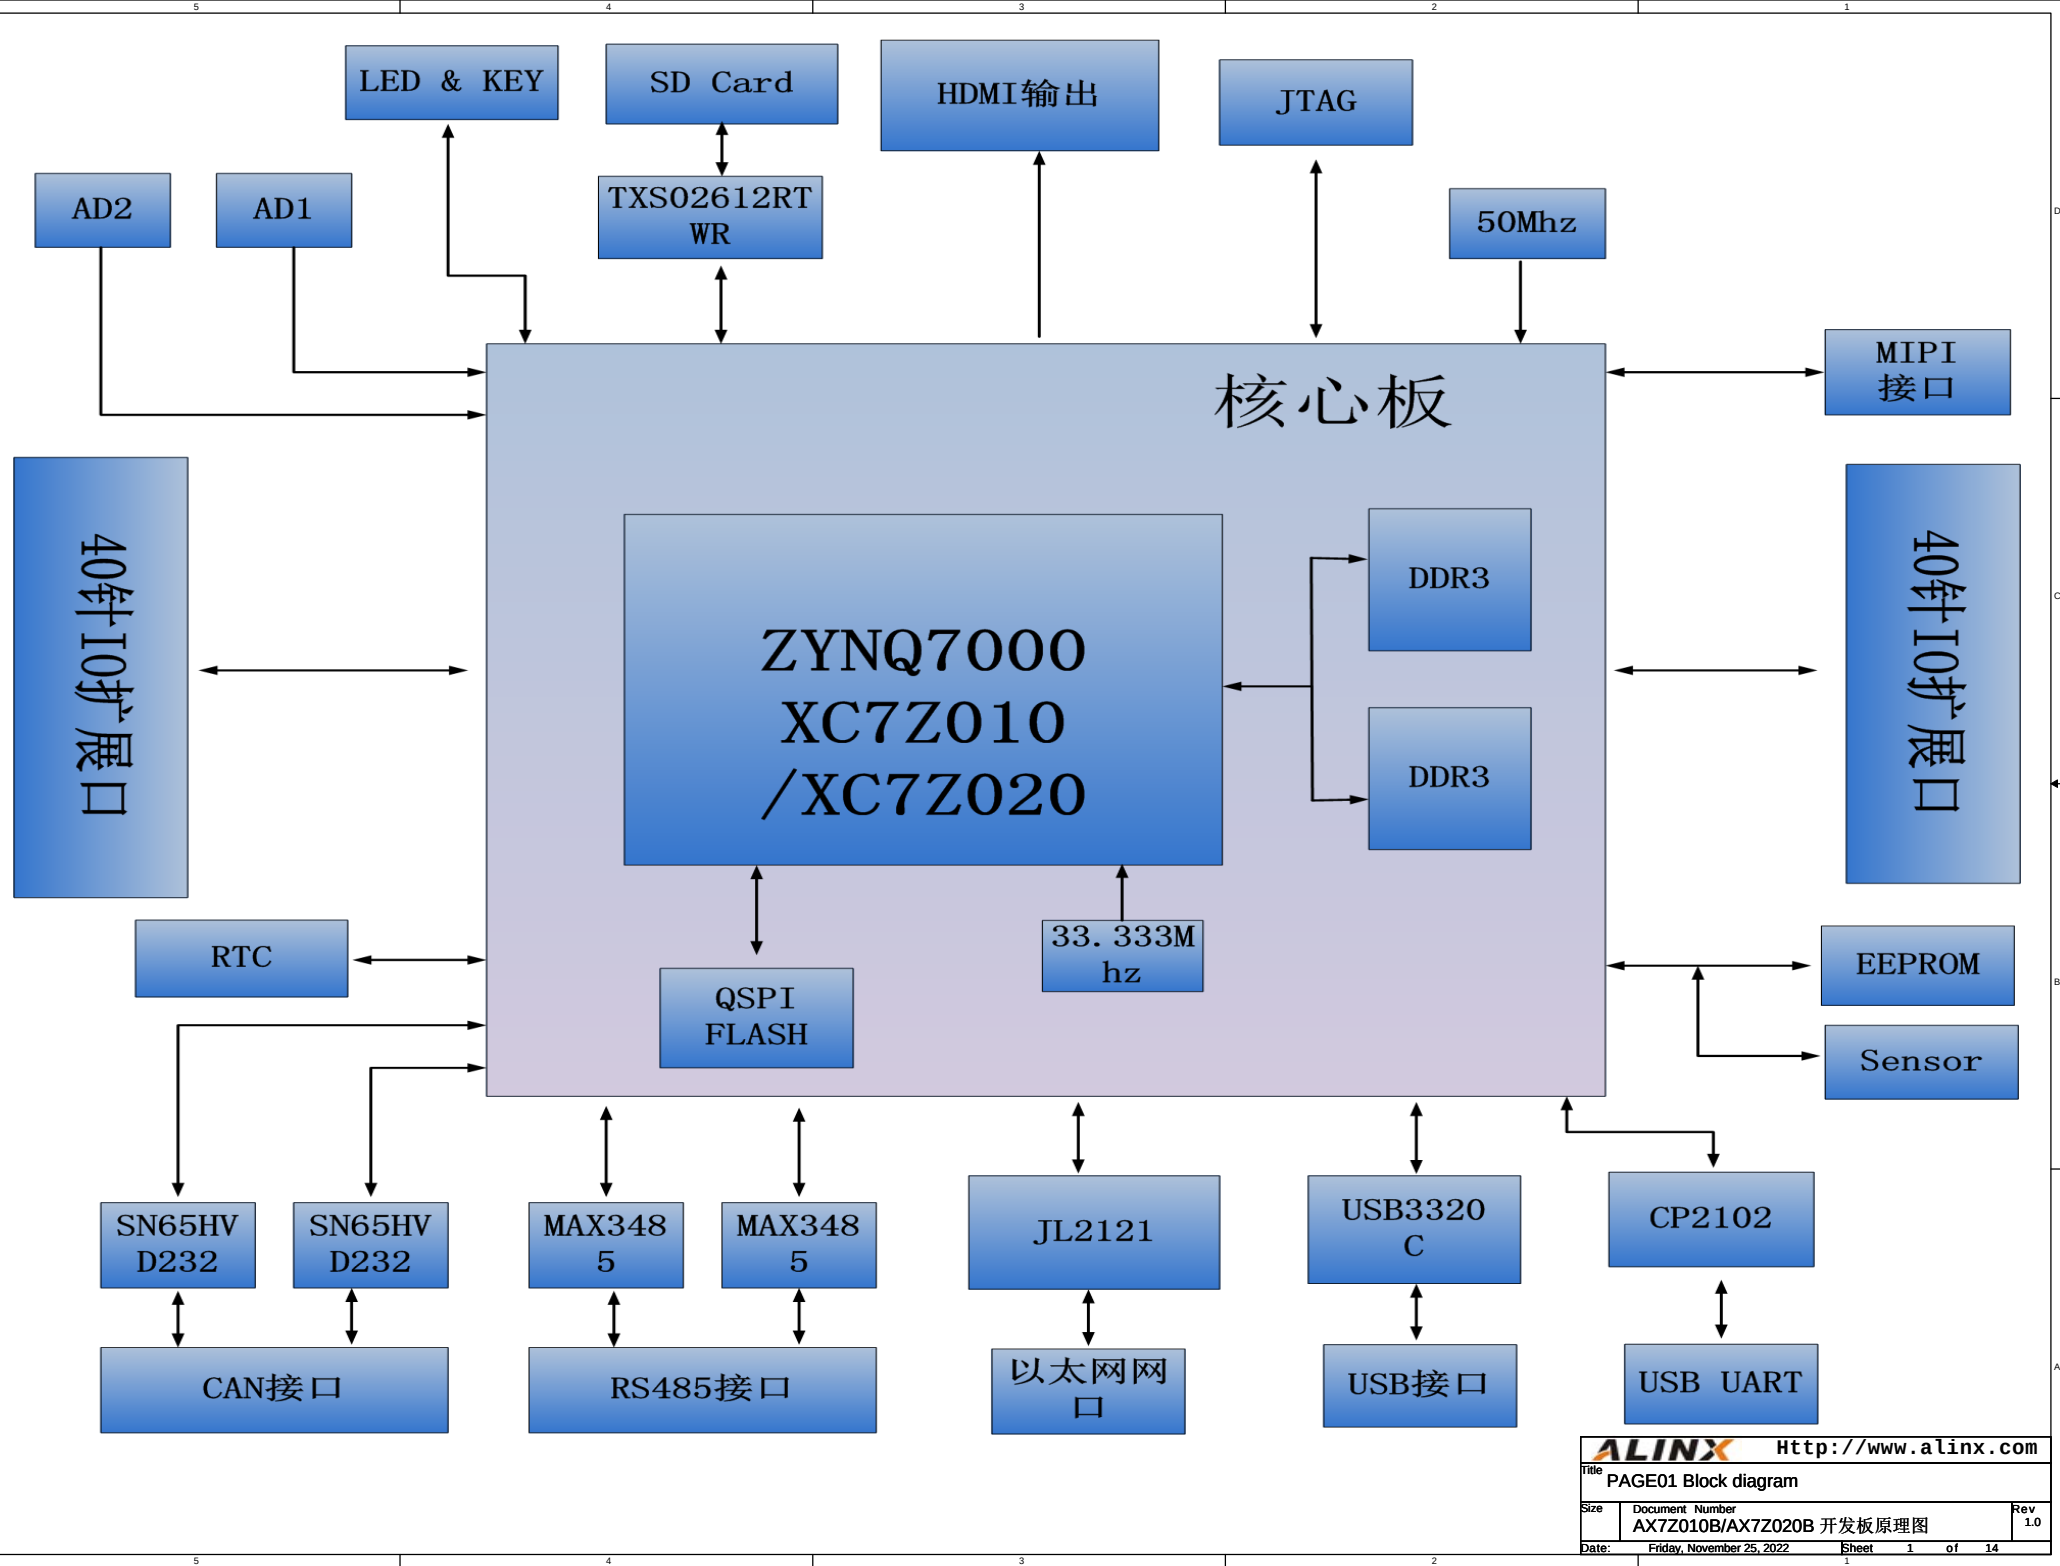


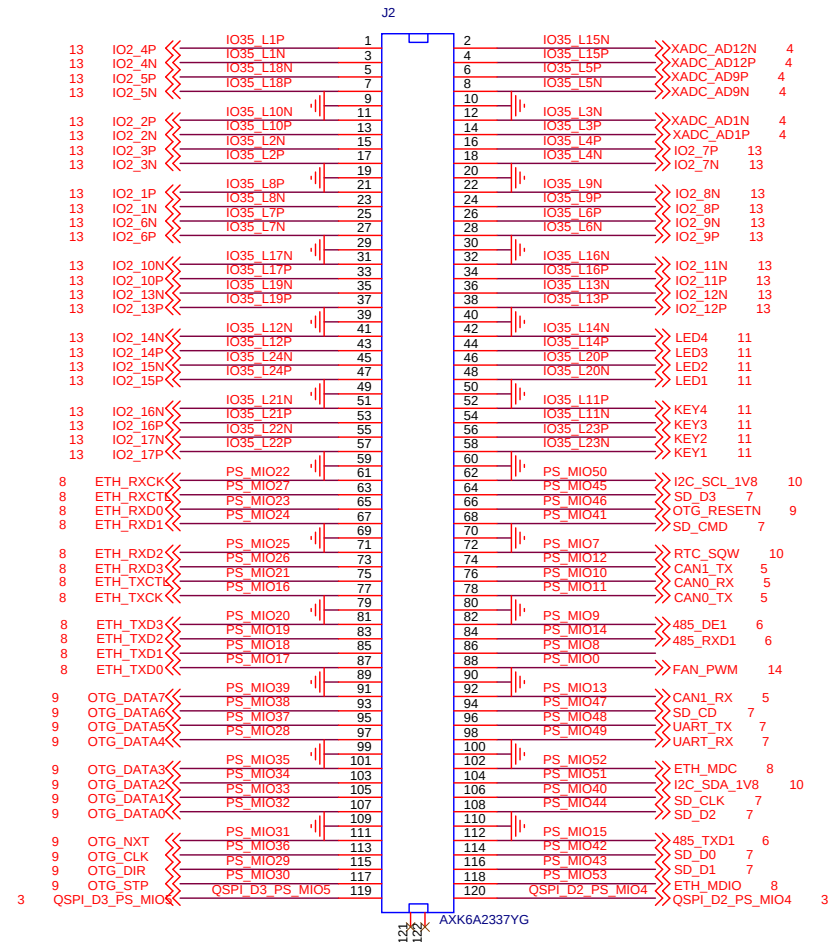

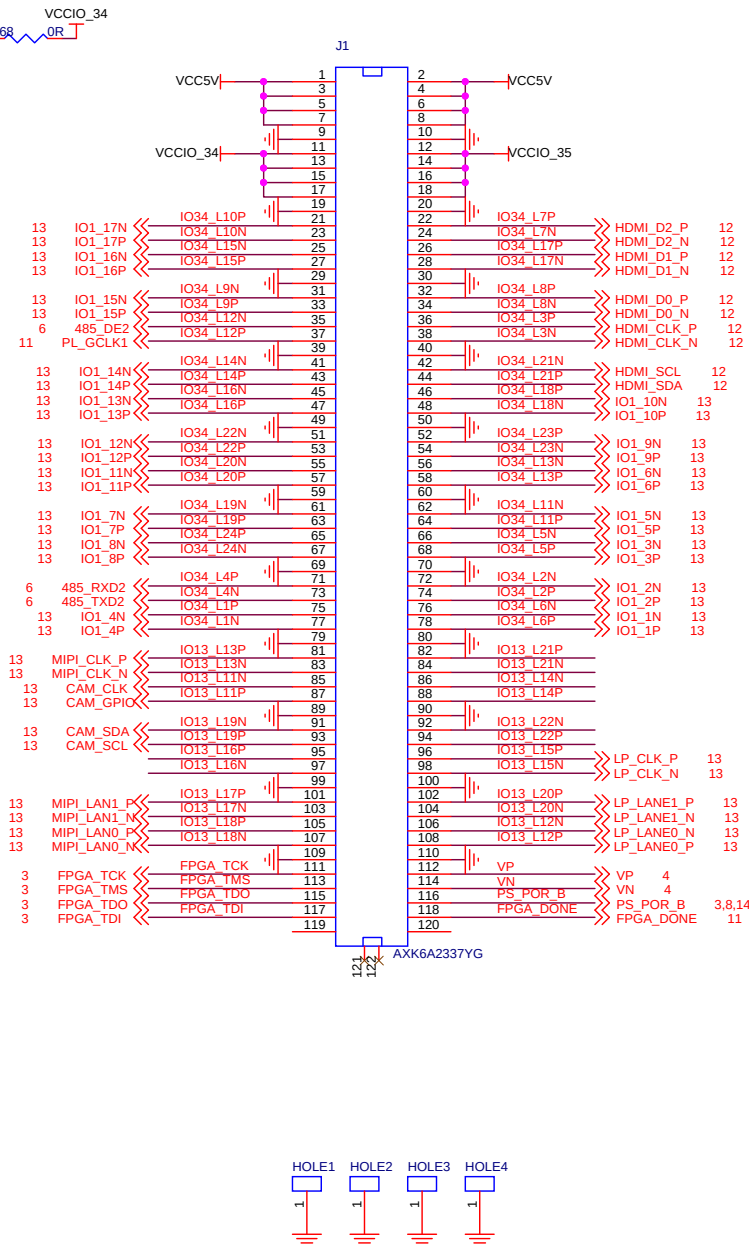


BOOT OPTION

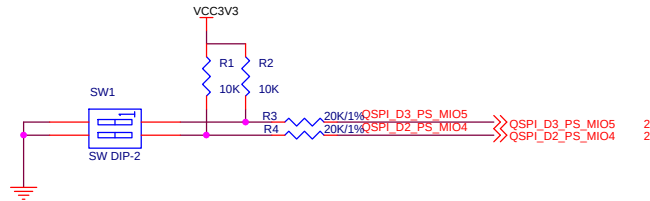


Boot Mode	MIO[5] (QSPI_D3)	MIO[4] (QSPI_D2)
JTAG	0	0
NAND	0	1
QSPI-FLASH	1	0
SD Card	1	1


JTAG Connector


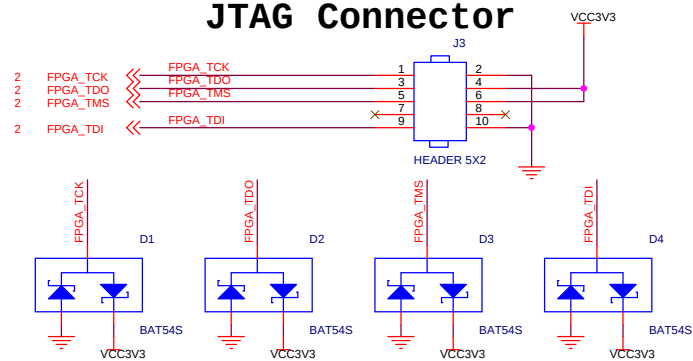




POWER ON RESET

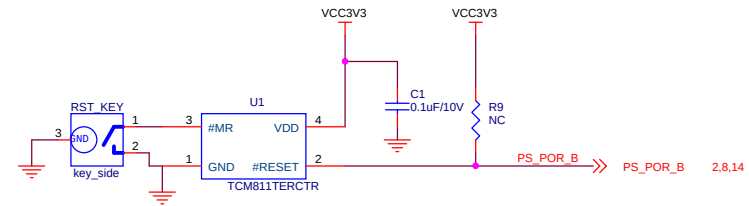


Anti-Aliasing Filter

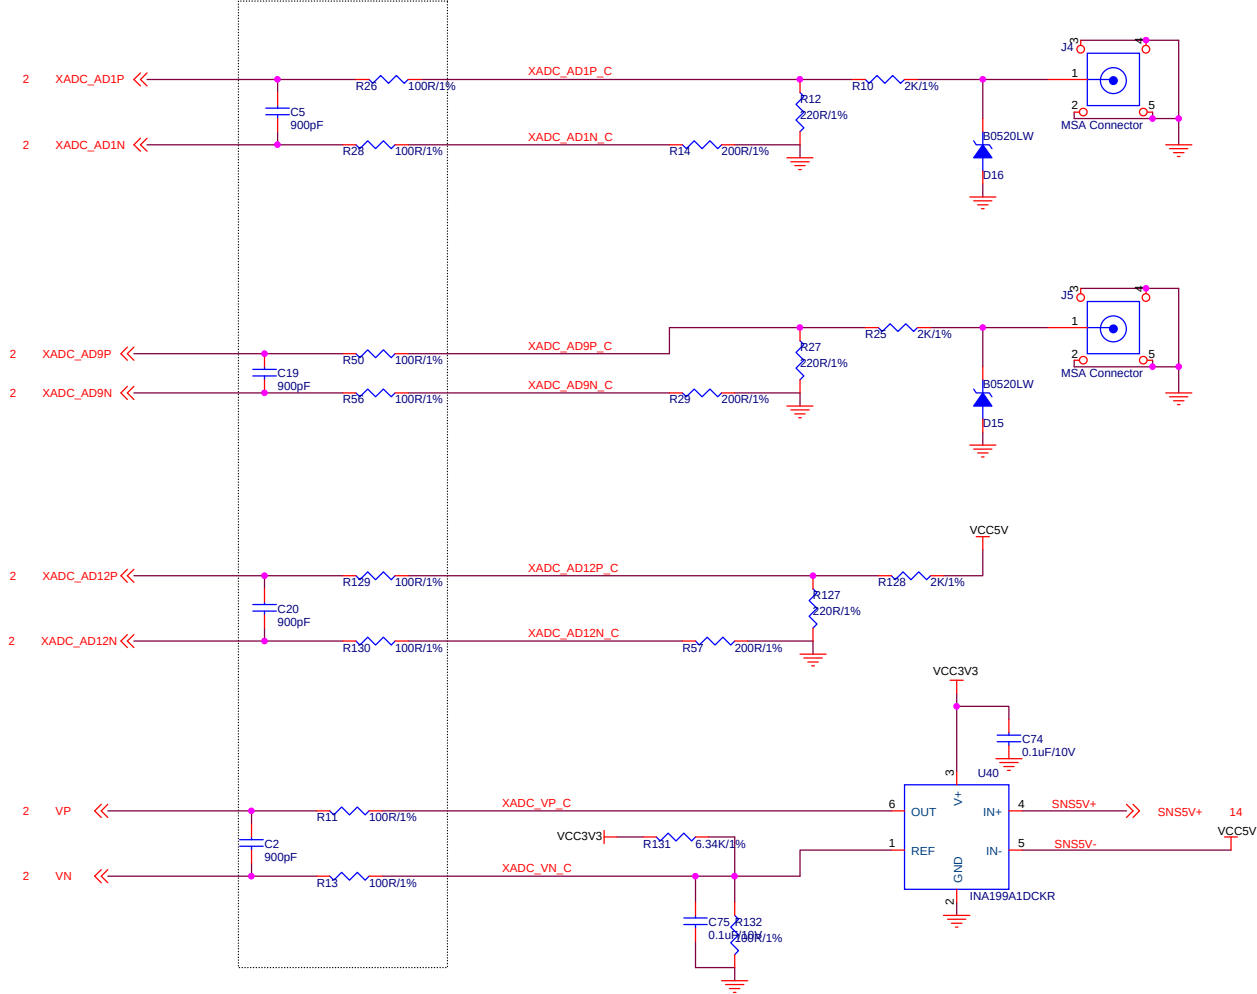

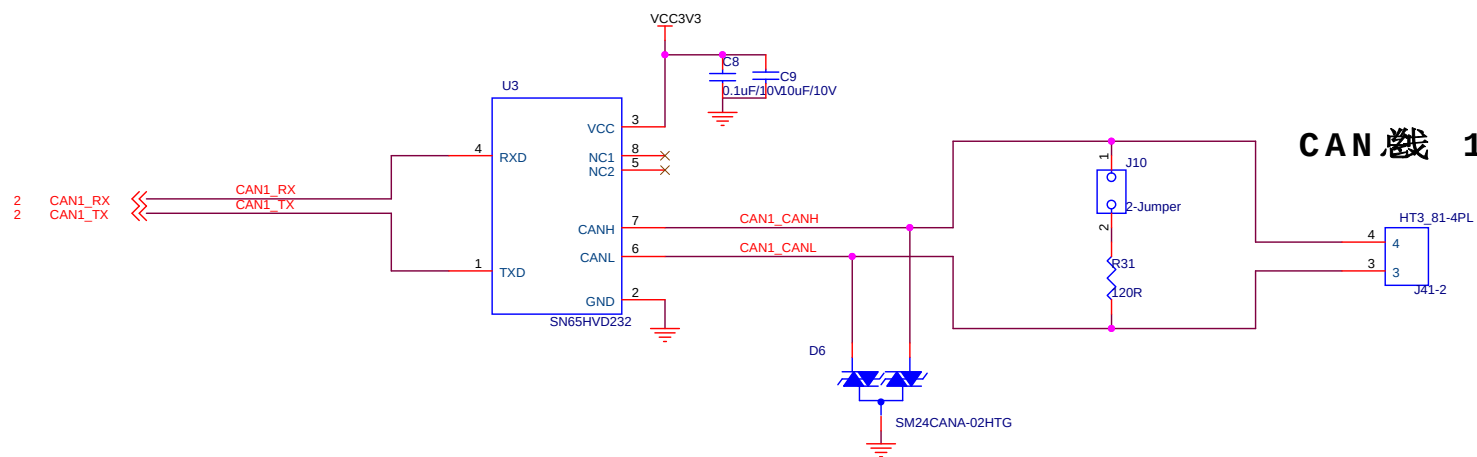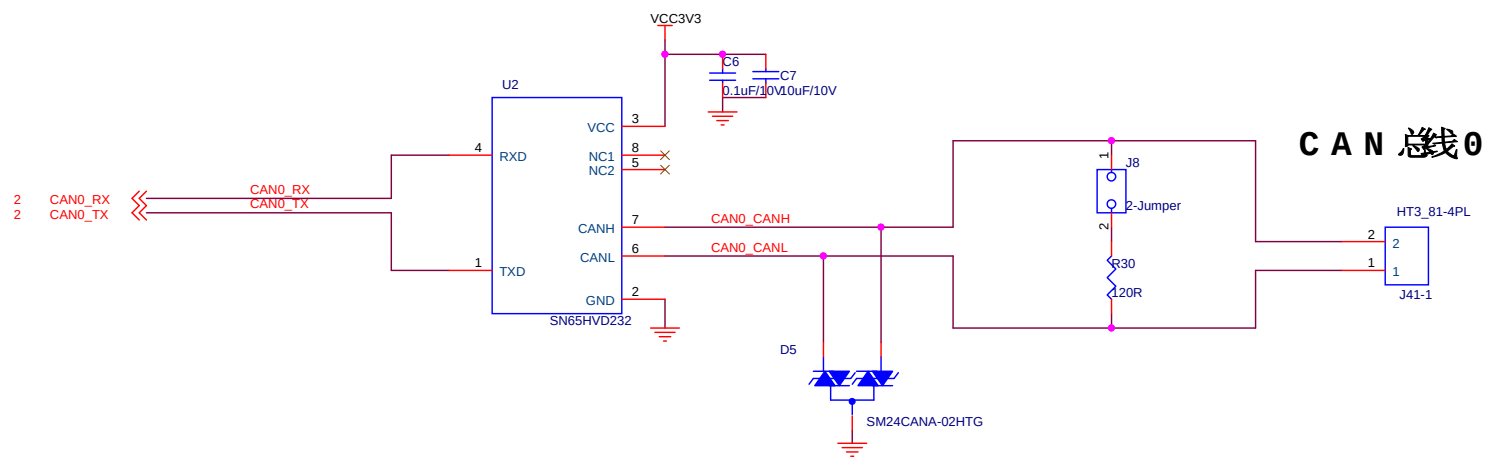


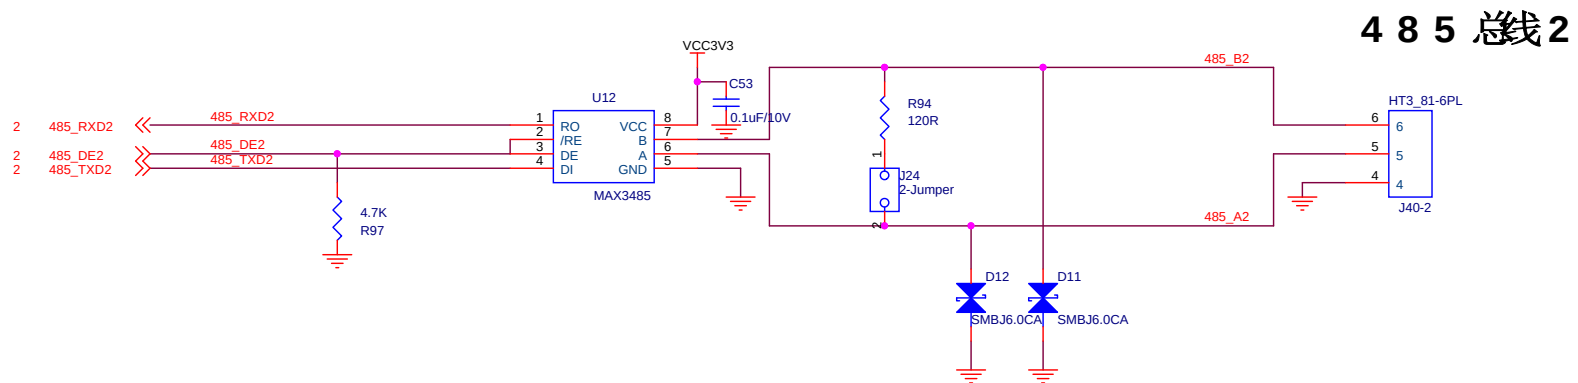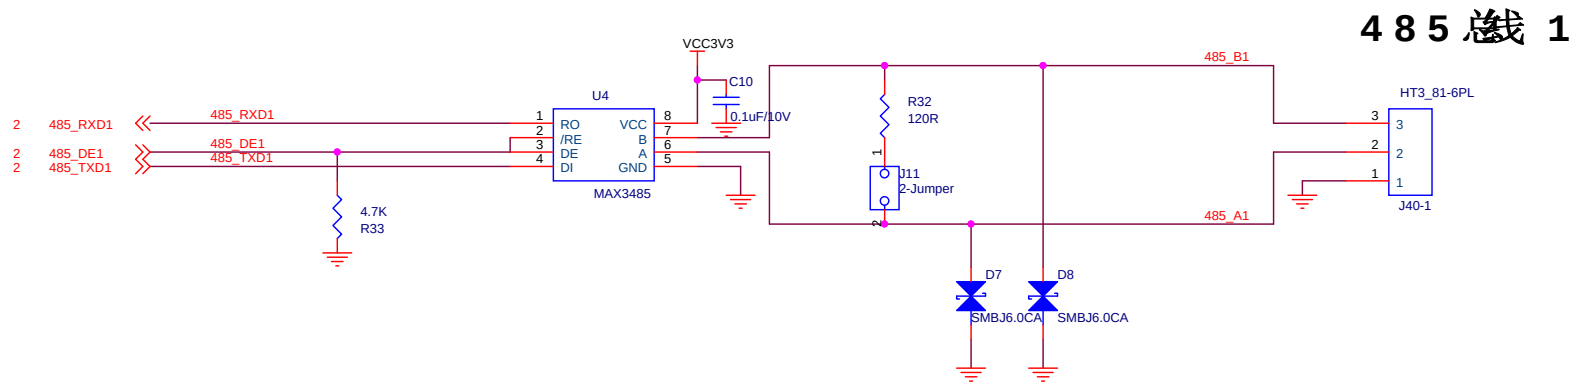


USB Uart


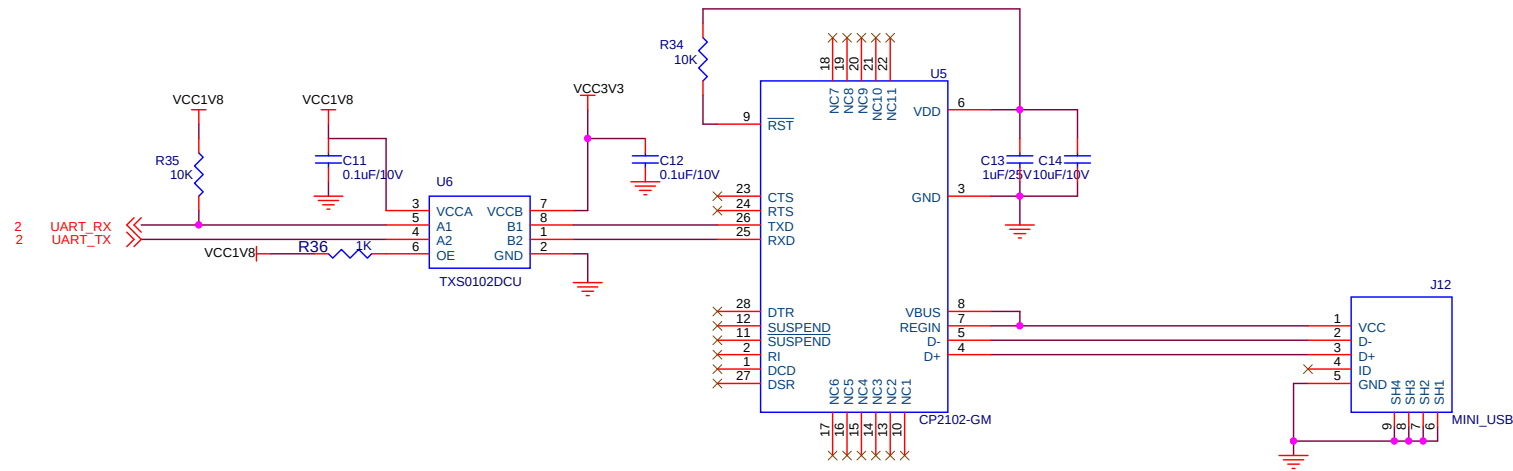




SD Card Connector

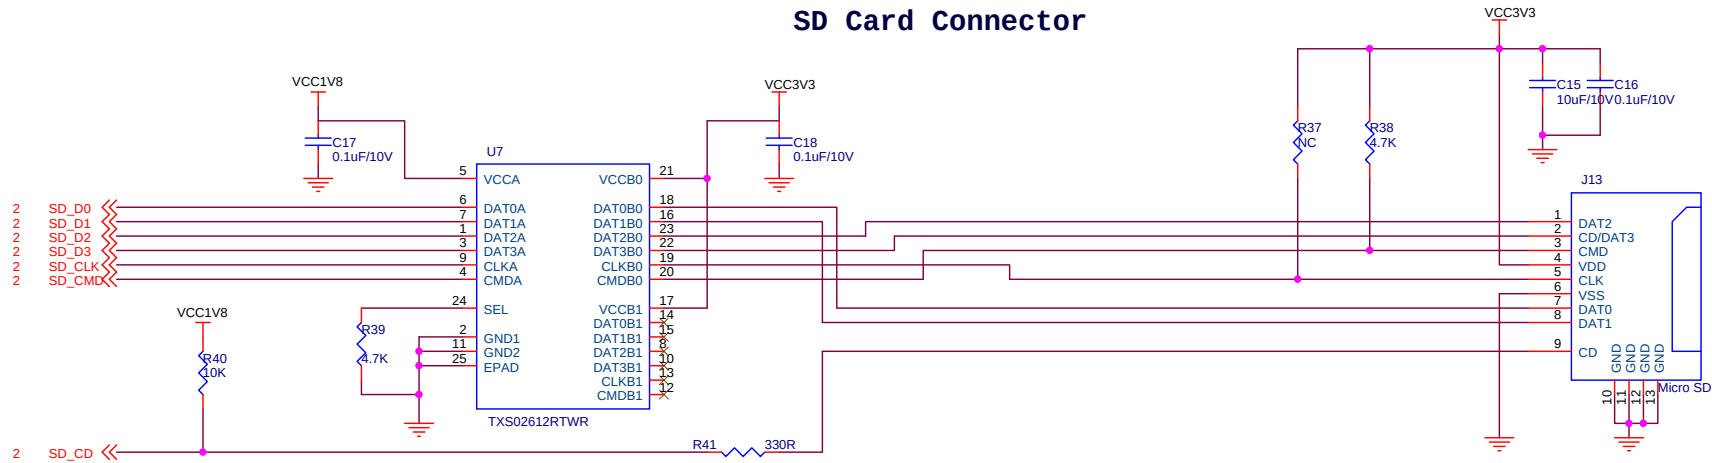


ALINX Confidential

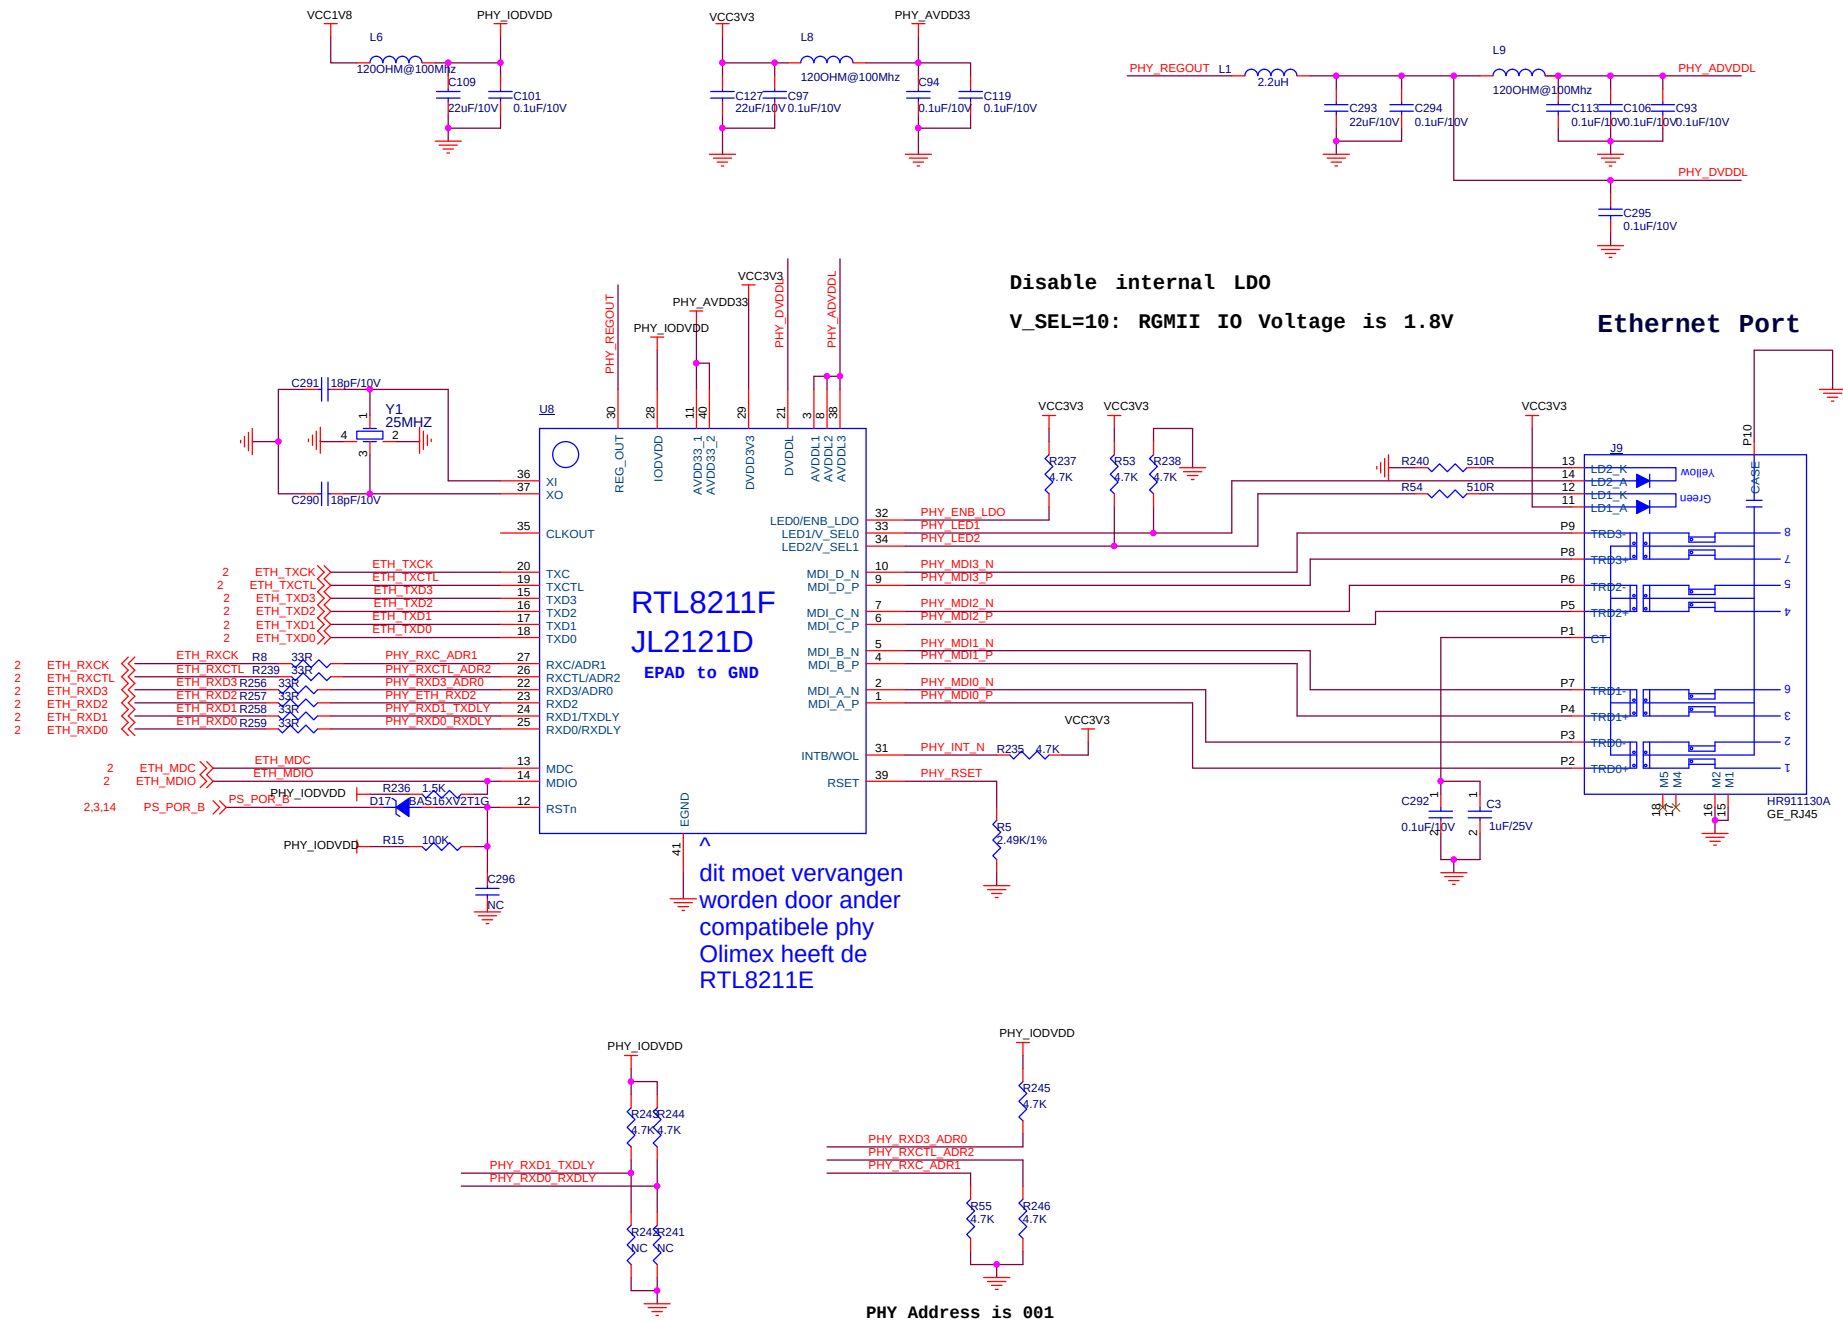

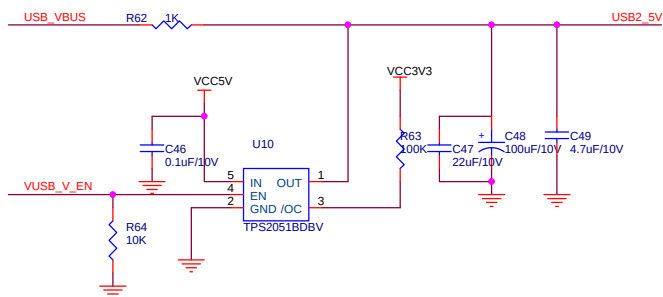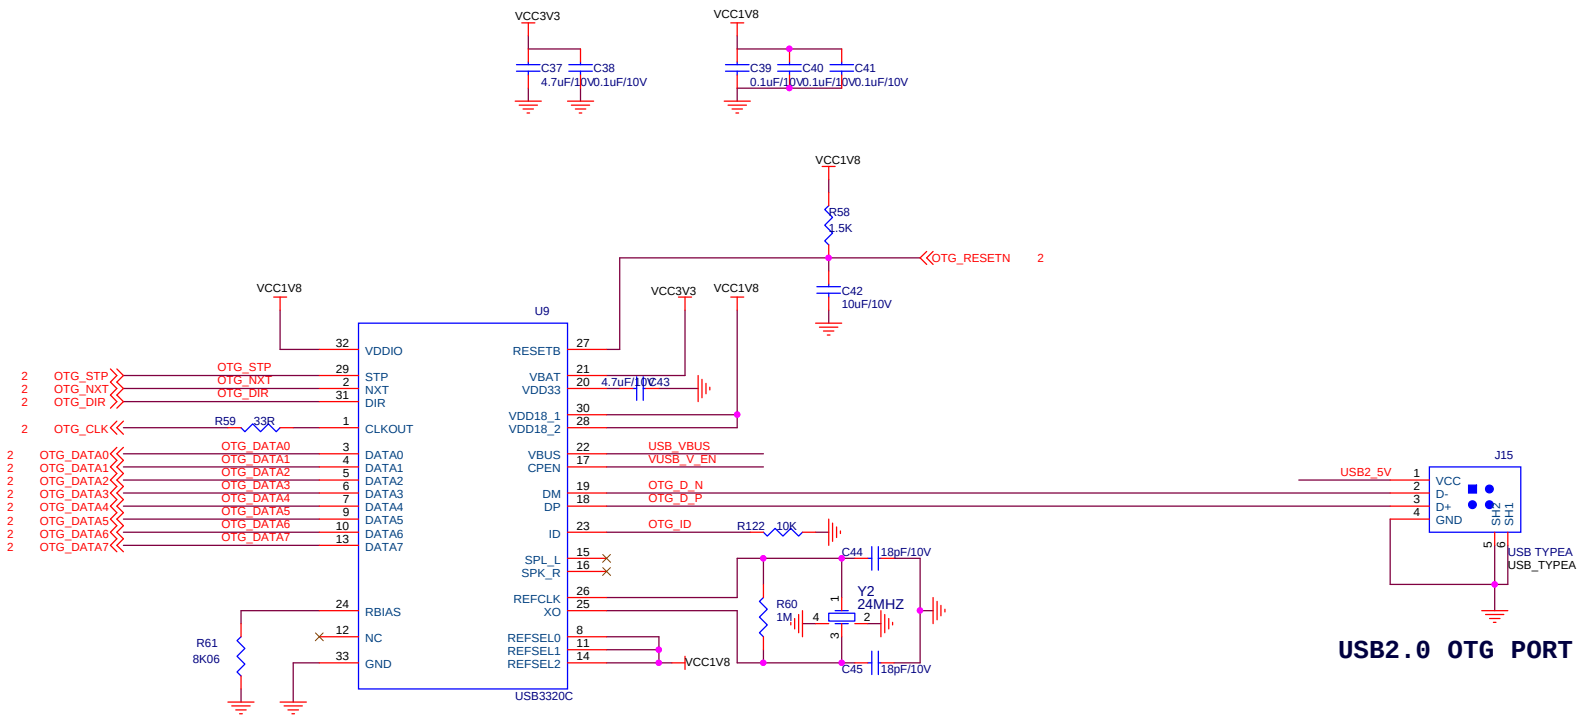


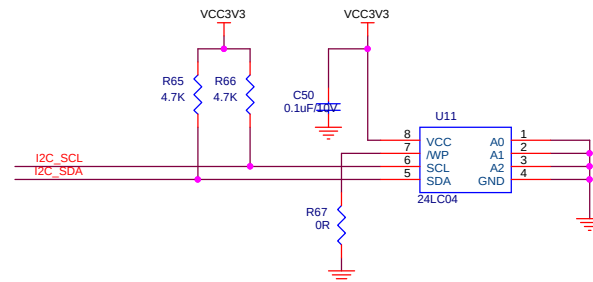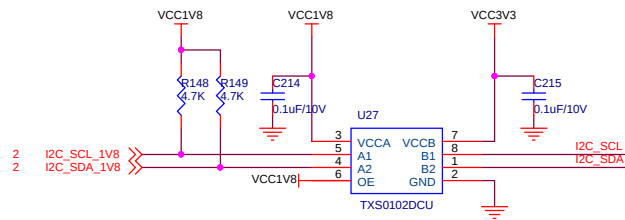












EEPROM

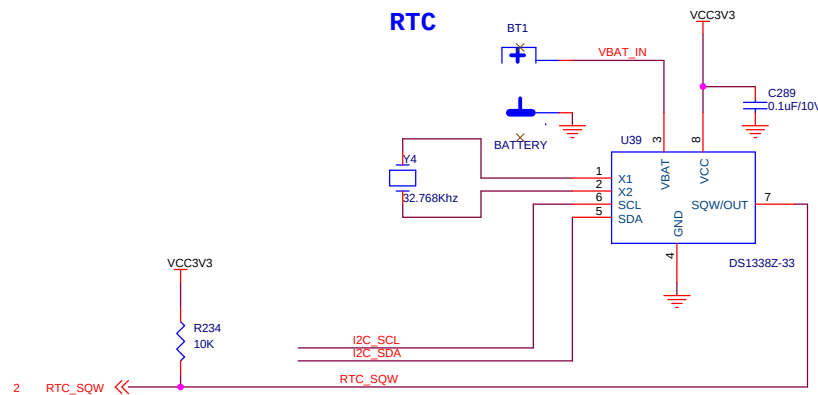


RTC



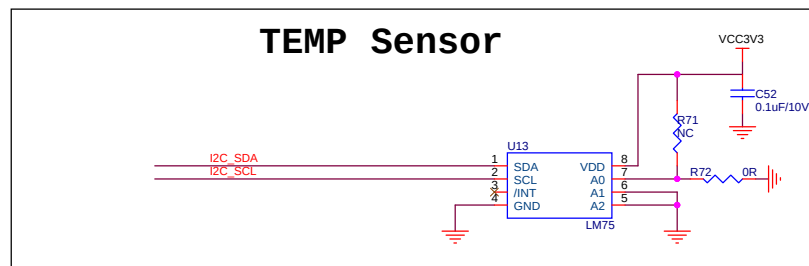


TEMP Sensor

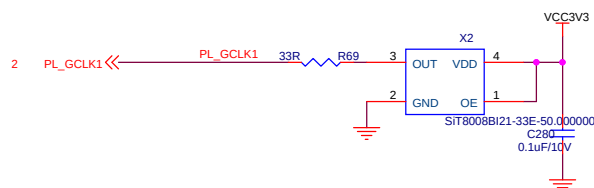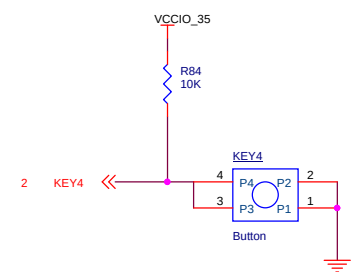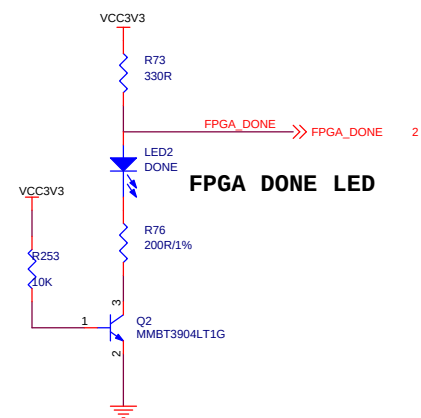


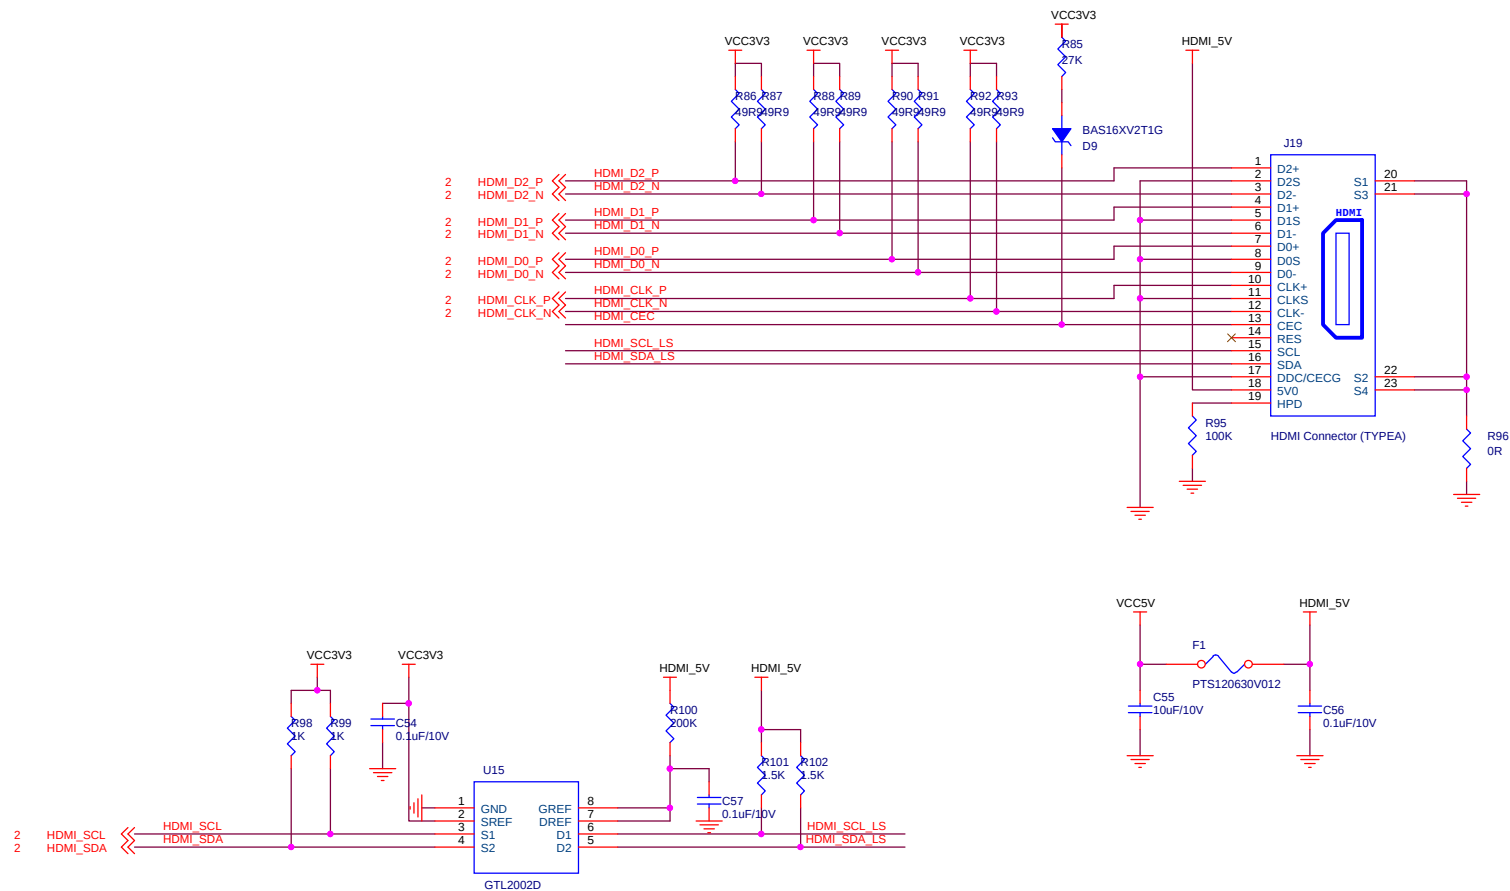


FPGA 40 PIN External IO ----3.3V Level

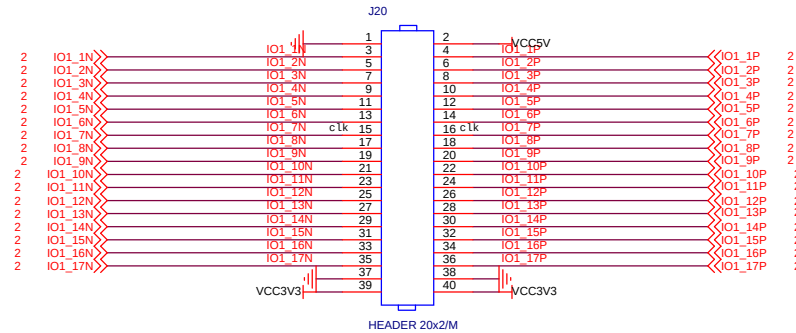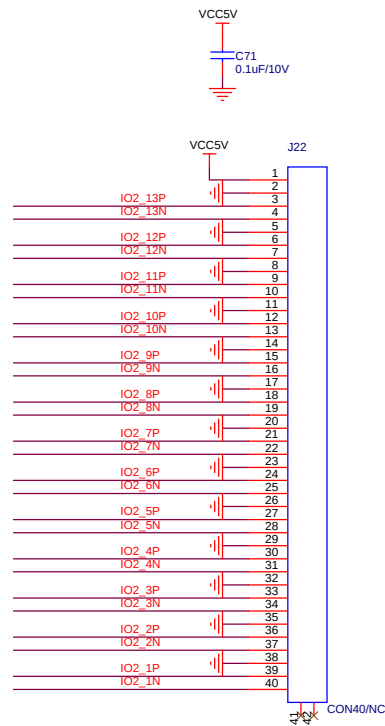

FPGA 40 PIN External IO ----ADJ


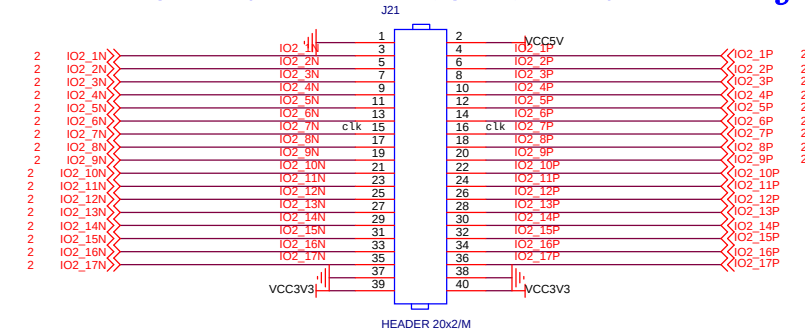


仅AC7Z7020板能用

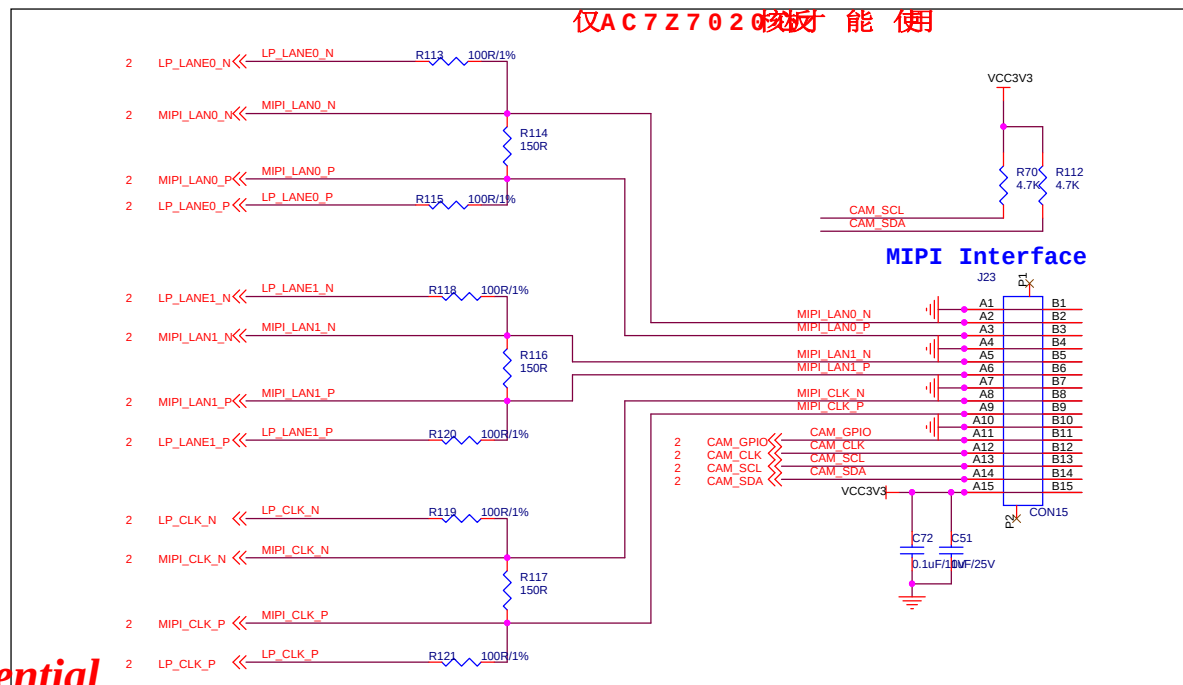


ALINX Confidential

5V/2A AC Adapter

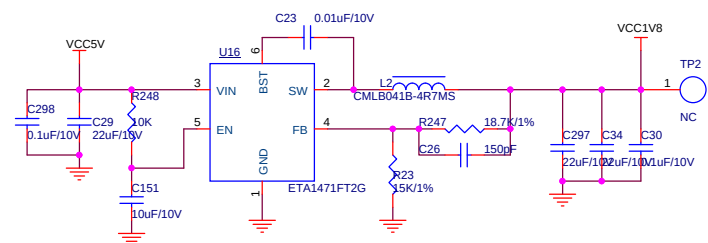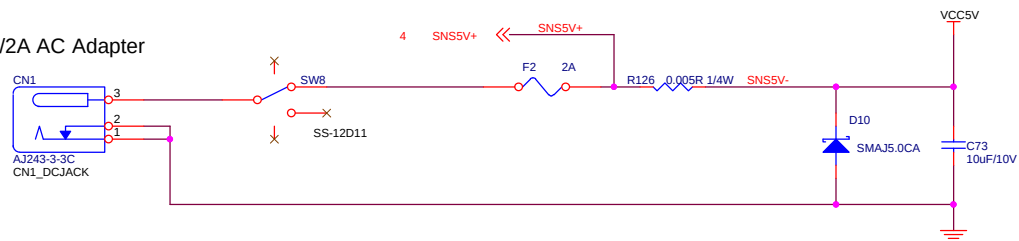

$$V_{out}=0.8 \times (1 + R1/R2)$$

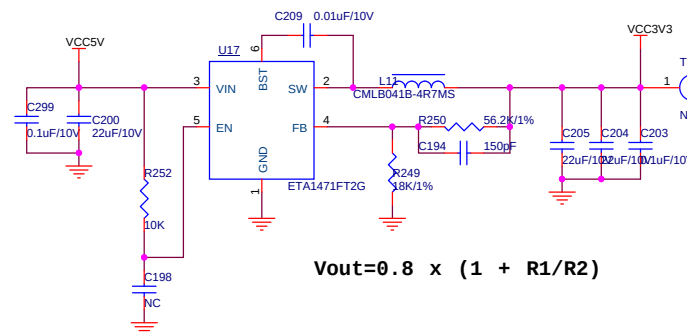


$$V_{out}=0.8 \times (1 + R1/R2)$$

J28/J29 OFF: 3.3V

J28 ON: 2.5V

J29 ON: 1.8V

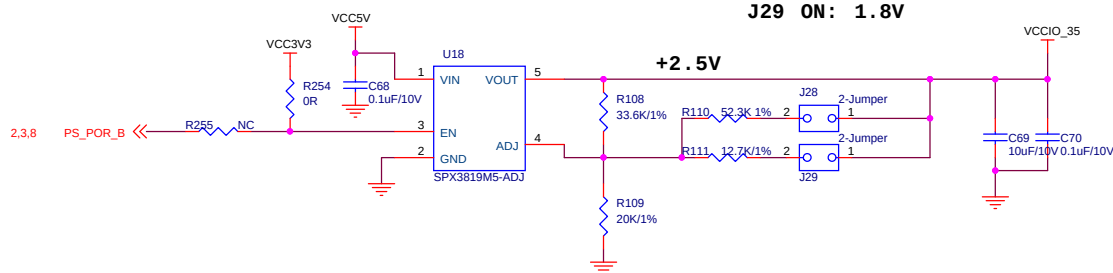

$$V_{OUT} = 1.235V \times [1 + R108/R109]$$

FAN

