

# **Multi-core RISC Processor Design and Implementation (Rev. 1.00)**

ELEC5881M - Interim Report

**Ben David Lancaster**  
Student ID: 201280376

Submitted in accordance with the requirements for the degree of  
Master of Science (MSc)  
in Embedded Systems Engineering

Supervisor: Dr. David Cowell  
Assessor: Mr David Moore

**University of Leeds**  
School of Electrical and Electronic Engineering

April 12, 2019

## Revision History

Date	Version	Changes
20/05/2018	3.14	Add background research to appendix.
19/05/2018	3.13	Update abstract to align with guidelines.
19/05/2018	3.12	Fix ISA pseudo-codes.
11/03/2018	1.00	Initial section outline.

**Table 1:** Document revisions.

# Abstract

Lorem ipsum dolor sit amet, consectetur adipiscing elit. Ut purus elit, vestibulum ut, placerat ac, adipiscing vitae, felis. Curabitur dictum gravida mauris. Nam arcu libero, nonummy eget, consectetur id, vulputate a, magna. Donec vehicula augue eu neque. Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Mauris ut leo. Cras viverra metus rhoncus sem. Nulla et lectus vestibulum urna fringilla ultrices. Phasellus eu tellus sit amet tortor gravida placerat. Integer sapien est, iaculis in, pretium quis, viverra ac, nunc. Praesent eget sem vel leo ultrices bibendum. Aenean faucibus. Morbi dolor nulla, malesuada eu, pulvinar at, mollis ac, nulla. Curabitur auctor semper nulla. Donec varius orci eget risus. Duis nibh mi, congue eu, accumsan eleifend, sagittis quis, diam. Duis eget orci sit amet orci dignissim rutrum.

Nam dui ligula, fringilla a, euismod sodales, sollicitudin vel, wisi. Morbi auctor lorem non justo. Nam lacus libero, pretium at, lobortis vitae, ultricies et, tellus. Donec aliquet, tortor sed accumsan bibendum, erat ligula aliquet magna, vitae ornare odio metus a mi. Morbi ac orci et nisl hendrerit mollis. Suspendisse ut massa. Cras nec ante. Pellentesque a nulla. Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus. Aliquam tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque cursus luctus mauris.

Nulla malesuada porttitor diam. Donec felis erat, congue non, volutpat at, tincidunt tristique, libero. Vivamus viverra fermentum felis. Donec nonummy pellentesque ante. Phasellus adipiscing semper elit. Proin fermentum massa ac quam. Sed diam turpis, molestie vitae, placerat a, molestie nec, leo. Maecenas lacinia. Nam ipsum ligula, eleifend at, accumsan nec, suscipit a, ipsum. Morbi blandit ligula feugiat magna. Nunc eleifend consequat lorem. Sed lacinia nulla vitae enim. Pellentesque tincidunt purus vel magna. Integer non enim. Praesent euismod nunc eu purus. Donec bibendum quam in tellus. Nullam cursus pulvinar lectus. Donec et mi. Nam vulputate metus eu enim. Vestibulum pellentesque felis eu massa.

# Acknowledgements

I would like to thank my project supervisors Nigel Barlow and Serge Thill for their support and guidance throughout this project.

I would also like to thank James Spalding (Spirent Communications) and firmware team for their encouragement, ideas, and industrial sponsorship supporting this final project.

# Declaration of Academic Integrity

The candidate confirms that the work submitted is his/her own, except where work which has formed part of jointly-authored publications has been included. The contribution of the candidate and the other authors to this work has been explicitly indicated in the report. The candidate confirms that appropriate credit has been given within the report where reference has been made to the work of others.

This copy has been supplied on the understanding that no quotation from the report may be published without proper acknowledgement. The candidate, however, confirms his/her consent to the University of Leeds copying and distributing all or part of this work in any forms and using third parties, who might be outside the University, to monitor breaches of regulations, to verify whether this work contains plagiarised material, and for quality assurance purposes.

The candidate confirms that the details of any mitigating circumstances have been submitted to the Student Support Office at the School of Electronic and Electrical Engineering, at the University of Leeds.

Name: Ben David Lancaster

Date: April 12, 2019

# Table of Contents

<b>1</b>	<b>Abstract (not in toc)</b>	<b>8</b>
<b>2</b>	<b>Declaration of Academic Integrity (not in toc)</b>	<b>9</b>
<b>3</b>	<b>Acknowledgements (not in toc)</b>	<b>10</b>
<b>4</b>	<b>Introduction</b>	<b>11</b>
4.1	Why Multi-core? . . . . .	11
4.2	Why RISC? . . . . .	11
4.3	Why FPGA? . . . . .	11
<b>5</b>	<b>Background</b>	<b>12</b>
5.1	Single core vs. Multi-core vs. Many-core . . . . .	12
5.2	Network-on-chip . . . . .	12
5.2.1	OpenPiton . . . . .	12
5.3	Summary . . . . .	12
<b>6</b>	<b>Project Overview</b>	<b>13</b>
6.1	Project Deliverables . . . . .	13
6.1.1	Core Deliverables (CD) . . . . .	13
6.1.2	Extended Deliverables (ED) . . . . .	13
6.2	Project Timeline . . . . .	14
6.2.1	Project Stages . . . . .	14
6.2.2	Timeline . . . . .	14
6.3	Resources . . . . .	16
6.3.1	Hardware Resources . . . . .	16
6.3.2	Software Resources . . . . .	17
<b>7</b>	<b>Current Progress</b>	<b>18</b>
7.1	RISC Core . . . . .	18
7.1.1	Instruction Set Architecture . . . . .	18
7.1.2	Design . . . . .	21
7.1.3	Implementation . . . . .	24
7.1.4	Verification . . . . .	25
<b>8</b>	<b>Future Progress</b>	<b>26</b>
8.1	Multi-core Functionality . . . . .	26
8.2	Interconnect Goals . . . . .	26
8.3	Interconnect Layout . . . . .	26

8.3.1	Bus Design	26
8.3.2	Core Pin Assignments	26
8.4	Core-to-core Communication	26
8.5	Shared-Resource Control	26
8.5.1	Resource Scheduling	26
8.6	Verification	26
8.7	Conclusion	26
<b>9</b>	<b>RISC Core Design</b>	<b>27</b>
9.1	Design Goals	28
9.2	Instruction Set Architecture	28
9.2.1	Data Sizes	28
9.2.2	Registers	28
9.2.3	Endianness	28
9.3	High Level Design	28
9.4	Memory-mapped peripherals	28
9.4.1	Wishbone Master Bus	28
9.5	Optimisations	28
9.5.1	Pipelining	28
9.5.2	Stall Avoidance	28
9.6	Core Verification	28
9.7	Conclusion	28
<b>10</b>	<b>Multi-core Communication Design</b>	<b>29</b>
10.1	Interconnect Goals	29
10.2	Interconnect Layout	29
10.2.1	Bus Design	29
10.2.2	Core Pin Assignments	29
10.3	Core-to-core Communication	29
10.4	Shared-Resource Control	29
10.4.1	Resource Scheduling	29
10.5	Verification	29
10.6	Conclusion	29
<b>11</b>	<b>Core Analysis</b>	<b>30</b>
11.1	FPGA Implementation Analysis	30
11.1.1	Space/Resource Usage	30
11.1.2	Static Timing Analysis	30
11.2	Speed Analysis	30
11.2.1	Parallel Reduction Algorithms	30
11.2.2	Parallel DFT Algorithm	30
<b>12</b>	<b>Conclusion</b>	<b>31</b>
12.1	RISC Core Review	31
12.2	Multi-core Review	31
12.3	Verification Review	31
12.4	Goal Review	31

[? ] [? ] [? ]



## **Chapter 1**

### **Abstract (not in toc)**

## **Chapter 2**

### **Declaration of Academic Integrity (not in toc)**

## **Chapter 3**

### **Acknowledgements (not in toc)**

# Chapter 4

## Introduction

4.1	Why Multi-core?	11
4.2	Why RISC?	11
4.3	Why FPGA?	11

### 4.1 Why Multi-core?

### 4.2 Why RISC?

### 4.3 Why FPGA?

# Chapter 5

## Background

5.1	Single core vs. Multi-core vs. Many-core	12
5.2	Network-on-chip	12
5.2.1	OpenPiton	12
5.3	Summary	12

### 5.1 Single core vs. Multi-core vs. Many-core

### 5.2 Network-on-chip

#### 5.2.1 OpenPiton

### 5.3 Summary

# Chapter 6

## Project Overview

6.1	Project Deliverables	13
6.1.1	Core Deliverables (CD)	13
6.1.2	Extended Deliverables (ED)	13
6.2	Project Timeline	14
6.2.1	Project Stages	14
6.2.2	Timeline	14
6.3	Resources	16
6.3.1	Hardware Resources	16
6.3.2	Software Resources	17

### 6.1 Project Deliverables

The project's deliverables are split into two sections: core deliverables (CD) – each deliverable must be satisfied for the project to be a minimum viable product (MVP), and extended deliverables (ED) – deliverables that are not required for a MVP – features that only improve upon an existing feature.

#### 6.1.1 Core Deliverables (CD)

The project's core deliverables are described below.

**CD1.** Design a compact 16-bit RISC instruction set architecture.

**CD2.** Design and implement a Verilog RISC core that implements the ISA in **CD1.**

**CD3.** Design and implement an on-chip interconnect for multi-core processing (2 to 32 cores) using the RISC core from **CD2.**

**CD4.** Analyse performance of serial and parallel software algorithms, such as parallel DFT [? ], on the processor.

**CD5.** Allow the RISC core to be easily compiled to multiple FPGA vendors (Xilinx, Altera).

#### 6.1.2 Extended Deliverables (ED)

The project's extended deliverables are described below.

- ED1.** Design a RISC core with an instructions-per-clock (IPC) rating of at least 1.0 (a single-cycle CPU).
- ED2.** Design a RISC core with a pipe-lined data path to increase the design's clock speed.
- ED3.** Design a scalable multi-core interconnect supporting arbitrary (more than 32) RISC core instances (manycore) using Network-on-Chip (NoC) architecture.
- ED4.** Design a compiler-backend for the PRCO304 [?] compiler to support the ISA from1 [CD1](#). This will make it easier to build complex multi-core software for the processor.
- ED5.** The RISC core can communicate to peripherals via a memory-mapped addresses using the Wishbone [?] bus.
- ED6.** Implement various memory-mapped peripherals such as UART, GPIO, LCD, to aid visual representation of the processor during the demonstration viva.
- ED7.** Store instruction memory in SPI flash.
- ED8.** Reprogram instruction memory at runtime from host computer.
- ED9.** Processor external debugger using host-processor link.

## 6.2 Project Timeline

### 6.2.1 Project Stages

The project is split up into many stages to aid planning and management of the project. There are 8 unique stage areas: 1. Initial project conception; 2 Basic RISC core development; 3. Extended RISC core development; 4. Multi-core development; 5. Processor quality-of-life (QoL) improvements; 6. Compiler development; 7. Demo preparation, and 8. Final report.

The project stages are shown in Table [7.1](#).

### 6.2.2 Timeline

The project stages from Table [7.1](#) are displayed below in a Gantt chart.

Stage	Title	Start Date	Days	Core	Applicable Deliverables
1.0	Research	Feb 04	7	x	
1.1	Requirement gathering/review	Feb 11	14	x	
1.1	Processor specification, architecture, ISA	Feb 18	100	x	CD1.
1.2	Stage/Time Allocation Planning	Feb 25	7	x	
2.1	Decoder, Register Set, impl & integration	Feb 25	14	x	CD2.
2.2	Register set impl & integration	Mar 04	14	x	CD2.
2.3	Local memory impl & integration	Mar 11	14	x	CD2.
3.1	Memory mapped register layout & impl	Apr 01	21		ED5.
3.2	Wishbone peripheral bus connected to MMU	Apr 08	21		ED5.
3.3	Pipelined implementation and verification	Apr 15	21		ED2.
3.4	Cache memory design & impl	Apr 22	28		ED2.
4.1	Multi-core communication interface	TBD	TBD	x	CD3.
4.2	Shared-memory controller	TBD	TBD	x	CD3.
4.3	Scalable multi-core interface (10s of cores)	TBD	TBD	x	CD3.
4.4	Multi-core example program (reduction)	TBD	TBD	x	CD4.
5.1	SPI-FPGA interface for OTG programming	TBD	TBD		ED7.
5.2	FPGA-PC interfacing	TBD	TBD		ED9.
5.3	FPGA-PC debugging (instruction breakpoints)	TBD	TBD		ED9.
6.1	Compiler backend for vmicro16	TBD	TBD		ED4.
6.2	Compiler support for multi-core codegen	TBD	TBD		ED4.
7.1	Wishbone peripherals for demo	TBD	TBD	x	CD4.
8.1	Final Report	TBD	TBD	x	

Table 6.1: Project stages throughout the life cycle of the project.

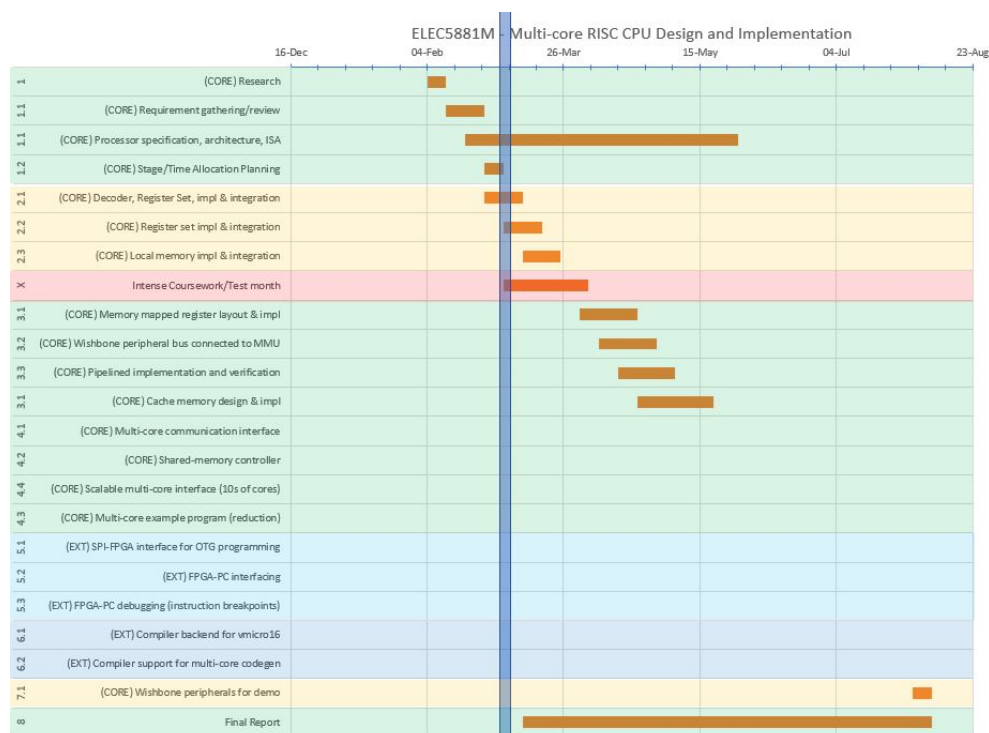


Figure 6.1: Project stages in a Gantt chart.




## 6.3 Resources

This section describes the hardware and software resources required to design and implement the project.

### 6.3.1 Hardware Resources


The designed Verilog RISC core will be implemented and deployed to FPGAs.

#### Terasic DE1-SoC Development Board

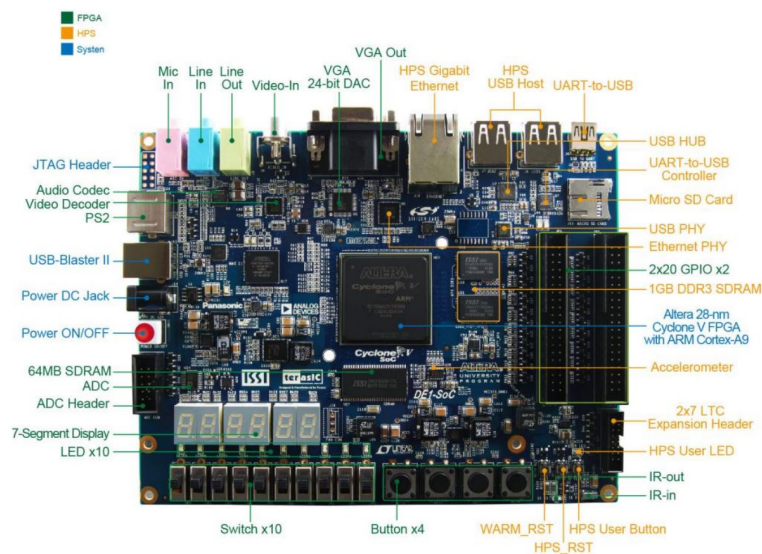

**Figure 6.2:** Terasic DE1-SoC development board featuring the Altera Cyclone V FPGA and many peripherals. Image source: [?] ].

#### Minispartan 6+ FPGA Development Board

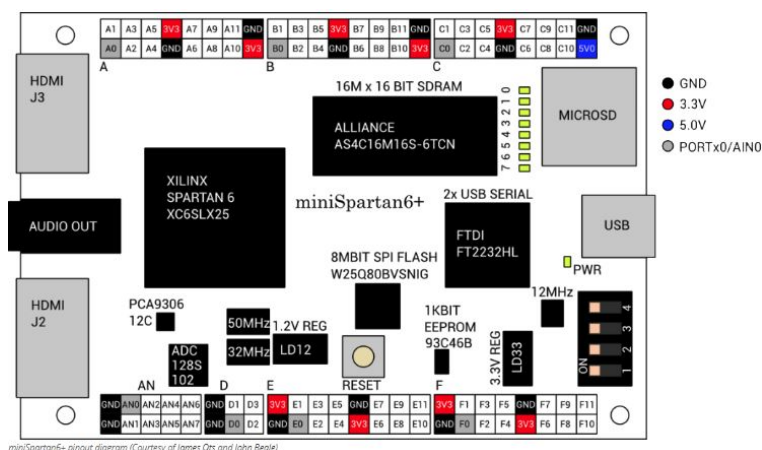

**Figure 6.3:** Minispartan-6+ development board featuring the Xilinx Spartan 6 XC6SLX9. Image source: [?] ].

Testing testing

### **6.3.2 Software Resources**

**Xilinx ISE**

**Intel Quartus**

# Chapter 7

## Current Progress

7.1	RISC Core	18
7.1.1	Instruction Set Architecture	18
7.1.2	Design	21
7.1.3	Implementation	24
7.1.4	Verification	25

This chapter discusses the current progress made towards the project, including designs, implementation, and current results.

### 7.1 RISC Core

Following the project time line described in section 6.2, the first couple months have been dedicated to the design and implementation of the instruction set architecture and RISC core with stages 1-3. Good progress has been made in both deliverables, the ISA and the RISC core, and the progress is on-time with the initial project time line.

#### 7.1.1 Instruction Set Architecture

A 16-bit instruction set architecture (ISA) has been designed using an iterative approach. There currently exists 32 unique instructions covering most generic RISC operations (add, load/store, branch, compare, etc.) and atleast 16 opcodes available to be provide multi-core communication and functionality. This number should be adequate to support these features when the work begins on the multi-core project stages (stages 4-7).

#### Design Goals

Having past experience designing and implementing ISAs for previous projects, I wanted to use that knowledge to design an even more efficient and compact instruction set that could provide much greater functionality. The technical design goals of the ISA are described below:

##### **ISA1. Use a fixed width of 16-bits for all instructions.**

This will significantly reduce RTL resources and encourage efficiency by not wasting spare bits. In addition, many SPI flash and RAMs support 16-bit wide data reads which will allow each instruction fetch to only require one clock cycle, thus increasing processor performance.

**ISA2. Be able to select at least two registers for common instructions.**

This will reduce the number of required instructions to manipulate register data. A disadvantage of using two instead of three register selects is that instructions are always destructive – they always *destroy* existing data in the destination register (e.g.  $R0 = \text{ADD } R0 \ R1$ ) unlike constructive instructions that provide a unique register select for the destination (e.g.  $R2 = \text{ADD } R0 \ R1$ ).

**ISA3. Reduce bit-space for frequently used instructions (MOV, MOVI, ADD).**

Due to the 16-bit limit, two register selects, and immediate values, the opcode bits are reduced resulting in fewer unique instructions. To overcome this constraint, spare bits in other instructions will be appended to the opcode bits to extend the opcode range. This however, will require a more complex decoder that must first switch the opcode, then switch any spare bits to determine the final opcode. This method will significantly increase the number of unique instructions provided by the instruction set.

**ISA4. Provide frequently used actions as options for existing instructions.**

In software, frequently used actions include incrementing/decrementing by 1 and performing logical comparisons which usually take more than one instruction on some RISC architectures. As they are common actions, the instruction overhead and time may be significant and can affect performance. To provide a solution to this problem, in addition to using spare bits to extend the opcode range, spare bits will be used to signify a frequently used action to be performed by the ALU.

As shown in Figure 7.1, frequently used commands such as incrementing/decrementing and logical comparisons are provided by setting spare bits to special values. For example, the instructions `ARITH_UADDI` and `ARITH_SSUBI` extend the `ARITH_U` and `ARITH_S` opcodes by filling the spare bit, 4. If this bit is not set (0), the instruction allows for a 4-bit immediate value to be added in addition to the two register selects. The 4-bit immediate allows adding a small number to the ALU which is useful in the case of software for loops where an increment/decrement of more than 1 is required.

Another example is the `SETC` instruction. Inspired by Intel's x86 `SETCC`, the instruction sets the destination register to zero or one depending on the result of the `CMP` instruction's flags. Without this instruction, multiple branches would be required to convert the comparison's flags to logical zeros and ones.

**ISA5. Provide instructions for performing bitwise manipulations.**

RISC processors are commonly used for microprocessing and microcontroller actions which typically includes bit manipulation. The ISA provides bitwise OR, XOR, AND, NOT, and shifting instructions under a single opcode to fill this need.

**ISA6. Provide instructions for explicitly performing signed and unsigned arithmetic.**

Performing signed and unsigned arithmetic is a key requirement for RISC applications and so it was decided to provide such instructions. Software programmers can easily switch between signed and unsigned arithmetic by setting bit 11 in the `ARITH` instruction family. Being able to change between signed and unsigned arithmetic instructions by changing a single bit will make the RISC processor's decoder module smaller and less complex.

Without explicit unsigned and signed instructions, extra instructions would be required to perform addition and subtraction. In addition, due to two's complement representation of signed numbers, the highest immediate operand value would be halved, resulting in more instructions to reach the desired value.

	15-11	10-8	7-5	4-0	rd ra simm5
	15-11	10-8	7-0		rd imm8
	15-11	10-0			nop
	15	14:12	11:0		extended immediate
NOP	00000		X		
LW	00001	Rd	Ra	s5	Rd <= RAM[Ra+s5]
SW	00010	Rd	Ra	s5	RAM[Ra+s5] <= Rd
<b>BIT</b>	<b>00011</b>	<b>Rd</b>	<b>Ra</b>	<b>s5</b>	<b>bitwise operations</b>
BIT_OR	00011	Rd	Ra	00000	Rd <= Rd   Ra
BIT_XOR	00011	Rd	Ra	00001	Rd <= Rd ^ Ra
BIT_AND	00011	Rd	Ra	00010	Rd <= Rd & Ra
BIT_NOT	00011	Rd	Ra	00011	Rd <= ~Ra
BIT_LSHFT	00011	Rd	Ra	00100	Rd <= Rd << Ra
BIT_RSHFT	00011	Rd	Ra	00101	Rd <= Rd >> Ra
MOV	00100	Rd	Ra	X	Rd <= Ra
MOVI	00101	Rd		i8	Rd <= i8
<b>ARITH_U</b>	<b>00110</b>	<b>Rd</b>	<b>Ra</b>	<b>s5</b>	<b>unsigned arithmetic</b>
ARITH_UADD	00110	Rd	Ra	11111	Rd <= uRd + uRa
ARITH_USUB	00110	Rd	Ra	10000	Rd <= uRd - uRa
ARITH_UADDI	00110	Rd	Ra	0AAAA	Rd <= uRd + Ra + AAAA
<b>ARITH_S</b>	<b>00111</b>	<b>Rd</b>	<b>Ra</b>	<b>s5</b>	<b>signed arithmetic</b>
ARITH_SADD	00111	Rd	Ra	11111	Rd <= sRd + sRa
ARITH_SSUB	00111	Rd	Ra	10000	Rd <= sRd - sRa
ARITH_SSUBI	00111	Rd	Ra	0AAAA	Rd <= sRd - sRa + AAAA
<b>BR</b>	<b>01000</b>	<b>Rd</b>		<b>i8</b>	<b>conditional branch</b>
BR_U	01000	Rd		0000 0000	Any
BR_E	01000	Rd		0000 0001	Z=1
BR_NE	01000	Rd		0000 0010	Z=0
BR_G	01000	Rd		0000 0011	Z=0 and S=0
BR_GE	01000	Rd		0000 0100	S=0
BR_L	01000	Rd		0000 0101	S != 0
BR_LE	01000	Rd		0000 0110	Z=1 or (S != 0)
BR_S	01000	Rd		0000 0111	S=1
BR_NS	01000	Rd		0000 1000	S=0
CMP	01001	Rd	Ra	X	SZO <= CMP(Rd, Ra)
SETC	01010	Rd	Ra	X	Rd <= Imm8 == SZO ? 1 : 0
<b>MOVI_LARGE</b>	<b>1</b>	<b>Rd</b>	<b>i12</b>		<b>Rd &lt;= i12</b>

**Figure 7.1:** Initial Vmicro16 16-bit instruction set architecture. Coloured regions represent instruction families (bitwise, branching, arithmetic, etc.).

The ISA table is shown in Figure 7.1. The top 5 bits (15-11) are dedicated to the opcode resulting in 32 unique values. Currently only the bits 14-11 are used (NOP to SETC) leaving the top bit spare. Initially, this bit was reserved to indicate an extended immediate instruction, MOVI12, supporting a large 12-bit immediate value, however later in the design it was decided that the top bit would indicate special instructions dedicated for multi-core operation. This leaves 16 spare unique opcodes for this purpose.

### 7.1.2 Design

The RISC core design is a traditional 5-stage processor (fetch, decode, execute, memory, write-back).

#### Instruction and Data Memory

The design uses separate instruction and data memories similar to a Harvard architecture computer. This architecture was chosen due to its simplicity to implement.

#### Register File

To support design goal [ISA2.](#), the register set features a dual-port read and single-port write. This allows instructions to read 2 registers simultaneously for any instruction. The single-port write allows the instruction output to be written to the register file.

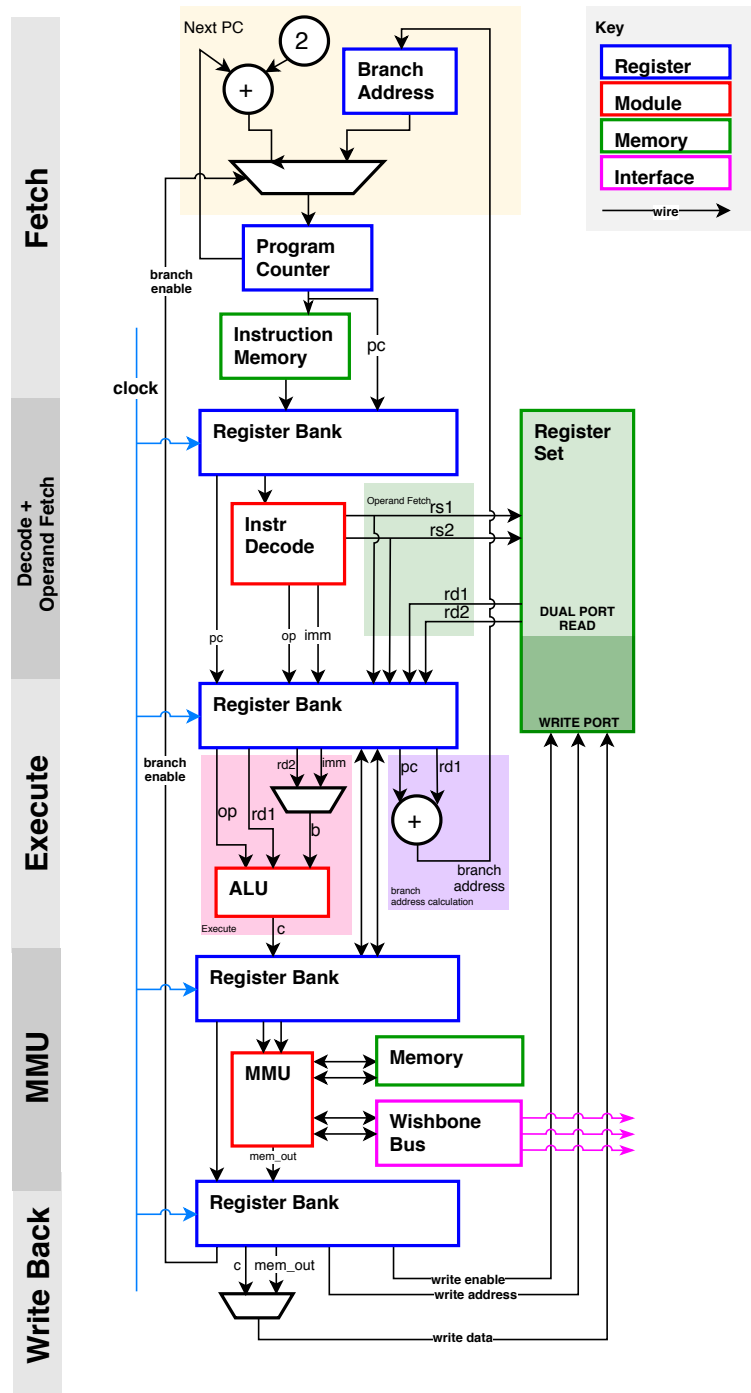


Figure 7.2: Vmicro16 RISC 5-stage RTL diagram.

## Pipelining

The extended deliverable **ED1**, to provide atleast 1 instructions per clock

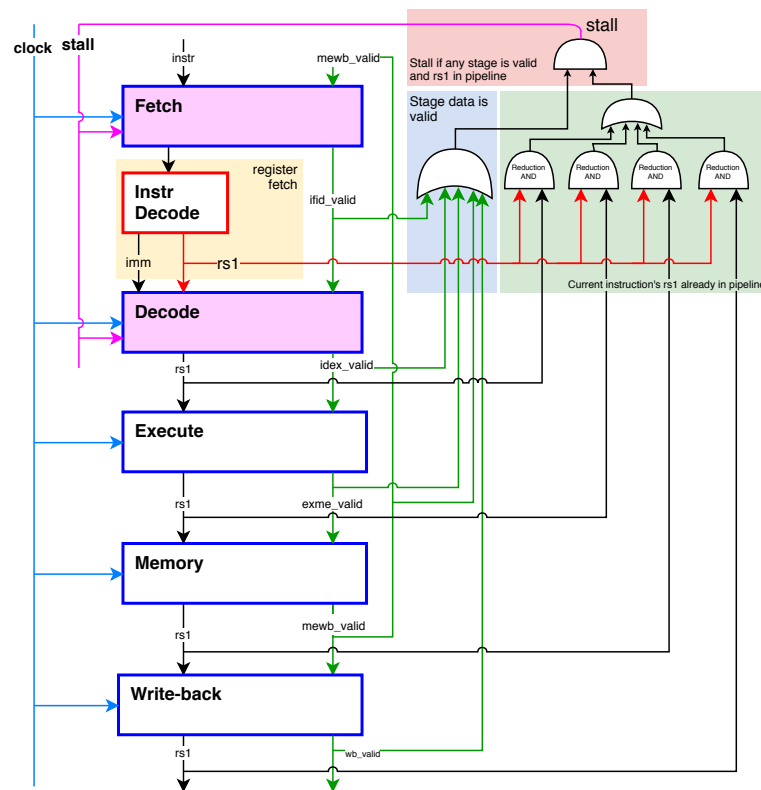


Figure 7.3: Pipeline stall detection logic.

## Memory Management Unit

It was decided to use a memory management unit (MMU) to make it easier and extensible to communicate with external peripherals or additional registers. This method would transparently use the existing LW/SW instructions which removes the requirement for a unique instruction for each peripheral.

## Proposed Memory Mapped Addresses

The proposed memory mapped addresses for each system and peripheral are listed below.

Address (16-bit aligned)	Peripheral Name
0x0000	NOP (reads returns 0, writes do nothing)
0x00ZZ	Per-core scratch RAM (ZZ = 8-bit RAM address)
0x0100	Extended Core Registers 1
0x0200	Extended Core Registers 2
0x03ZZ	Wishbone Master controller select (ZZ contains 8-bit wishbone slave address)
0x1XYZ	Master core controller (X = slave select, Y = instruction, Z = data)

Table 7.1: Project stages throughout the life cycle of the project.



### 7.1.3 Implementation

To satisfy [CD5](#), the Verilog code will be self-contained in a single file. This reduces the hierarchical complexity and eases cross-vendor project set-up as only a single file is required to be included.

A disadvantage with this single file approach is that some external Verilog verification tools that I plan to use, such as Verilator, do not currently support multiple Verilog modules (due to an unfixed bug) within a single file.

#### Decoder Implementation

```

224     always @(*) case (opcode)
225         `VMICRO16_OP_HALT, // TODO: stop ifid
226         `VMICRO16_OP_NOP:      alu_op = `VMICRO16_ALU_NOP;
227
228         `VMICRO16_OP_LW:      alu_op = `VMICRO16_ALU_LW;
229         `VMICRO16_OP_SW:      alu_op = `VMICRO16_ALU_SW;
230
231         `VMICRO16_OP_MOV:      alu_op = `VMICRO16_ALU_MOV;
232         `VMICRO16_OP_MOVI:     alu_op = `VMICRO16_ALU_MOVI;
233         `VMICRO16_OP_MOVI_L:   alu_op = `VMICRO16_ALU_MOVI_L;
234
235         `VMICRO16_OP_BR:      alu_op = `VMICRO16_ALU_BR;
236
237         `VMICRO16_OP_BIT:      casez (simm5)
238             `VMICRO16_OP_BIT_OR:      alu_op = `VMICRO16_ALU_BIT_OR;
239             `VMICRO16_OP_BIT_XOR:     alu_op = `VMICRO16_ALU_BIT_XOR;
240             `VMICRO16_OP_BIT_AND:     alu_op = `VMICRO16_ALU_BIT_AND;
241             `VMICRO16_OP_BIT_NOT:     alu_op = `VMICRO16_ALU_BIT_NOT;
242             `VMICRO16_OP_BIT_LSHFT:   alu_op = `VMICRO16_ALU_BIT_LSHFT;
243             `VMICRO16_OP_BIT_RSHFT:   alu_op = `VMICRO16_ALU_BIT_RSHFT;
244             default:                  alu_op = `VMICRO16_ALU_BAD; endcase
245     endcase

```

**Figure 7.4:** Vmicro16's decoder module code showing nested bit switches to determine the intended opcode. vmicro16.v

In [Figure 7.4](#), it can be seen that the first 8 opcode cases are represented using the same 15-11 bits, however the VMICRO16\_OP\_BIT instructions require another bit range to be compared to determine the output opcode.

## ALU Implementation

```

322     always @(*) case (op)
323         // branch/nop, output nothing
324         `VMICRO16_ALU_BR,
325         `VMICRO16_ALU_NOP:      q = 0;
326         // load/store addresses (use value in rd2)
327         `VMICRO16_ALU_LW,
328         `VMICRO16_ALU_SW:      q = d2;
329         // bitwise operations
330         `VMICRO16_ALU_BIT_OR:   q = d1 | d2;
331         `VMICRO16_ALU_BIT_XOR:  q = d1 ^ d2;
332         `VMICRO16_ALU_BIT_AND:  q = d1 & d2;
333         `VMICRO16_ALU_BIT_NOT:  q = ~(d2);
334         `VMICRO16_ALU_BIT_LSHFT: q = d1 << d2;
335         `VMICRO16_ALU_BIT_RSHFT: q = d1 >> d2;

```

Figure 7.5: Vmicro16’s decoder module code showing nested bit switches to determine the intended opcode. vmicro16.v

### 7.1.4 Verification

# Chapter 8

## Future Progress

8.1	Multi-core Functionality . . . . .	26
8.2	Interconnect Goals . . . . .	26
8.3	Interconnect Layout . . . . .	26
8.3.1	Bus Design . . . . .	26
8.3.2	Core Pin Assignments . . . . .	26
8.4	Core-to-core Communication . . . . .	26
8.5	Shared-Resource Control . . . . .	26
8.5.1	Resource Scheduling . . . . .	26
8.6	Verification . . . . .	26
8.7	Conclusion . . . . .	26

### 8.1 Multi-core Functionality

### 8.2 Interconnect Goals

### 8.3 Interconnect Layout

#### 8.3.1 Bus Design

#### 8.3.2 Core Pin Assignments

### 8.4 Core-to-core Communication

### 8.5 Shared-Resource Control

#### 8.5.1 Resource Scheduling

### 8.6 Verification

### 8.7 Conclusion

## Chapter 9

# RISC Core Design

9.1	Design Goals . . . . .	28
9.2	Instruction Set Architecture . . . . .	28
9.2.1	Data Sizes . . . . .	28
9.2.2	Registers . . . . .	28
9.2.3	Endianness . . . . .	28
9.3	High Level Design . . . . .	28
9.4	Memory-mapped peripherals . . . . .	28
9.4.1	Wishbone Master Bus . . . . .	28
9.5	Optimisations . . . . .	28
9.5.1	Pipelining . . . . .	28
9.5.2	Stall Avoidance . . . . .	28
9.6	Core Verification . . . . .	28
9.7	Conclusion . . . . .	28

## **9.1 Design Goals**

## **9.2 Instruction Set Architecture**

### **9.2.1 Data Sizes**

### **9.2.2 Registers**

### **9.2.3 Endianness**

## **9.3 High Level Design**

## **9.4 Memory-mapped peripherals**

### **9.4.1 Wishbone Master Bus**

## **9.5 Optimisations**

### **9.5.1 Pipelining**

### **9.5.2 Stall Avoidance**

## **9.6 Core Verification**

## **9.7 Conclusion**

# Chapter 10

## Multi-core Communication Design

10.1 Interconnect Goals . . . . .	29
10.2 Interconnect Layout . . . . .	29
10.2.1 Bus Design . . . . .	29
10.2.2 Core Pin Assignments . . . . .	29
10.3 Core-to-core Communication . . . . .	29
10.4 Shared-Resource Control . . . . .	29
10.4.1 Resource Scheduling . . . . .	29
10.5 Verification . . . . .	29
10.6 Conclusion . . . . .	29

### 10.1 Interconnect Goals

### 10.2 Interconnect Layout

#### 10.2.1 Bus Design

#### 10.2.2 Core Pin Assignments

### 10.3 Core-to-core Communication

### 10.4 Shared-Resource Control

#### 10.4.1 Resource Scheduling

### 10.5 Verification

### 10.6 Conclusion

# Chapter 11

## Core Analysis

11.1	FPGA Implementation Analysis . . . . .	30
11.1.1	Space/Resource Usage . . . . .	30
11.1.2	Static Timing Analysis . . . . .	30
11.2	Speed Analysis . . . . .	30
11.2.1	Parallel Reduction Algorithms . . . . .	30
11.2.2	Parallel DFT Algorithm . . . . .	30

### 11.1 FPGA Implementation Analysis

#### 11.1.1 Space/Resource Usage

#### 11.1.2 Static Timing Analysis

### 11.2 Speed Analysis

#### 11.2.1 Parallel Reduction Algorithms

#### 11.2.2 Parallel DFT Algorithm

## Chapter 12

# Conclusion

12.1 RISC Core Review . . . . .	31
12.2 Multi-core Review . . . . .	31
12.3 Verification Review . . . . .	31
12.4 Goal Review . . . . .	31

### 12.1 RISC Core Review

### 12.2 Multi-core Review

### 12.3 Verification Review

### 12.4 Goal Review