


- Mettere in comunicazione il laptop-PT0 con IP 192.168.100.100 con il laptop-PT2 con IP 192.168.200.100

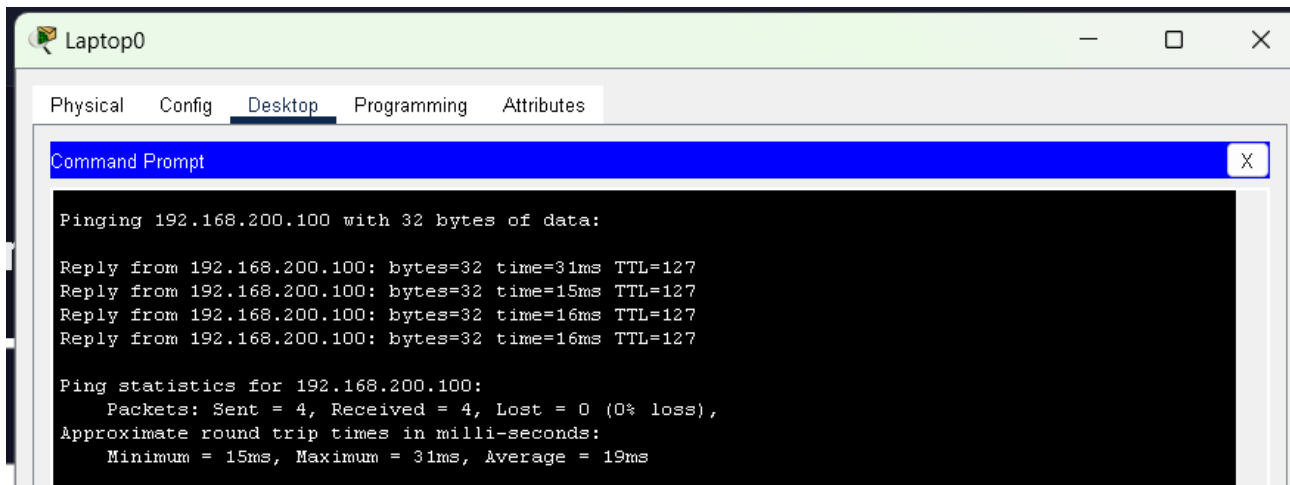

The screenshot shows a Packet Tracer interface for a device named 'Laptop0'. The 'Desktop' tab is selected, displaying a 'Command Prompt' window. The command prompt shows the execution of a 'ping' command to the IP address 192.168.200.100. The output indicates that the ping was successful, with 4 packets sent and 4 received, resulting in 0% loss. The round trip times are listed as Minimum = 15ms, Maximum = 31ms, and Average = 19ms.

```
Pinging 192.168.200.100 with 32 bytes of data:  
  
Reply from 192.168.200.100: bytes=32 time=31ms TTL=127  
Reply from 192.168.200.100: bytes=32 time=15ms TTL=127  
Reply from 192.168.200.100: bytes=32 time=16ms TTL=127  
Reply from 192.168.200.100: bytes=32 time=16ms TTL=127  
  
Ping statistics for 192.168.200.100:  
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),  
Approximate round trip times in milli-seconds:  
    Minimum = 15ms, Maximum = 31ms, Average = 19ms
```