


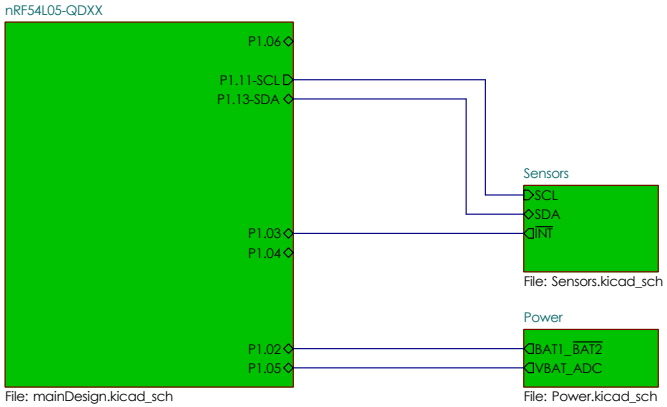


Sheet: / File: Aura-Lite.kicad_sch		
Title:		
Size: A4	Date:	**Rev:**
KiCad E.D.A. 10.0.0		Id: 1/4


nRF54L05-QDXX

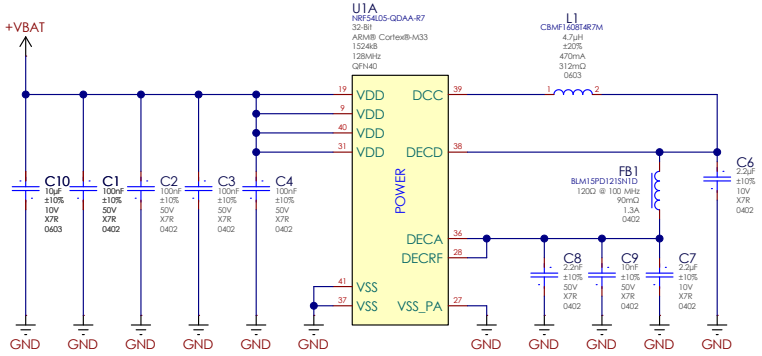

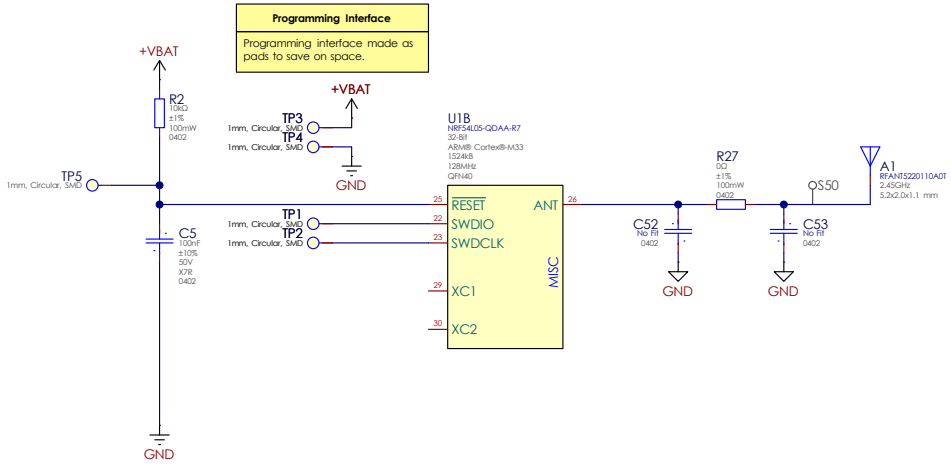

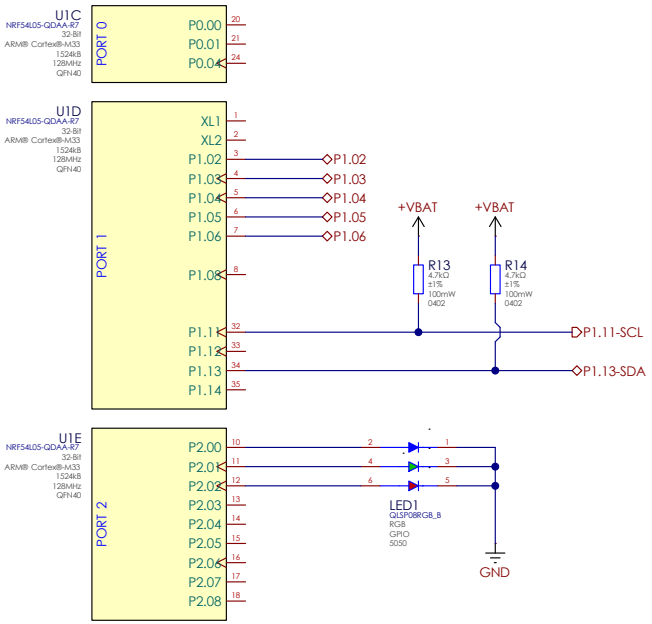

AETHERFIELD LTD.		
Sheet: /nRF54L05-QDXX/ File: mainDesign.kicad_sch		
Title:		
Size: A4	Date:	**Rev:**
KiCad E.D.A. 10.0.0		Id: 4/4

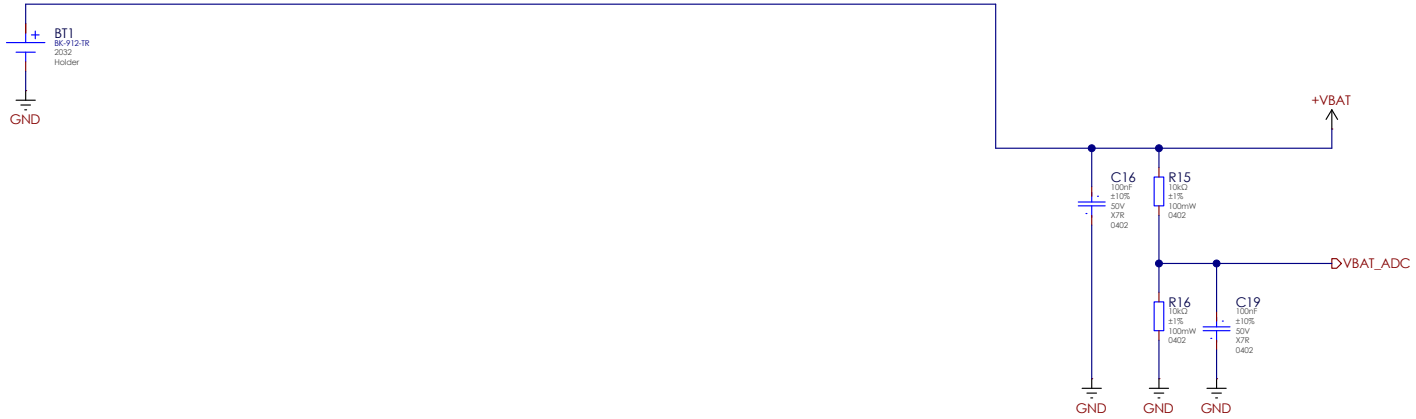

Priority Selection

If the voltages at VIN1 and VIN2 are similar, the system prioritizes VIN1.


This prioritization is implemented by utilizing only the internal comparator of the VIN1 controller to determine power presence. The $\overline{CE}$ (chip enable) pin of the VIN2 controller is treated as a digital control input, controlled by the output state of the VIN1 controller. This effectively enables or disables the VIN2 path based on VIN1's status, ensuring VIN1 takes precedence when both sources are present.

Without this prioritisation, both controllers could turn off the output when the VIN1 and VIN2 supplies are similar in voltage.

Sheet: /Power/
File: Power.kicad_sch

Title:

Size: A4	Date:	**Rev:**
KiCad E.D.A. 10.0.0		Id: 6/4

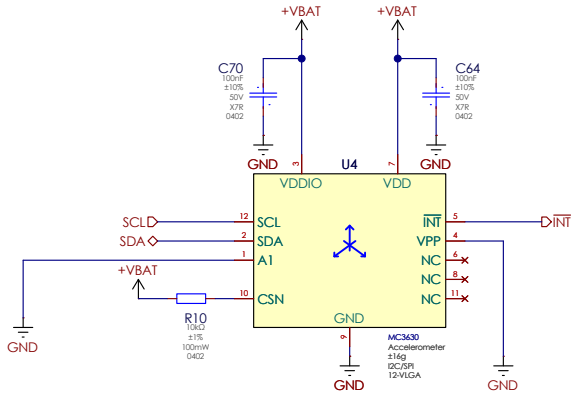

Sheet: /Sensors/ File: Sensors.kicad_sch		
Title:		
Size: A4	Date:	**Rev:**
KiCad E.D.A. 10.0.0		Id: 7/4