

|             |         |          |      |
|-------------|---------|----------|------|
| VOR/DME EWC | APP CRS | Rwy Ldg  | 4501 |
| 115.8       | 256°    | TDZE     | 1253 |
| Chan 105    |         | Apt Elev | 1253 |



VOR RWY 28  
BEAVER COUNTY (BVI)

⚠

When local altimeter setting not received, use Pittsburgh Intl altimeter setting and increase MDAs 60 feet and visibility Circling Cats A and D ¼ SM and ZUDLO fix minimums S-28 Cats C/D ¼ SM and Circling Cat C ½ SM. Straight-in Rwy 28 NA at night, Circling Rwy 28 NA at night. Rwy 28 helicopter visibility reduction below 1 SM NA.

MISSED APPROACH: Climb to 3000 then right turn direct EWC VOR/DME and hold.

|                |                             |                                         |                  |
|----------------|-----------------------------|-----------------------------------------|------------------|
| ATIS<br>118.35 | PITTSBURGH APP CON<br>338.2 | BEAVER COUNTY TOWER ★<br>120.3 (CTAF) 0 | GND CON<br>121.8 |
|----------------|-----------------------------|-----------------------------------------|------------------|

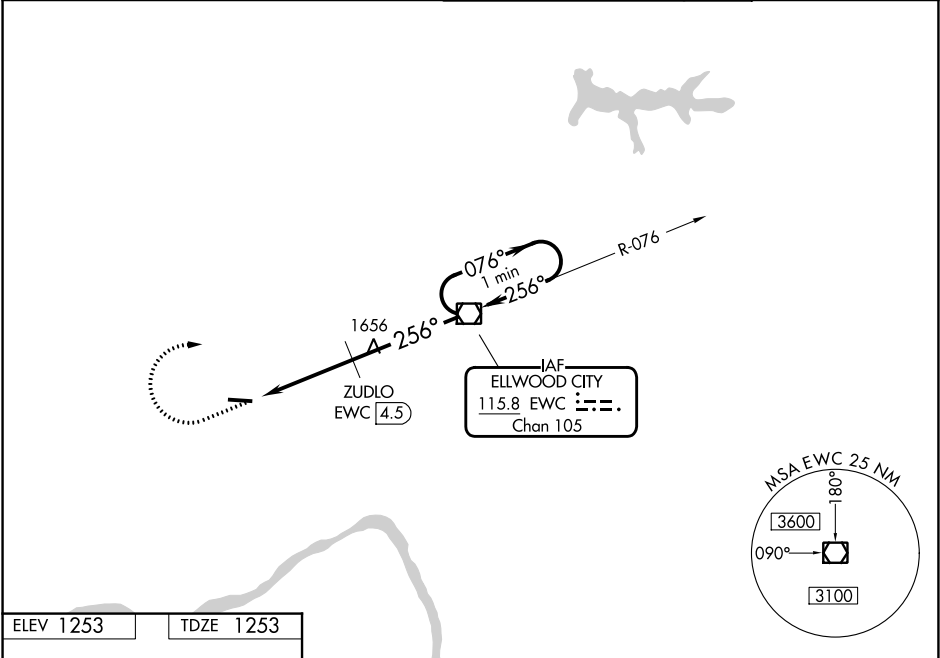

ELEV 1253

TDZE 1253

MIRL Rwy 10-28 0

REIL Rwys 10 and 28 0

FAF to MAP 8.5 NM

|         |      |      |      |      |      |
|---------|------|------|------|------|------|
| Knots   | 60   | 90   | 120  | 150  | 180  |
| Min:Sec | 8:30 | 5:40 | 4:15 | 3:24 | 2:50 |

|                                                                                             |                       |                                                                                            |                           |                |                                                         |                               |                       |
|---------------------------------------------------------------------------------------------|-----------------------|--------------------------------------------------------------------------------------------|---------------------------|----------------|---------------------------------------------------------|-------------------------------|-----------------------|
| 3000<br> |                       | EWC<br> |                           | EWC<br>VOR/DME |                                                         | One Minute<br>Holding Pattern |                       |
|          |                       | EWC<br>8.5                                                                                 | ZUDLO<br>EWC 4.5          |                | * 2120 when using Pittsburgh<br>Intl altimeter setting. |                               |                       |
|          |                       | 4 NM                                                                                       |                           | 4.5 NM         |                                                         |                               |                       |
| CATEGORY                                                                                    | A                     |                                                                                            | B                         |                | C                                                       |                               | D                     |
| S-28                                                                                        | 2060-1<br>807 (900-1) |                                                                                            | 2060-1 ¼<br>807 (900-1 ¼) |                | 2060-2 ½                                                |                               | 807 (900-2 ½)         |
| CIRCLING                                                                                    | 2060-2                |                                                                                            | 807 (900-2)               |                | 2060-2 ½                                                |                               | 807 (900-2 ½)         |
| ZUDLO FIX MINIMUMS (DME REQUIRED)                                                           |                       |                                                                                            |                           |                |                                                         |                               |                       |
| S-28                                                                                        | 1740-1                |                                                                                            | 487 (500-1)               |                | 1740-1 ¾                                                |                               | 487 (500-1 ¾)         |
| CIRCLING                                                                                    | 1740-1                |                                                                                            | 487 (500-1)               |                | 1740-1 ½<br>487 (500-1 ½)                               |                               | 1820-2<br>567 (600-2) |

NE-4, 03 SEP 2026 to 01 OCT 2026

NE-4, 03 SEP 2026 to 01 OCT 2026