
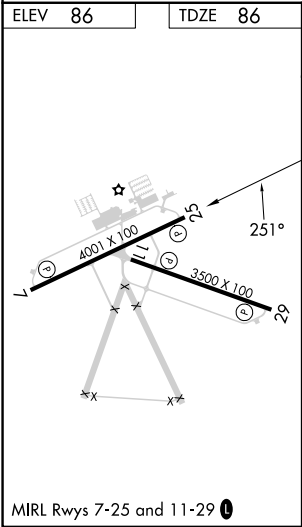


WAAS CH 63026 W25A	APP CRS 251°	Rwy Ldg TDZE Apt Elev	4001 86 86
--	------------------------	-----------------------------	---------------------------------------

RNAV (GPS) RWY 25
HERLONG RECREATIONAL (HE'G)

RNP APCH - GPS. ⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. Rwy 25 helicopter visibility reduction below ¾ SM NA. Circling Rwy 11, 29 NA at night. Baro-VNAV and VDP NA when using VQO altimeter setting. When local altimeter setting not received, use VQO altimeter setting and increase LPV DA to 394 feet; increase LNAV/VNAV DA to 616 feet and all visibilities ½ SM; increase all MDAs 20 feet and LNAV visibility Cat C/D ½ SM.		MISSED APPROACH: Climb to 2000 direct WODKU and on track 304° to REDIE and hold.	
AWOS-3 119.275	JACKSONVILLE APP CON 127.775 377.075	GCO 121.725	UNICOM 123.0 (CTAF) 0

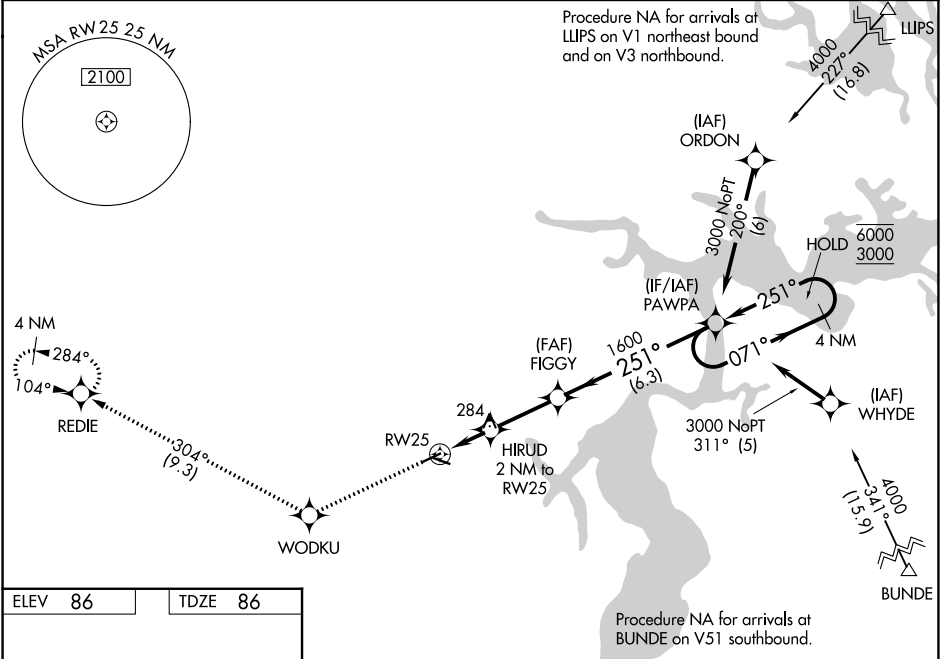

2000	WODKU	tr 304°	REDIE	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 43).				4 NM Holding Pattern
				HIRUD 2 NM to RW25	FIGGY 1600	PAWPA 1600	071° → 6000	← 251° 3000
				1.5 NM to RW21	740	1600	GP 3.00° TCH 40	
				1.5 NM	0.5 NM	2.7 NM	6.3 NM	
CATEGORY	A		B		C		D	
LPV DA			378-1		292 (300-1)			
LNAV/VNAV DA			600-1⅓		514 (600-1⅓)			
LNAV MDA	600-1		514 (600-1)		600-1⅓		514 (600-1⅓)	
CIRCLING	600-1		514 (600-1)		980-2¾ 894 (900-2¾)		980-3 894 (900-3)	

SE-3, 03 SEP 2026 to 01 OCT 2026

SE-3, 03 SEP 2026 to 01 OCT 2026