WAAS CH 45549 W16D	APP CRS 163°	Rwy Ldg 7000 TDZE 576 Apt Elev 607

RNAV (GPS) X RWY 16R

SEATTLE PAINE FLD INTL (PAE)


RNP APCH - GPS.


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -7°C or above 54°C. Baro-VNAV and VDP NA when using SEA altimeter setting. Rwy 16R helicopter visibility reduction below RVR 4000 NA. Circling Rwy 34R NA at night. Inop table does not apply to LPV all Cats. When local altimeter setting not received, use SEA altimeter setting and increase LPV DA to 914 feet; increase LNAV/VNAV DA to 1090 feet and all visibilities to RVR 5500; increase all MDAs 100 feet and LNAV visibility Cat C/D ⅜ SM, and Circling visibility Cat C ¼ SM. For inop ALS, increase LNAV Cat A/B visibility to RVR 5500.


MALSR

MISSED APPROACH: Climb to 1100 then climbing right turn to 3000 direct ECEPO and hold, continue climb-in-hold to 3000.

ATIS	SEATTLE APP CON	PAINE TOWER★	GND CON	UNICOM
128.65	128.5 306.9	132.95 (CTAF) L 256.7	121.8 339.8	122.95

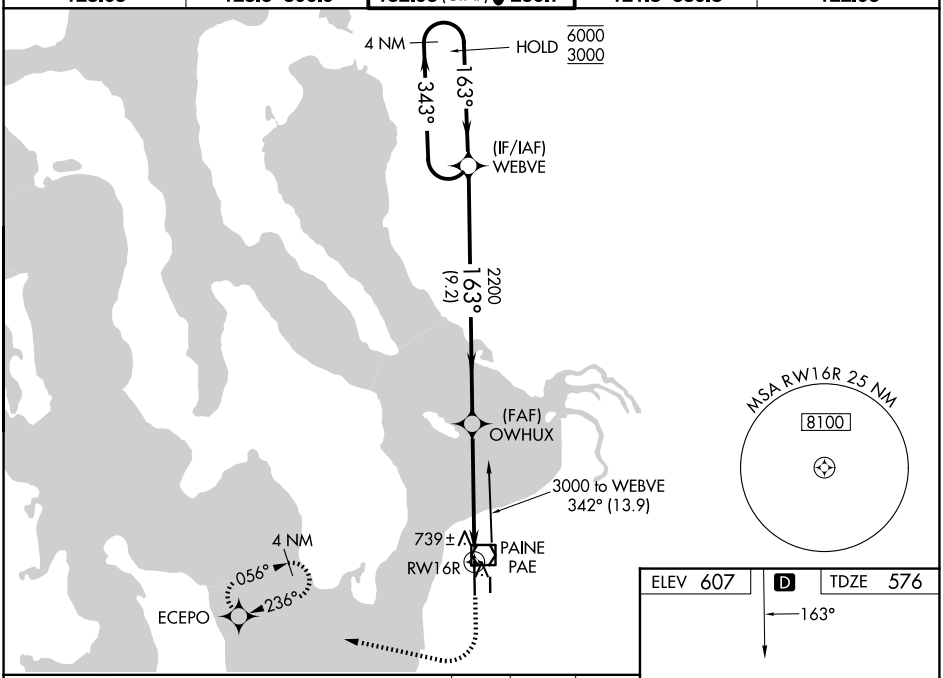

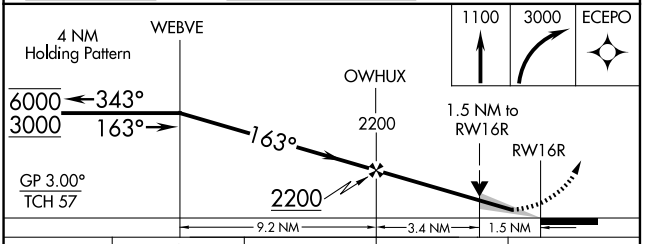

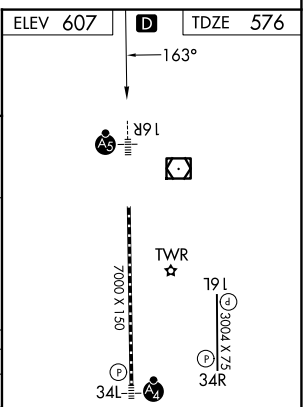

CATEGORY	A	B	C	D
LPV DA	826/40 250 (300-¾)			
LNAV/VNAV DA	1002/40 426 (400-¾)			
LNAV MDA	1120/40 544 (600-¾)		1120/55 544 (600-1)	
CIRCLING	1120-1 513 (600-1)		1120-1½ 513 (600-1½)	1160-2 553 (600-2)

TDZL/RCLS Rwy 16R
HIRL Rwy 16R-34L L
REIL Rwys 16L and 34R
MIRL Rwy 16L-34R

NW-1, 03 SEP 2026 to 01 OCT 2026
NW-1, 03 SEP 2026 to 01 OCT 2026