

WAAS CH 4041B	APP CRS 296°	Rwy Ldg TDZE 867	4304
W29A		Apt Elev 869	


RNAV (GPS) RWY 29
LUCE COUNTY (ERY)

RNP APCH - GPS.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 47°C. When local altimeter setting not received, use CIU altimeter setting: increase LPV DA to 1222 feet; increase LNAV/VNAV DA to 1344 feet; increase all MDAs 120 feet and LNAV visibility Cat C ¼ SM, LNAV visibility Cat D ½ SM, and Circling visibility Cats C/D ½ SM. Baro-VNAV NA when using CIU altimeter setting. Circling NA to Rwy 4 and 22. Rwy 29 helicopter visibility reduction below ¾ SM NA.

MISSED APPROACH:
Climb to 2700 direct
OBDUW and hold.

AWOS-3P 119.525	MINNEAPOLIS CENTER 134.6 354.05	UNICOM 122.8 (CTAF) 0
---------------------------	---	---------------------------------

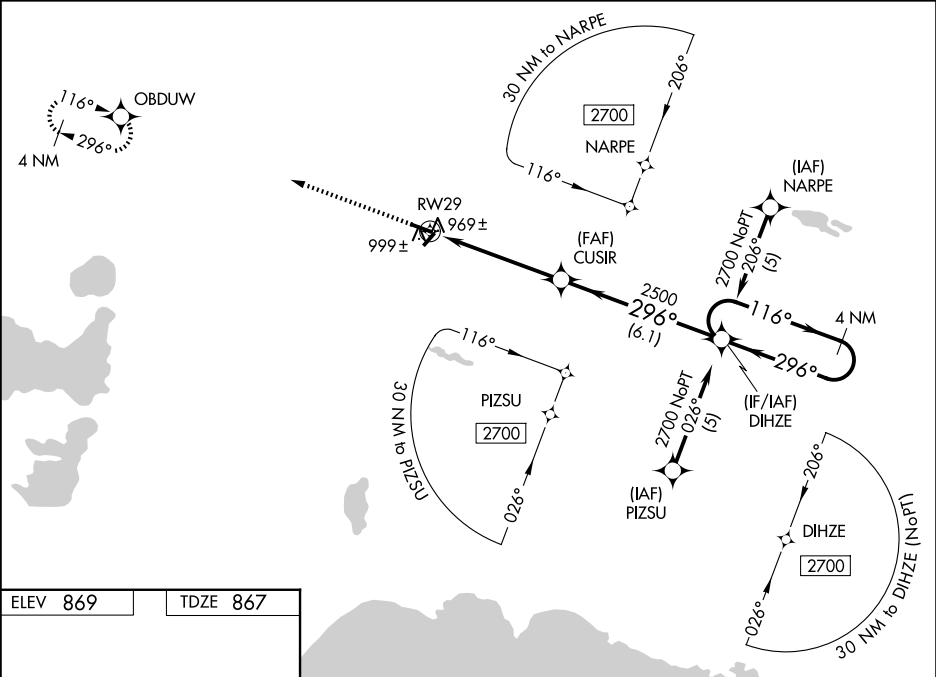

ELEV 869 TDZE 867

MIRL Rwy 11-29 0
REIL Rwy 11 and 29 0

2700

↑

OBDUW

✦

DIHZE

4 NM Holding Pattern

116° →

← 296°

2700

CUSIR

2500

296°

✖

2500

RW29

GP 3.00° TCH 40

5 NM

6.1 NM

CATEGORY	A	B	C	D
LPV DA	1117-1		250 (300-1)	
LNAV/VNAV DA	1239-1½		372 (400-1½)	
LNAV MDA	1260-1	393 (400-1)	1260-1¼ 393 (400-1¼)	1260-1¼ 393 (400-1¼)
CIRCLING	1300-1 431 (500-1)	1380-1 511 (600-1)	1460-1½ 591 (600-1½)	1560-2¼ 691 (700-2¼)

EC-1, 01 OCT 2026 to 29 OCT 2026

EC-1, 01 OCT 2026 to 29 OCT 2026