


LOC I-AAM 108.9	APP CRS 176°	Rwy Ldg TDZE Apt Elev	9001 900 901
---------------------------	------------------------	-----------------------------	---

ILS or LOC RWY 18
HECTOR INTL (FAR)

ADF or DME required for procedure entry.	MALSR	MISSED APPROACH: Climb to 2500 direct FAR VOR/DME and hold.
For inop ALS, increase S-ILS 18 Cat E visibility to RVR 4000 and S-LOC 18 Cat C/D/E visibility to RVR 5500. *RVR 1800 authorized with use of FD or AP or HUD to DA.		

ATIS 124.5 379.2	FARGO APP CON 120.4 377.15	FARGO TOWER 133.8 290.4	GND CON 121.9 348.6
----------------------------	--------------------------------------	-----------------------------------	-------------------------------

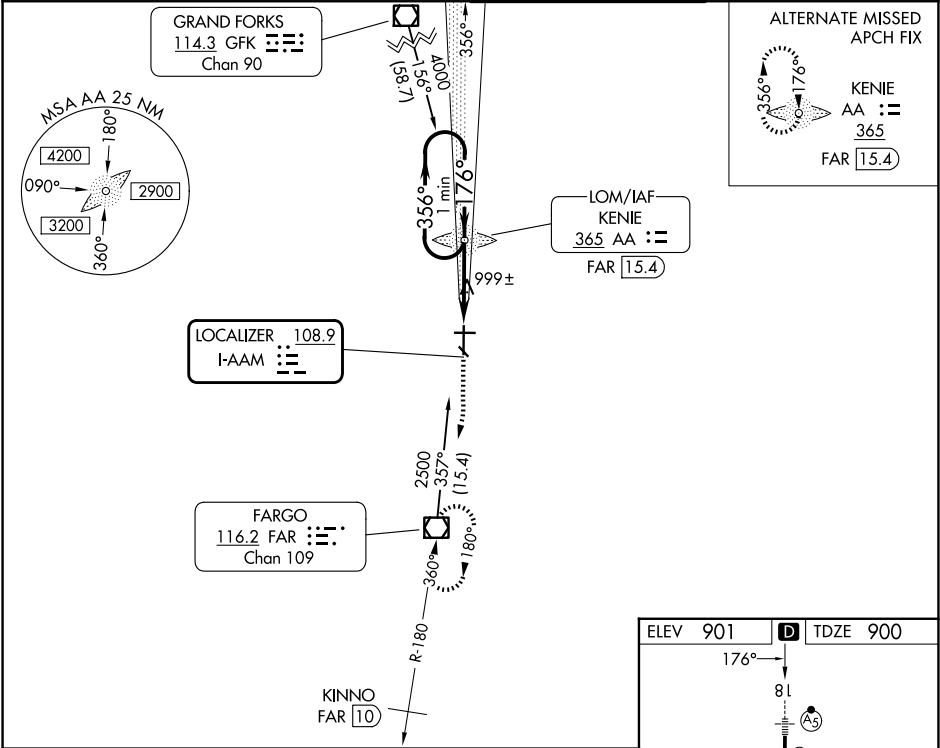

VGSI and ILS glidepath not coincident (VGSI Angle 3.00/TCH 68).					2500	FAR
One Minute Holding Pattern					2500	FAR
GS 3.00° TCH 51					2500	FAR
4.6 NM					2500	FAR
CATEGORY	A	B	C	D	E	
S-ILS 18*	1100/24 200 (200-½)					
S-LOC 18	1260/24	360 (400-½)	1260/30	360 (400-¾)	1260/40	360 (400-¾)
CIRCLING	1380-1	479 (500-1)	1520-1¾	619 (700-1¾)	1620-2¼	1620-2½
FARGO APP CON					120.4	377.15
FARGO TOWER					133.8	290.4
GND CON					121.9	348.6
KNOTS					60	90
MIN:SEC					4:36	3:04

NC-1, 01 OCT 2026 to 29 OCT 2026