

WAAS CH 93604 W07A	APP CRS 065°	Rwy Ldg TDZE 990 Apt Elev 993
--	------------------------	---

RNAV (GPS) RWY 7

MARION MUNI (MNN)

RNP APCH - GPS



▼

▲

When local altimeter setting not received, use OSU altimeter setting: increase LPV DA to 1327 feet; increase LNAV/VNAV DA to 1466 feet; increase all MDAs 100 feet and LNAV visibility Cat C ¼ SM, LNAV visibility Cat D ½ SM, and Circling visibility Cat C/D ¼ SM. Baro-VNAV NA when using OSU altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. Visibility reduction by helicopters NA.

MISSED APPROACH:
Climb to 3000 direct
LEBJE and hold.

ASOS 135.225	CLEVELAND APP CON ★ 128.35 360.65	CLNC DEL 126.8	UNICOM 122.8 (CTAF) 0
------------------------	---	--------------------------	---------------------------------

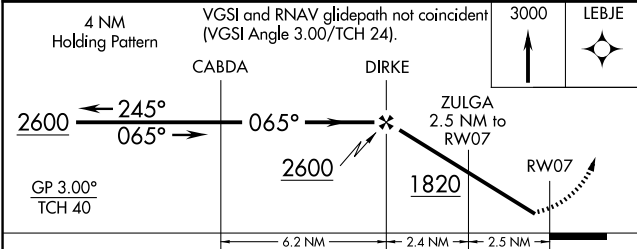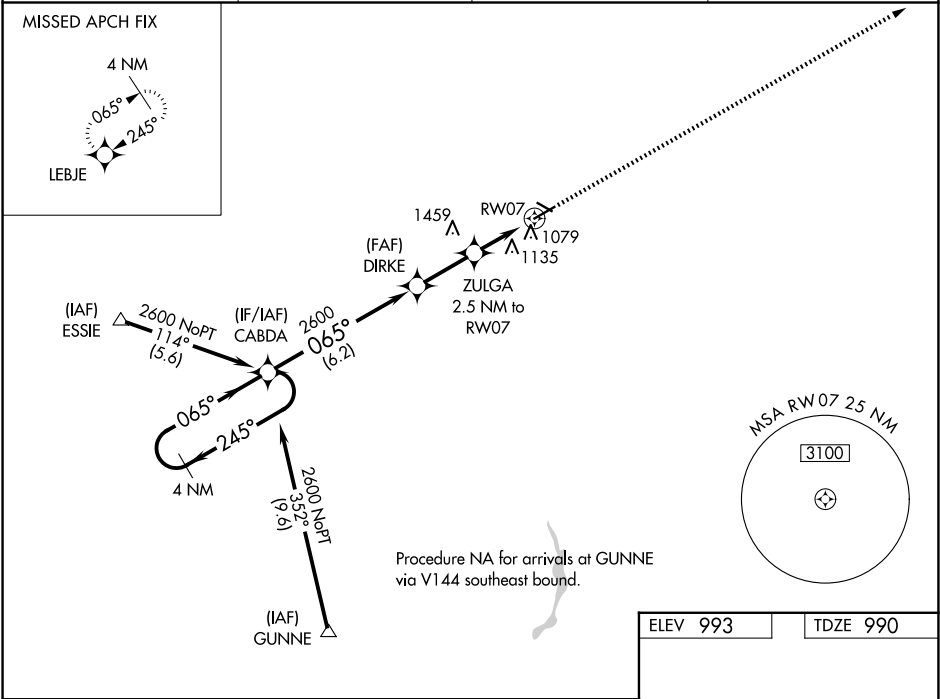

CATEGORY	A	B	C	D
LPV DA		1240-1	250 (300-1)	
LNAV/VNAV DA		1379-1½	389 (400-1½)	
LNAV MDA	1440-1	450 (500-1)	1440-1⅜ 450 (500-1⅜)	1440-1½ 450 (500-1½)
CIRCLING	1480-1 487 (500-1)	1500-1 507 (600-1)	1700-2 707 (800-2)	1820-2¾ 827 (900-2¾)

